
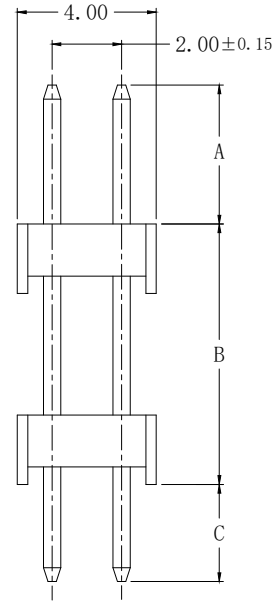


版次	变更内容	审核	日期

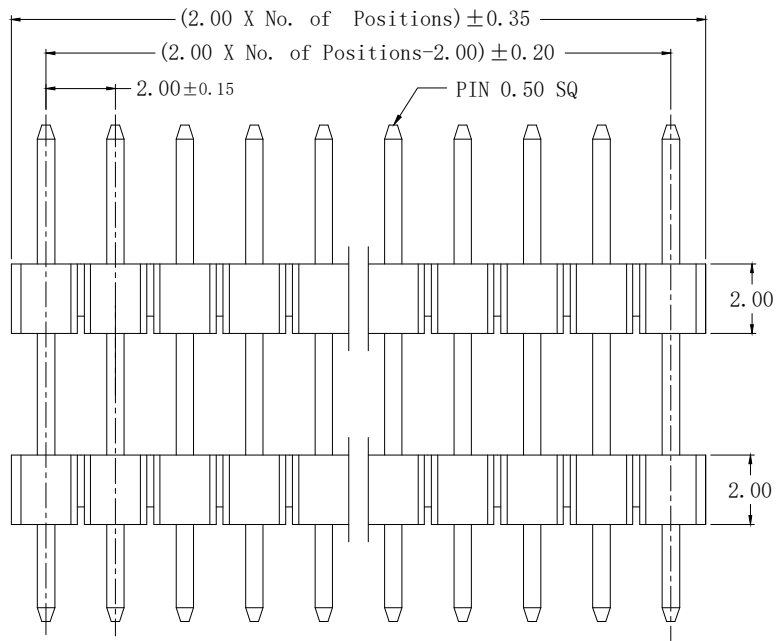

EC2.0D-2DLS-2\*xxP G-A/ B/ C

单排芯数  
01~40P

电镀

G: 镀金Gold Flash  
1G: 镀金1u"  
3G: 镀金3u"  
(镀金可订制)

针长  
(可订制)

塑高  
(可订制)


针长  
(可订制)

弯曲度: 2\*02P ~ 2\*20P 0.30 MAX.  
2\*21P ~ 2\*30P 0.40 MAX.  
2\*31P ~ 2\*40P 0.50 MAX.

技术参数: SPECIFICATIONS

额定电流 (Current Rating): 2A  
绝缘电阻 (Insulation Resistance): 1000MΩ Min.  
额定电压 (Dielectric Withstanding Voltage): AC 500V  
工作温度 (Operating Temperature): -40°C ~ +105°C  
最大加工温度 (Max Processing Temp): (230°C for 30~60 seconds)  
(260°C for 10 seconds)

接触材料 (Contact Material): 黄铜(Brass)  
塑胶材料 (Insulator Material): 尼龙(Nylon)-9T UL 94V-0  
接触电镀 (Contact Plating): 镀金 (Gold plated)  
(电镀规格可根据客户要求来定制)  
Opitonal planting on request.

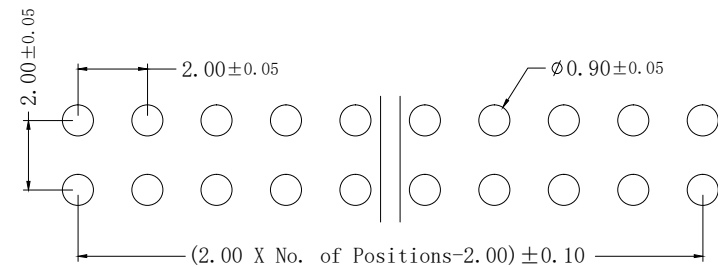

Recommended PCB Layout

公差:	版次:	A			<b>易芯精密科技(浙江)有限公司</b> Easychips Precision Technology (Zhejiang) Co.,Ltd.	型号: EC2.0D-2DLS-2*xxPG-A/B/C 描述: 2.0双排双塑直脚排针			
. X ±0.35	比例:								
. XX ±0.25	单位:	mm							
. XXX ±2°	页码:	1/1							
LNLB	图号:								