
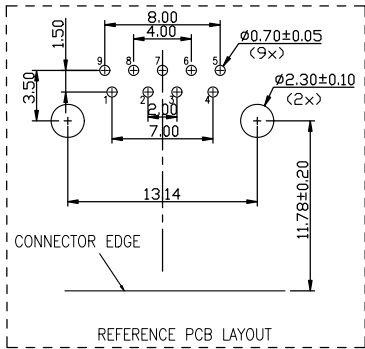



目錄 MAPX	設 變 內 容 MODIFICATION	日 期 DATE



SPECIFICATIONS:

Contact current Rating:
1.8 Amperes for pin1&pin4.
0.25 Amperes other contacts





Dielectric Withstanding Voltage:AC 100V(RMS)
Insulation resistance:100Megohms Minimum.

Contact Resistance:
30mΩ Max for pin1&pin4
50mΩMax for other contacts

Mechanical Characteristics:
Mating Force:35 Newtons.Maximum
Unmating Force:10 Newtons.Minimum.

MATERIAL: 8N Min After Durability
Housing: PBT+30%GF 94V-0 COLOR:BLUE
Contact: copper alloy(T=0.25mm)
Shell: Brass

PLATING:
Contact: Au Plated on contact area
Tin Plated on solder area
Nickel underplating over all
Shell: Nickel Plated
operating Temperature:-55'to+85'



产品图 PRODUCT CHART DWG		易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co.,Ltd.					
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	产品料号 PRODUCT PART NO.	A901-EC112A105AD10100	
X.	±0.25	X'.	±5'	比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NO.
.X	±0.20	.X'.	±2'	日期 DATE	2009/10/20	核准 APPD	角法 VIEW
.XX	±0.15	.XX'.	±1'				版本 VER
.XXX	±0.10	.XXX'.	±0.5'				A0