
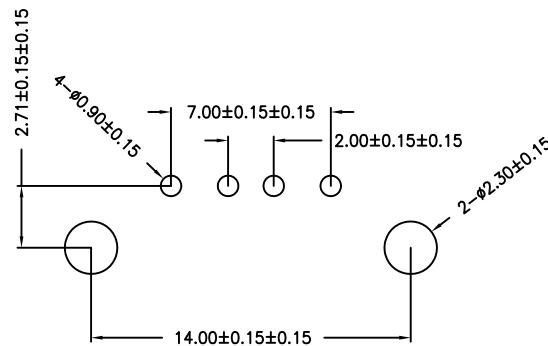
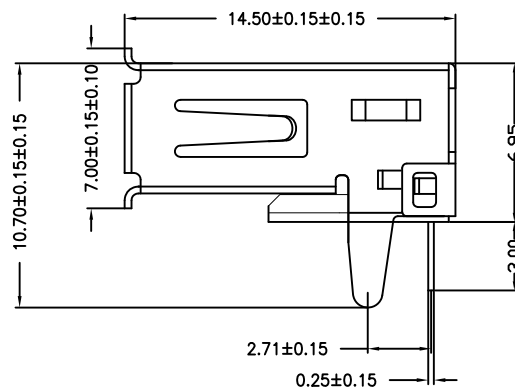
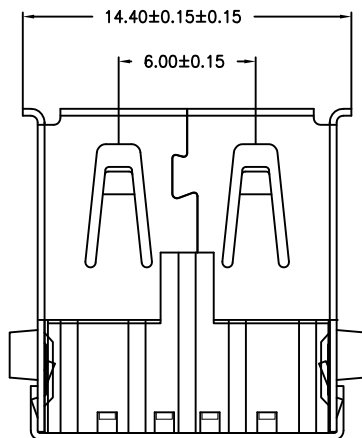


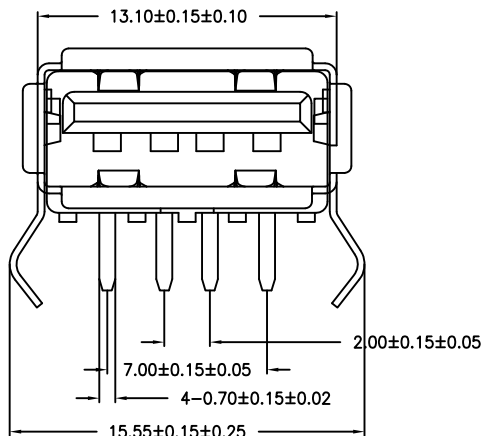

RBCOMMENDBD P.C.B PATTBRN LAYO UT

MAPX

MODIFICATION

DATE

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance:30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35°C to +85°C

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:

01: Selective Gold Flash

02: Selective Gold 3U"

03: Selective Gold 5U"

04: Selective Gold 15U"

05: Selective Gold 30U"

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°



易芯精密科技(浙江)有限公司

Easychips Precision Technology (Zhejiang) Co., Ltd.

单位	MM	制图	Z-Y-B	制图料号	A901-EC132A1011D10210
UNITS	MM	DRAWING		PRODUCT PART NO.	
比例	1:1	审核		产品名称	AF90度外扣弯脚有边内弹14.5
SCALE	1:1	CHKD		PRODUCT NO.	铜壳T型PBT白胶
日期	2013.07.25	核准		角法	版本
DATE	2013.07.25	APPD		VIEW	VER