


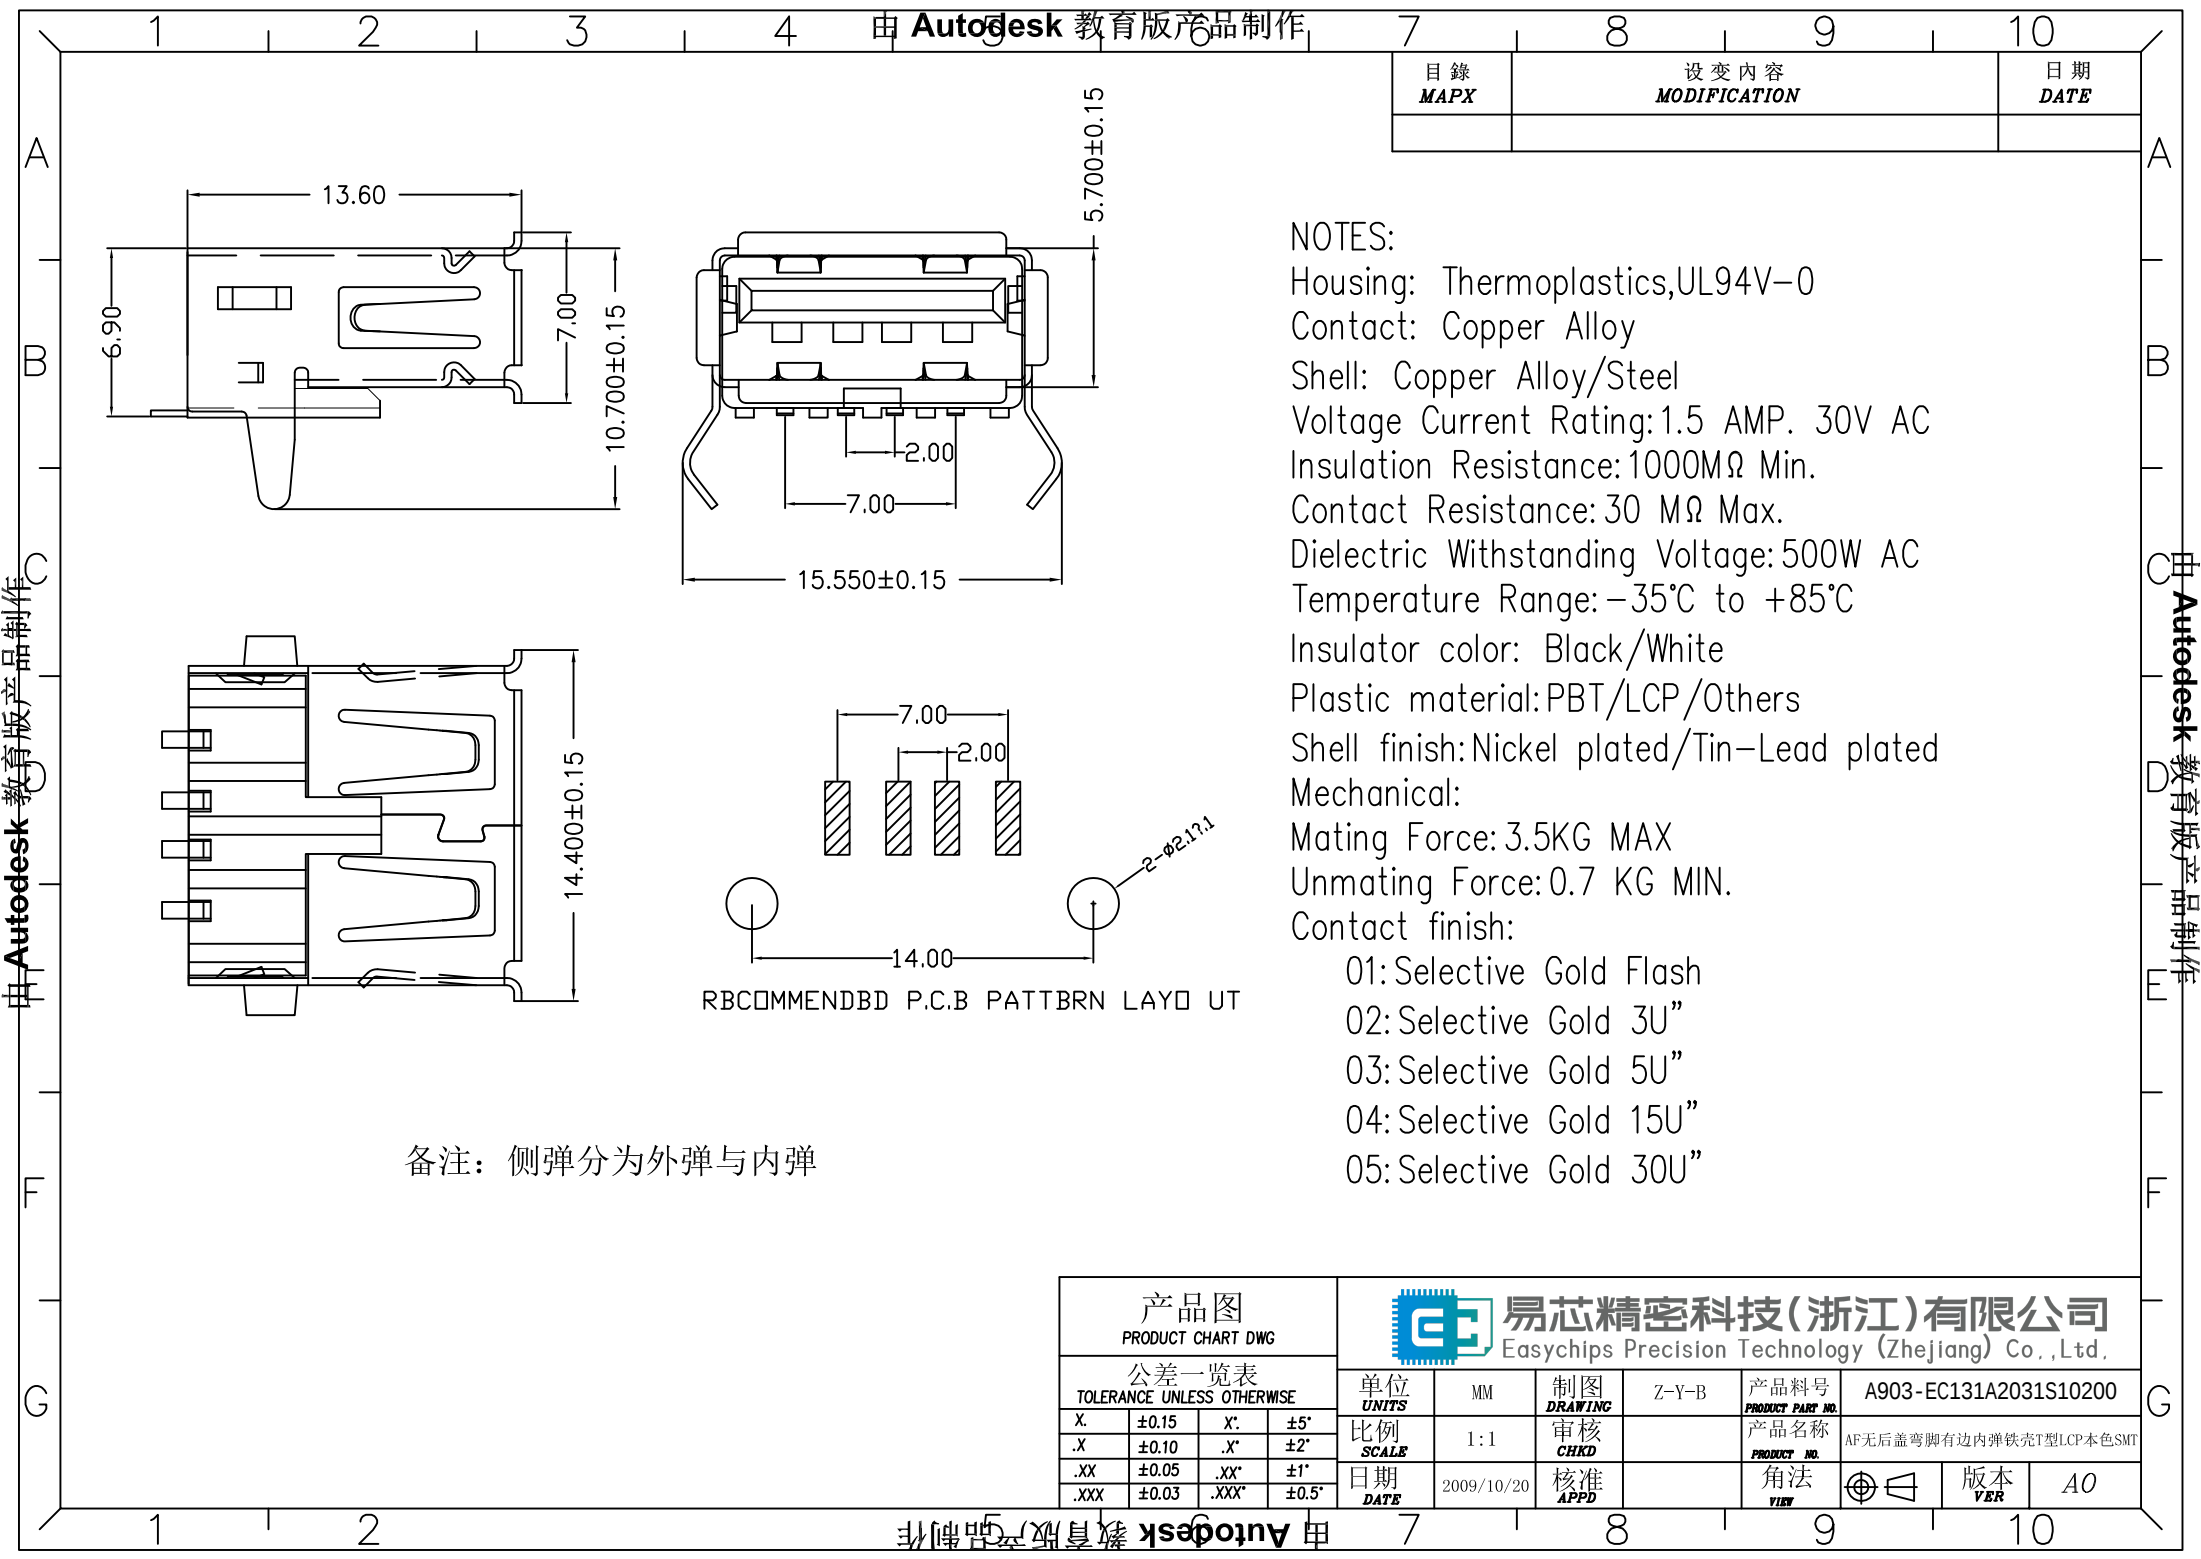

备注：侧弹分为外弹与内弹

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance:30 MΩ Max.

Dielectric Withstanding Voltage:500V AC

Temperature Range:-35℃ to +85℃

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:

01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"

04:Selective Gold 15U"

05:Selective Gold 30U"

产品图 PRODUCT CHART DWG				易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	产品料号 PRODUCT PART NO.
X.	±0.15	X'	±5°	比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NO.
.XX	±0.10	.XX'	±2°	日期 DATE	2009/10/20	核准 APPD	角法 VIEW
.XX	±0.05	.XX'	±1°				AF无后盖弯脚有边内弹铁壳T型LCP本色SMT
.XXX	±0.03	.XXX'	±0.5°				版本 VER
							A0