
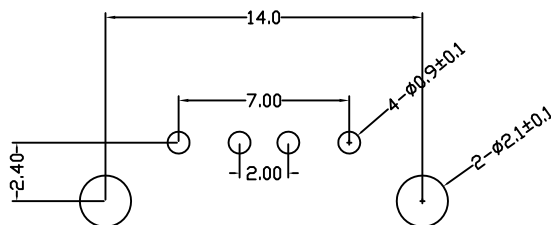
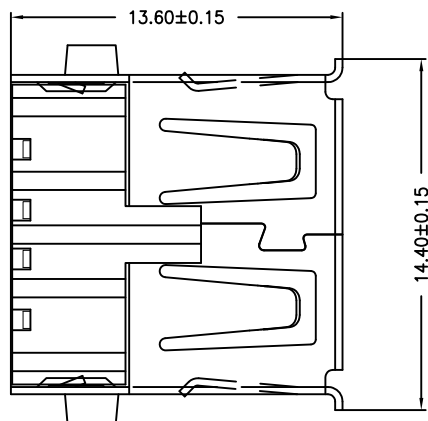
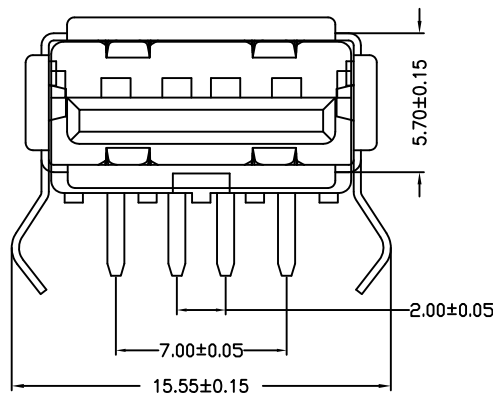


目 録 <i>MAPX</i>	設 変 内 容 <i>MODIFICATION</i>	日 期 <i>DATE</i>

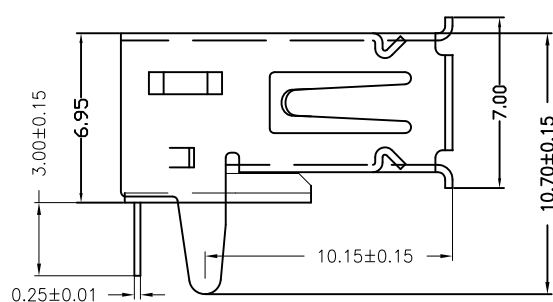

PCB LAYOUT

备注：侧弹分为外弹与内弹

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating: 1.5 AMP. 30V AC

Insulation Resistance: 1000M Ω Min.

Contact Resistance: 30 MΩ Max.

Dielectric Withstanding Voltage: 500W AC

Temperature Range: -35°C to $+85^{\circ}\text{C}$

Insulator color: Black/White

Plastic material: PBT/LCP/Others

Shell finish: Nickel plated/Tin-Lead plated

Mechanical:

Mating Force: 3.5KG MAX

Unmating Force: 0.7 KG MIN.

Contact finish:

01: Selective Gold Flash

02: Selective Gold 3U"

03: Selective Gold 5U"

04: Selective Gold 15U"

05: Selective Gold 30U"

产品图 PRODUCT CHART DWG				 易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co.,Ltd.							
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	A903-EC131B1011D10100		
X	±0.25	X'	±5*	比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF90度无后盖弯脚有边内弹铁壳 T型PBT白胶		
.X	±0.20	.X"	±2*	日期 DATE	2009/10/20	核准 APPD	画法 VIEW		版本 VER	A0	
.XX	±0.15	.XX"	±1*								
.XXX	±0.10	.XXX"	±0.5*								