


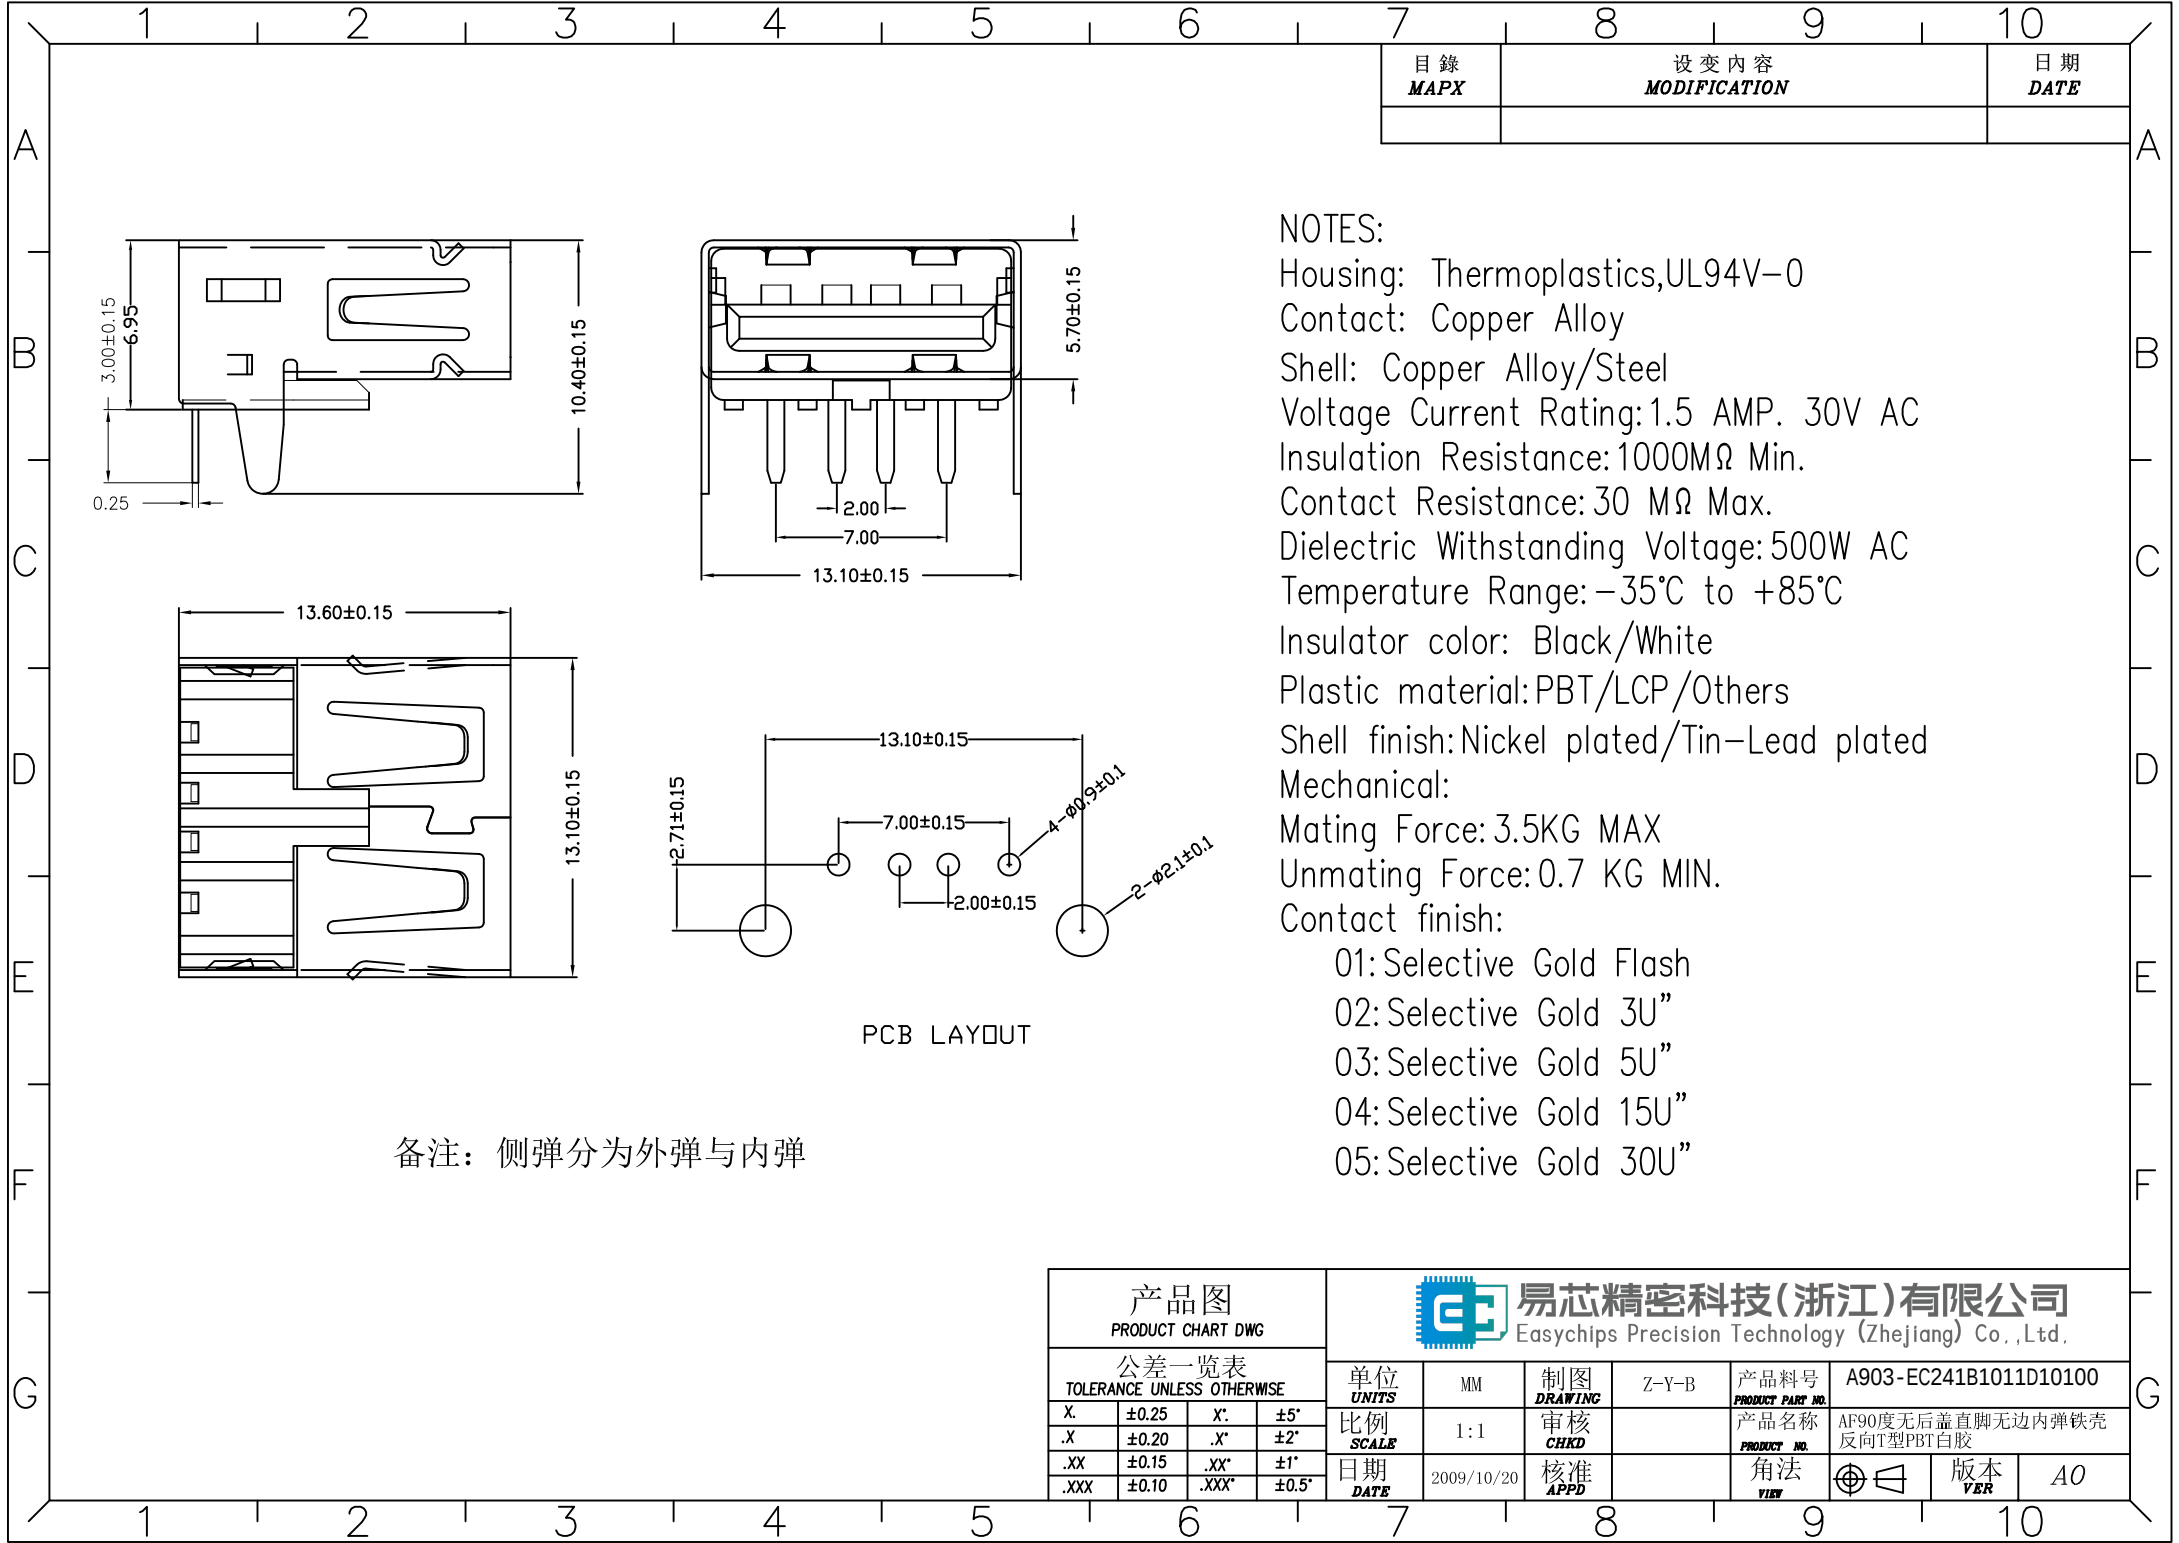

目錄 MAPX	设变内容 MODIFICATION	日期 DATE

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance:30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35℃ to +85℃

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:

01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"

04:Selective Gold 15U"

05:Selective Gold 30U"

备注：侧弹分为外弹与内弹

产品图 PRODUCT CHART DWG		易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co.,Ltd.			
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	Z-Y-B
X.	±0.25	X'	±5'	审核 CHKD	产品料号 PRODUCT PART NO.
.X	±0.20	.XX'	±2'	日期 DATE	产品名称 PRODUCT NO.
.XX	±0.15	.XXX'	±1'	2009/10/20	AF90度无后盖直脚无边内弹铁壳 反向T型PBT白胶
.XXX	±0.10		±0.5'	核准 APPD	角法 VIEW
		版本 VER	核准 APPD	角法 VIEW	A0