


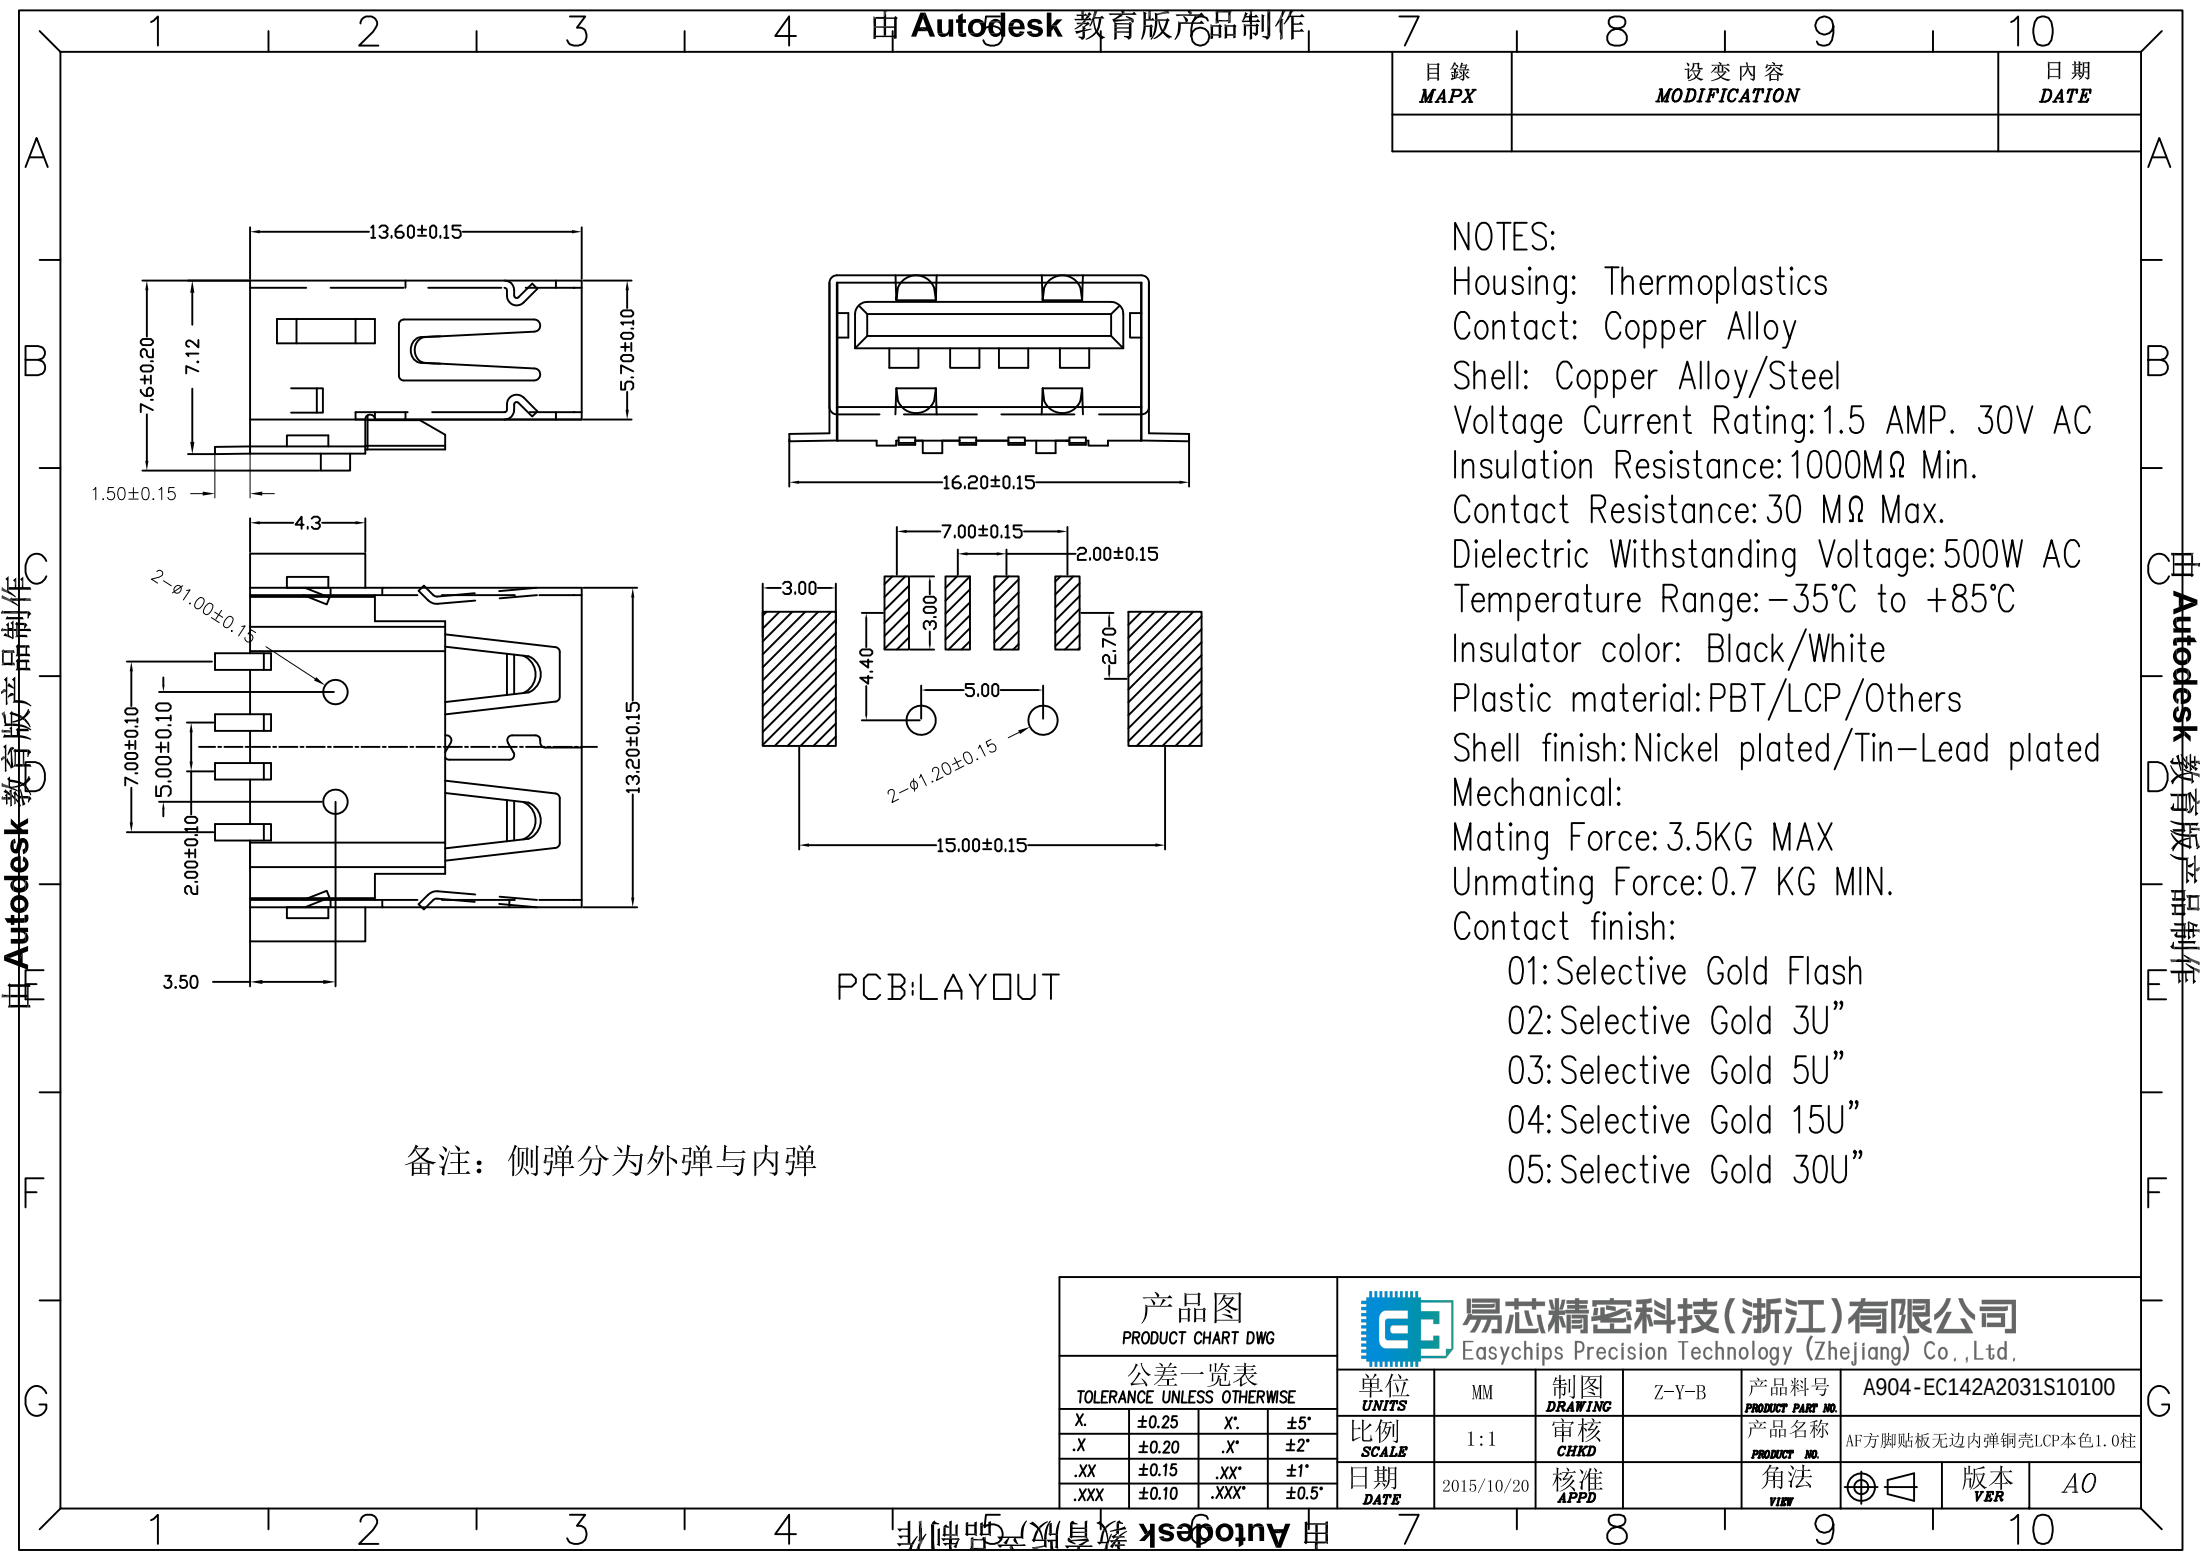

备注：侧弹分为外弹与内弹

PCB LAYOUT

NOTES:

- Housing: Thermoplastics
- Contact: Copper Alloy
- Shell: Copper Alloy/Steel
- Voltage Current Rating:1.5 AMP. 30V AC
- Insulation Resistance:1000MΩ Min.
- Contact Resistance:30 MΩ Max.
- Dielectric Withstanding Voltage:500W AC
- Temperature Range:−35℃ to +85℃
- Insulator color: Black/White
- Plastic material:PBT/LCP/Others
- Shell finish:Nickel plated/Tin-Lead plated
- Mechanical:
- Mating Force:3.5KG MAX
- Unmating Force:0.7 KG MIN.
- Contact finish:
- 01:Selective Gold Flash
- 02:Selective Gold 3U”
- 03:Selective Gold 5U”
- 04:Selective Gold 15U”
- 05:Selective Gold 30U”

产品图 PRODUCT CHART DWG				易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.				
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.
X.	±0.25	X'	±5°	比例 SCALE	1:1	审核 CHKD		A904-EC142A2031S10100
.X	±0.20	.X'	±2°	日期 DATE	2015/10/20	核准 APPD		产品名称 PRODUCT NO.
.XX	±0.15	.XX'	±1°					角法 VIEW
.XXX	±0.10	.XXX'	±0.5°					版本 VER
								A0