
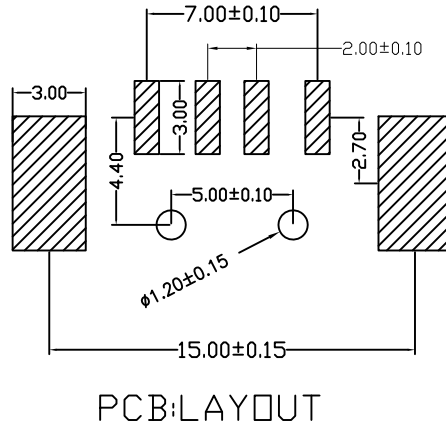
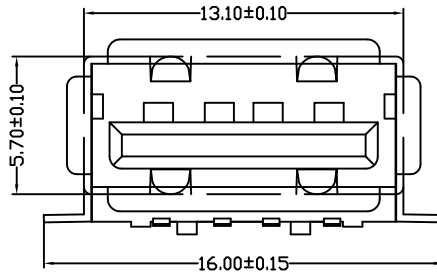


由Autodesk教育版产品制作

由Autodesk教育版产品制作

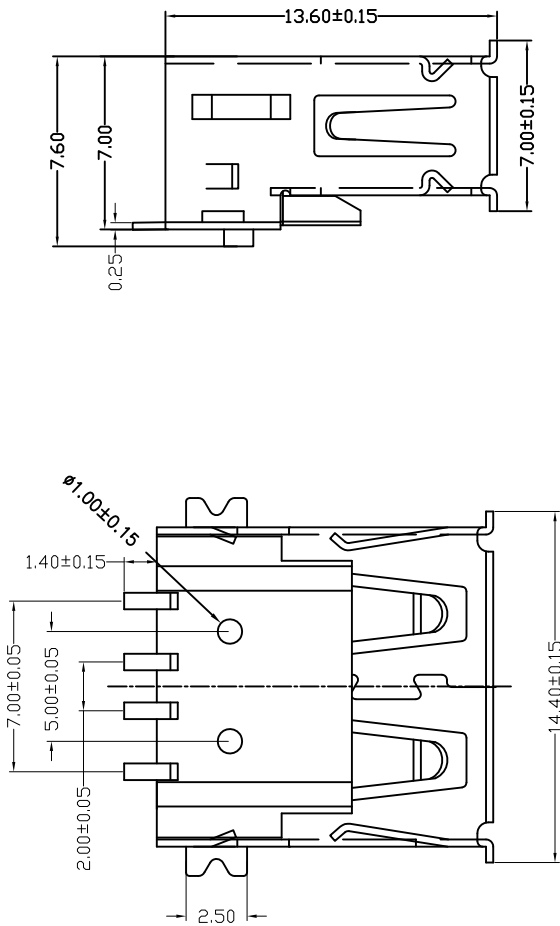

备注：侧弹分为外弹与内弹

目錄 MAPX
△

設 變 內 容 MODIFICATION
側彈變更

日 期 DATE
2013. 3. 10

NOTES:

Housing: Thermoplastics

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance:30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:−35℃ to +85℃

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:

01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"

04:Selective Gold 15U"

05:Selective Gold 30U"

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.25	X'.	±5'
.X	±0.20	.X'	±2'
.XX	±0.15	.XX'	±1'
.XXX	±0.10	.XXX'	±0.5'



易芯精密科技(浙江)有限公司

Easychips Precision Technology (Zhejiang) Co., Ltd.

单位 UNITS	MM	制图 DRAWING	Z-Y-B	产品料号 PRODUCT PART NO.	A904-EC232B2031S10100
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	AF鱼叉脚贴板有边内弹铜壳反向 LCP本色1.0柱
日期 DATE	2015. 09. 01	核准 APPD		角法 VIEW	⊕ ⊖
				版本 VER	A0