
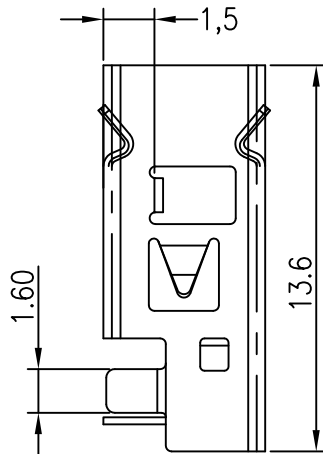
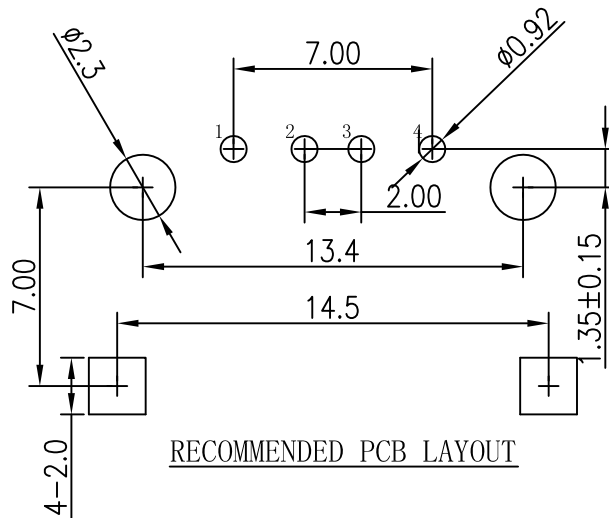
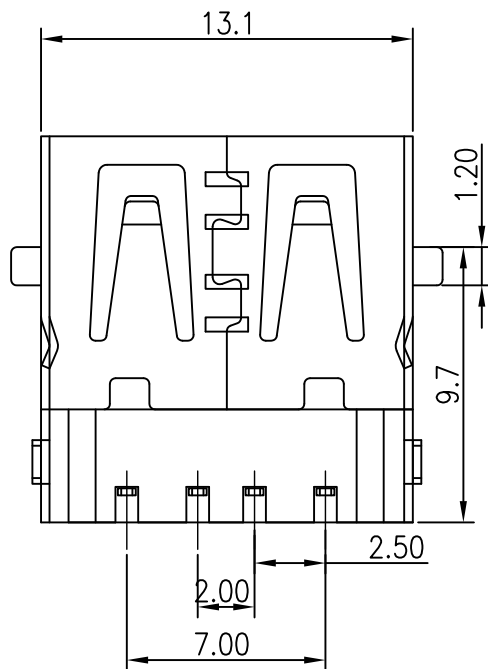


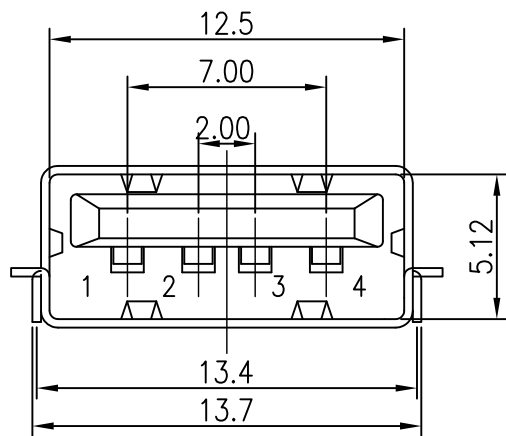

MAPX

MODIFICATION

DATE

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.0kgf(MIN)

原材料:Material:

1. 塑胶:Housing:
Hing Temperature Thermoplastics,
UL 94V-0 PBT White/Black
2. 端子:Contact:Copper Alloy C2680
3. 外壳:Shell: Copper Alloy SPCC

电镀:Finish:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳:Shell:
Nickel Plating

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

易芯精密科技(浙江)有限公司
Easychips Precision Technology (Zhejiang) Co., Ltd.单位
UNITS

MM

制图
DRAWING制图料号
PRODUCT PART NO.

A905-EC761A2022S10205

比例
SCALE


1:1

审核
CHKD产品名称
PRODUCT NAME

AF沉板四脚前贴后插13.6无边铁壳LCP黑胶DIP

日期
DATE

2021-04-12

核准
APPD角法
VIEW版本
VER

A0