
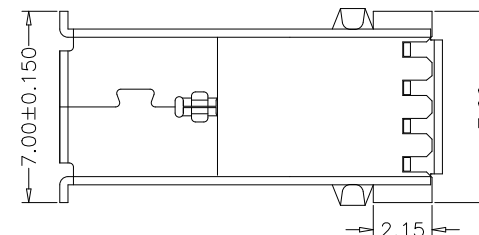
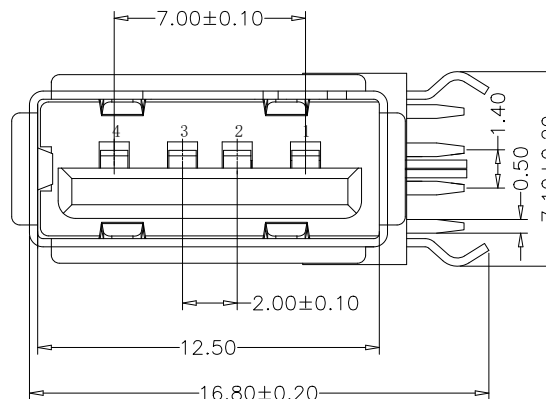


USB A/F侧立短体4PIN (B款脚) 无边14.0

REV

MODIFICATION

DATE

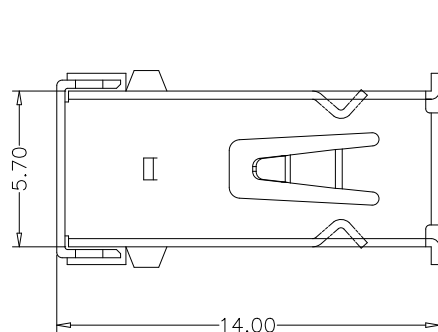

NOTE:

1. Material:

Housing: Thermoplastics, UL94V-0 (ROHS, HF)

Contact: Phosphor Bronze C5191-EH/C2680-EH, T=0.25mm

Shell: COPPER ALLOY T=0.30mm

2. FINISH:

Contact: 15u" Gold Plated on Contact Area,
80u" Min. Tin Plated on Solder Area

50u" Min. Nickel Underplating Over All.

Shell: 50u" Min. Nickel Underplating Over All.

3. Specification:

3.1: Rating:

Rated voltage 500V AC/DC. Rated current: 2 A Max.

3.2: Electrical:

Insulation Resistance (EIA-364-21):

1000MΩ Min. at 500V/DC for 1Minute.

Contact Resistance (EIA-364-23):

30 mΩ Max. at 20mV Max, 50mA

Dielectric Withstanding Voltage (EIA-364-20):

No discharge, flashover or breakdown at 500V/AC 1Minute

4. Plug extraction force shall be between 1.0kgf and 2.00kgf

5. Contact finish:



01: Selective Gold Flash

02: Selective Gold 3U"

03: Selective Gold 5U"

04: Selective Gold 15U"

05: Selective Gold 30U"

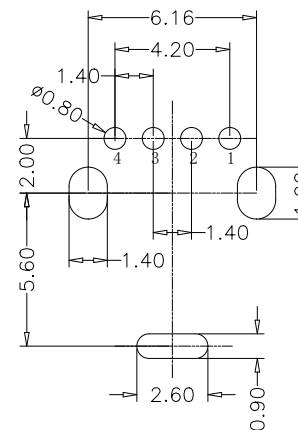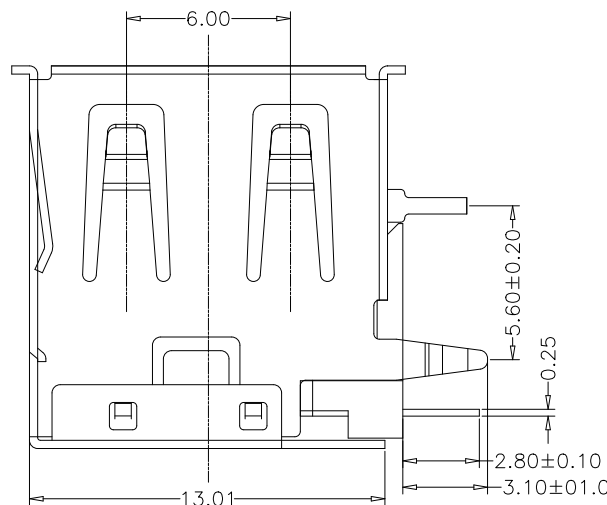

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCES: ±0.05


产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X	±0.25	X	±5°
.X	±0.20	.X	±2°
.XX	±0.15	.XX	±1°
.XXX	±0.10	.XXX	±0.5°



易芯精密科技(浙江)有限公司

Easychip Precision Technology (Zhejiang) Co., Ltd.

单位

MM

制图

Z-Y-B

制图料号

A906-EC351A1011D10200

比例

1:1

审核

产品名称

AF14.0侧插短体外弯内直有边铁壳PBT白胶

日期

2013.10.31

核准

角法

版本

A0

APPD

角法

版本

REV

A0