

A

B







C

D

E

F

G

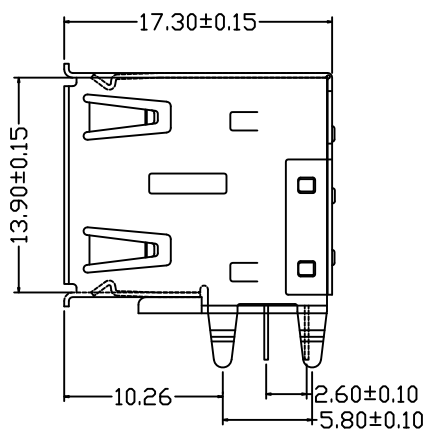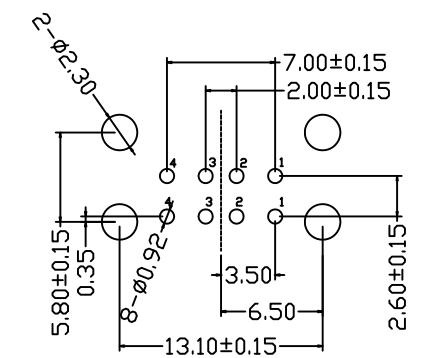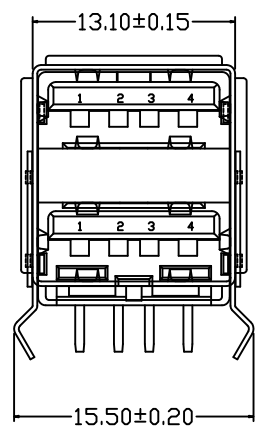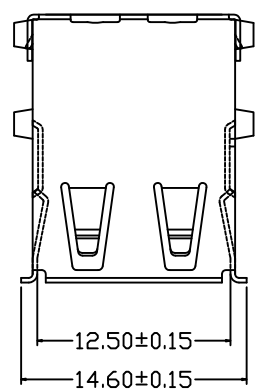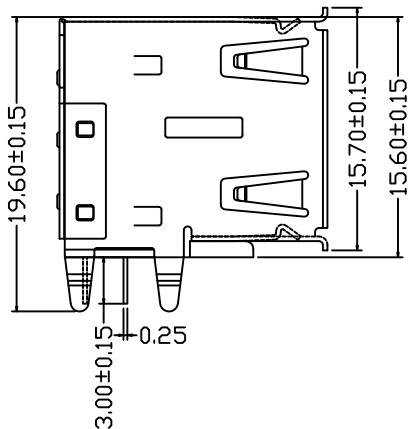

MAPX	MODIFICATION	DATE

特性:Specificaions

电气:Eleelrical:

1. 接触阻抗:Contact Resistance
30 milliohms MAX
2. 耐电压:Dielectnec Withstanding Voitage:
500 V AC AT Sea Levöl
3. 绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

机构:Mechanical:

1. 结合为:Mating Force:
4.0KG NAX 最大4kg
2. 拔出力:Unmating Force:
0.5 KG NIN 最少0.5kg

材料:Matorial:

1. 塑胶:Housing:Hing Temperature Tnermaplastio
2. 端子:Contact:Copper Alloy 铜合金
3. 外壳:Shell: Copper Aiioy铁/铜合金

电镀:Finish:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talis
接触点镀金. 脚镀锡
2. 外壳:Shell:

Nickel Plating 镀镍

产品图 PRODUCT CHART DWG				易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co.,Ltd.					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	A907-EC111A1012D10200
X.	±0.25	X.	±5.°	比例 SCALE	1:1	审核 CHKD	L-Y-J	产品名称 PRODUCT NO.	AF90度17.0双层半包弯脚小卷边平 弹铁壳PBT白胶端子间距2.6
.X	±0.20	.X	±2.°	日期 DATE	2014.06.09	核准 APPD	L-Y-J	角法 VIEW	
.XX	±0.15	.XX	±1.°					版本 VER	A0
.XXX	±0.10	.XXX	±0.5°						