
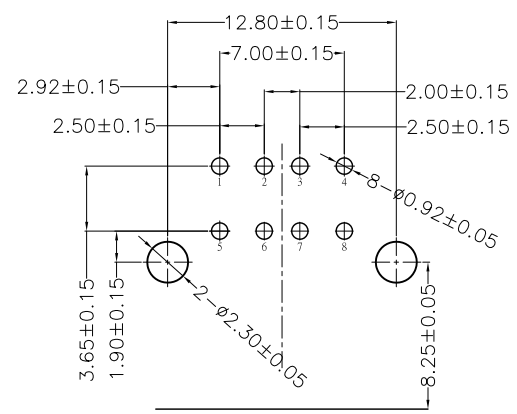
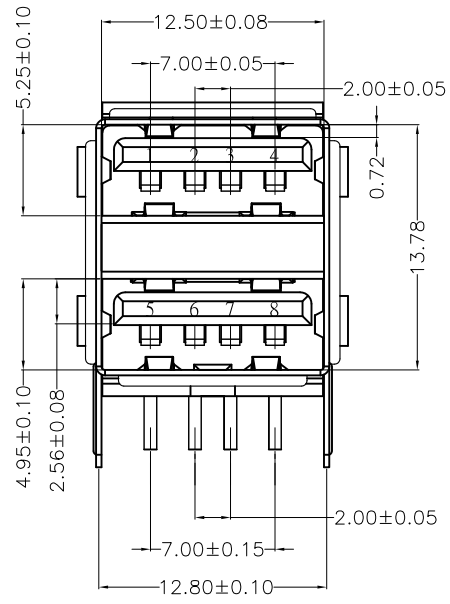
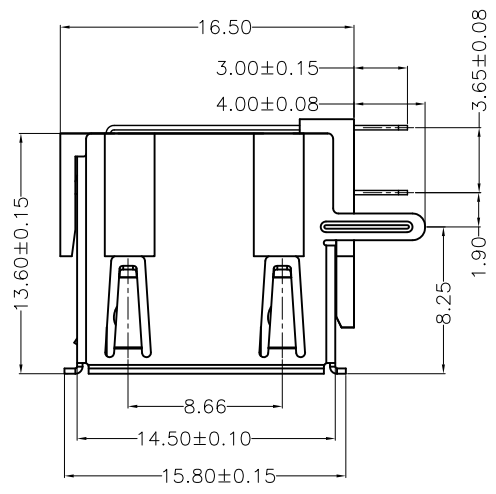


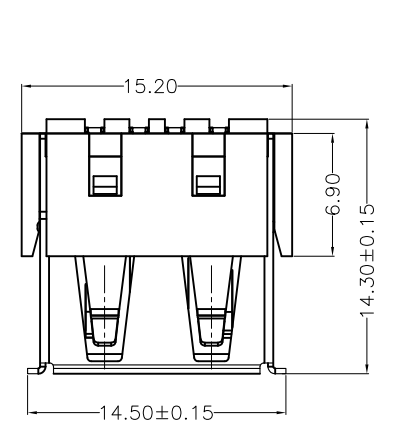

PCB Layout

NOTES:

- 1. HOUSING: SEE NOTES, UL94V-0 .
- TERMINAL: SEE NOTES.
- SHELL: SEE NOTES.

SPECIFICATION:

- 1. ELECTRICAL CHARACTERISTIC:
 - CONTACT RESISTANCE: 30MΩ MAX
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 - INSULATION RESISTANCE: 1000MΩ MIN
- 2. MECHANICAL CHARACTERISTIC:
 - INSERTION FORCE: 35N(3.57KGF) MAX
 - EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN
- 3. Contact finish:
 - 01:Selective Gold Flash
 - 02:Selective Gold 3U"
 - 03:Selective Gold 5U"
 - 04:Selective Gold 15U"
 - 05:Selective Gold 30U"

产品图				易芯精密科技(浙江)有限公司			
PRODUCT CHART DWG				Easychips Precision Technology (Zhejiang) Co.,Ltd.			
公差一览表				单位	MM	制图	Z-Y-B
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING	
X	±0.25	X	±5.°	比例	1:1	审核	
.X	±0.20	.X	±2.°	SCALE		CHKD	
.XX	±0.15	.XX	±1.°	日期	2014.05.06	核准	
.XXX	±0.10	.XXX	±0.5°	DATE		APPD	
				制图料号	A907-EC211A1021D10200		
				产品名称	AF90度14.5双层短体直脚有边铁壳PBT黑胶		
				角法	角法		
				版本	A0		
				VER			