
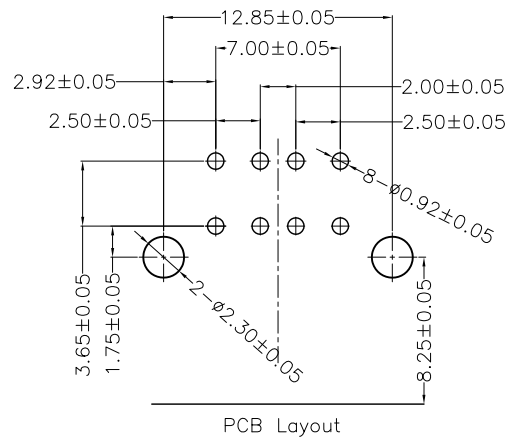
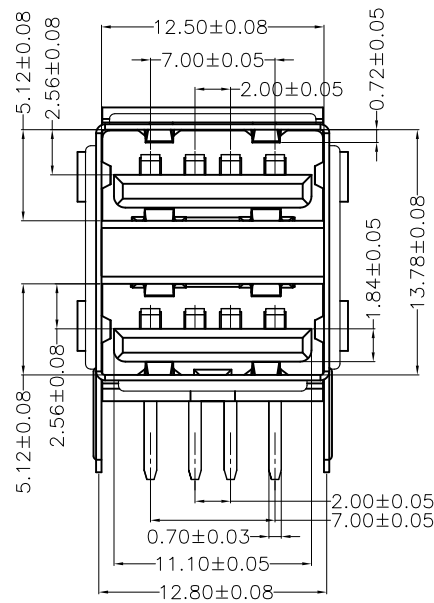
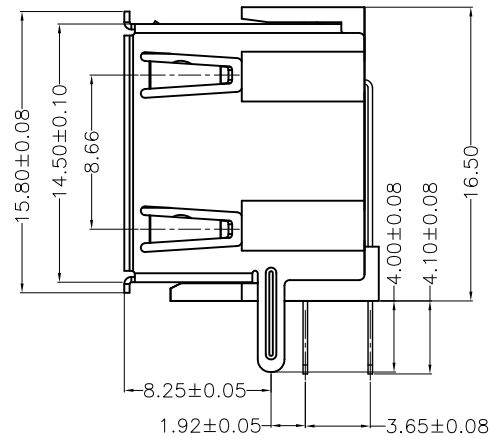


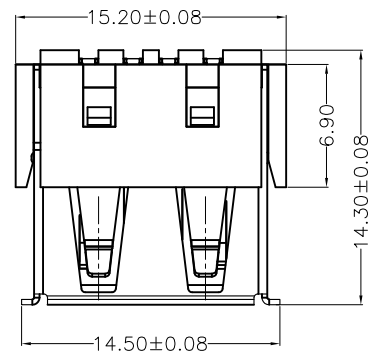

### NOTES:

1. HOUSING: SEE NOTES, UL94V-0 .
- TERMINAL: SEE NOTES.
- SHELL: SEE NOTES.

### SPECIFICATION:

1. ELECTRICAL CHARACTERISTIC:
  - CONTACT RESISTANCE: 30MΩ MAX
  - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
  - INSULATION RESISTANCE: 1000MΩ MIN
2. MECHANICAL CHARACTERISTIC:
  - INSERTION FORCE: 35N(3.57KGF) MAX
  - EXTRACTION FORCE: 10~35N(1.02~3.57KGF) MIN
3. Contact finish:
  - 01:Selective Gold Flash
  - 02:Selective Gold 3U"
  - 03:Selective Gold 5U"
  - 04:Selective Gold 15U"
  - 05:Selective Gold 30U"

### 产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

| X    | ±0.15 | X    | ±5.°  |
|------|-------|------|-------|
| .X   | ±0.10 | .X   | ±2.°  |
| .XX  | ±0.05 | .XX  | ±1.°  |
| .XXX | ±0.03 | .XXX | ±0.5° |



易芯精密科技(浙江)有限公司  
Easychips Precision Technology (Zhejiang) Co., Ltd.

|             |            |               |       |                         |                                |
|-------------|------------|---------------|-------|-------------------------|--------------------------------|
| 单位<br>UNITS | MM         | 制图<br>DRAWING | Z-Y-B | 制图料号<br>PRODUCT PART NO | A907-EC211B1021D10200          |
| 比例<br>SCALE | 1:1        | 审核<br>CHKD    |       | 产品名称<br>PRODUCT NAME    | AF90度14.5双层短体直脚有边<br>铁壳反向PBT黑胶 |
| 日期<br>DATE  | 2010.05.06 | 核准<br>APPD    |       | 角法<br>VIEW              | 版本<br>VER                      |
|             |            |               |       |                         | A0                             |