


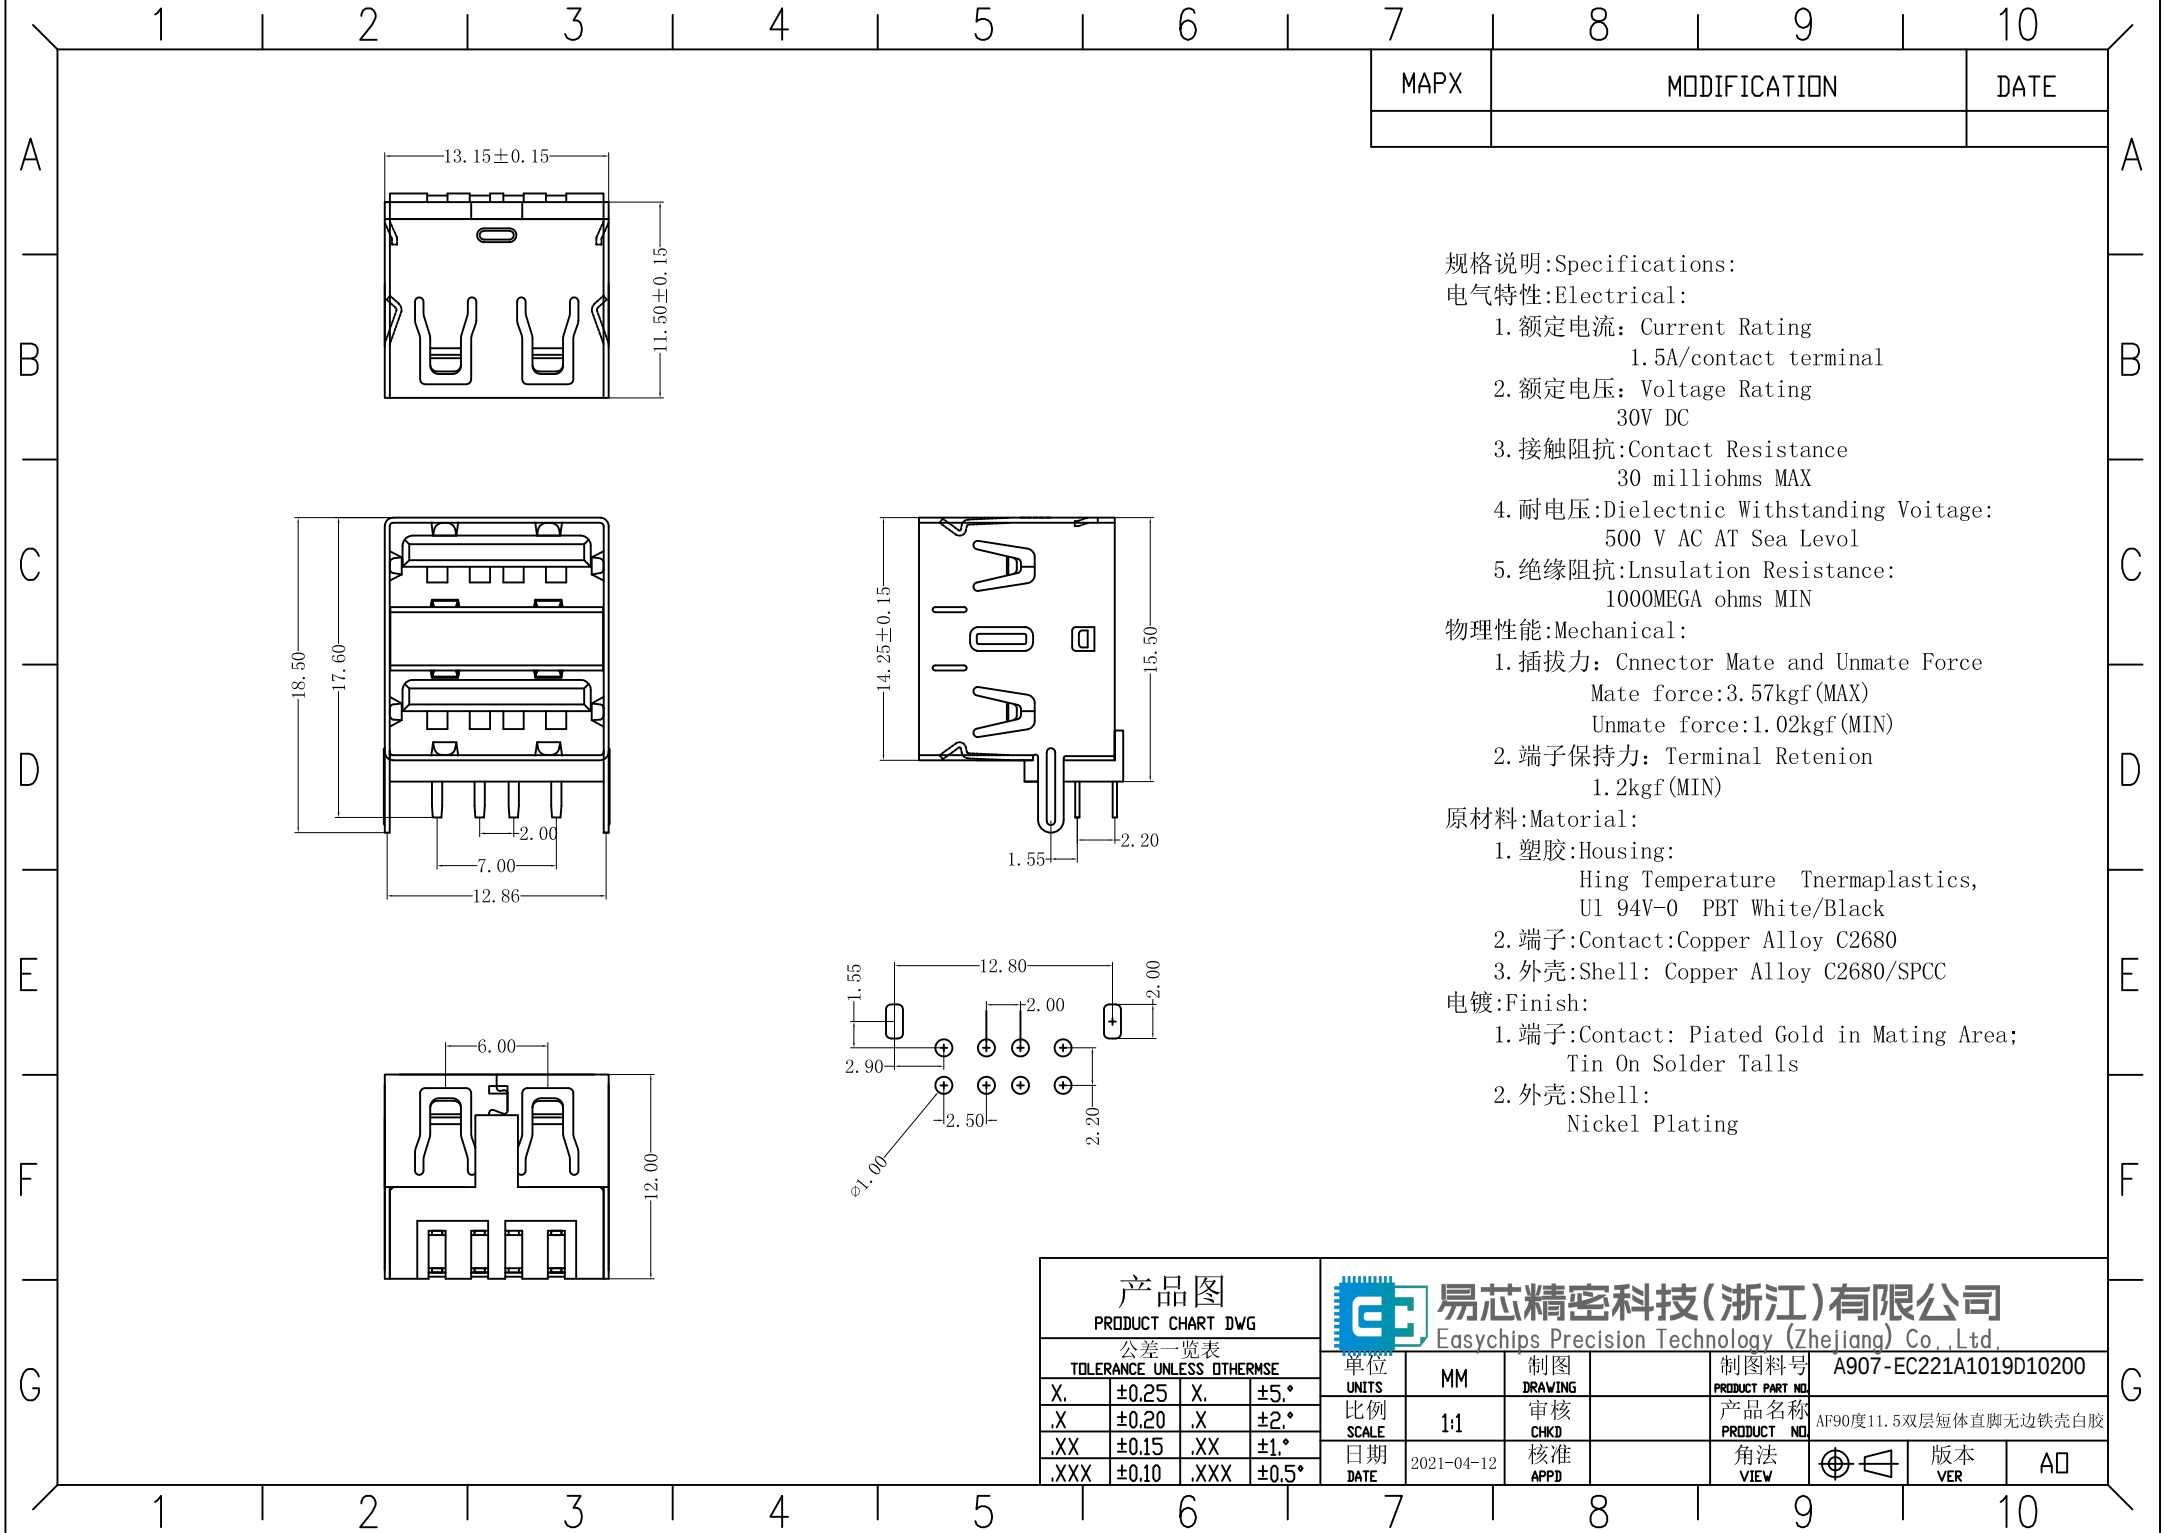

MAPX	MODIFICATION	DATE

- 规格说明:Specifications:
- 电气特性:Electrical:
1. 额定电流: Current Rating
1.5A/contact terminal
 2. 额定电压: Voltage Rating
30V DC
 3. 接触阻抗:Contact Resistance
30 milliohms MAX
 4. 耐电压:Dielectronic Withstanding Voltage:
500 V AC AT Sea Level
 5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN
- 物理性能:Mechanical:
1. 插拔力: Connector Mate and Unmate Force
Mate force:3.57kgf (MAX)
Unmate force:1.02kgf (MIN)
 2. 端子保持力: Terminal Retention
1.2kgf (MIN)
- 原材料:Material:
1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
Ul 94V-0 PBT White/Black
 2. 端子:Contact:Copper Alloy C2680
 3. 外壳:Shell: Copper Alloy C2680/SPCC
- 电镀:Finish:
1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
 2. 外壳:Shell:
Nickel Plating

产品图 PRODUCT CHART DWG		易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.			
公差一览表 TOLERANCE UNLESS OTHERWISE SPECIFIED		单位 UNITS	MM	制图 DRAWING	制图料号 PRODUCT PART NO.
X.	±0.25	X.	±5.°	比例 SCALE	产品名称 PRODUCT NAME
.X	±0.20	.X	±2.°	审核 CHKD	AF90度11.5双层短体直脚无边铁壳白胶
.XX	±0.15	.XX	±1.°	日期 DATE	角法 VIEW
.XXX	±0.10	.XXX	±0.5.°	2021-04-12	核准 APPD
				版本 VER	AD