
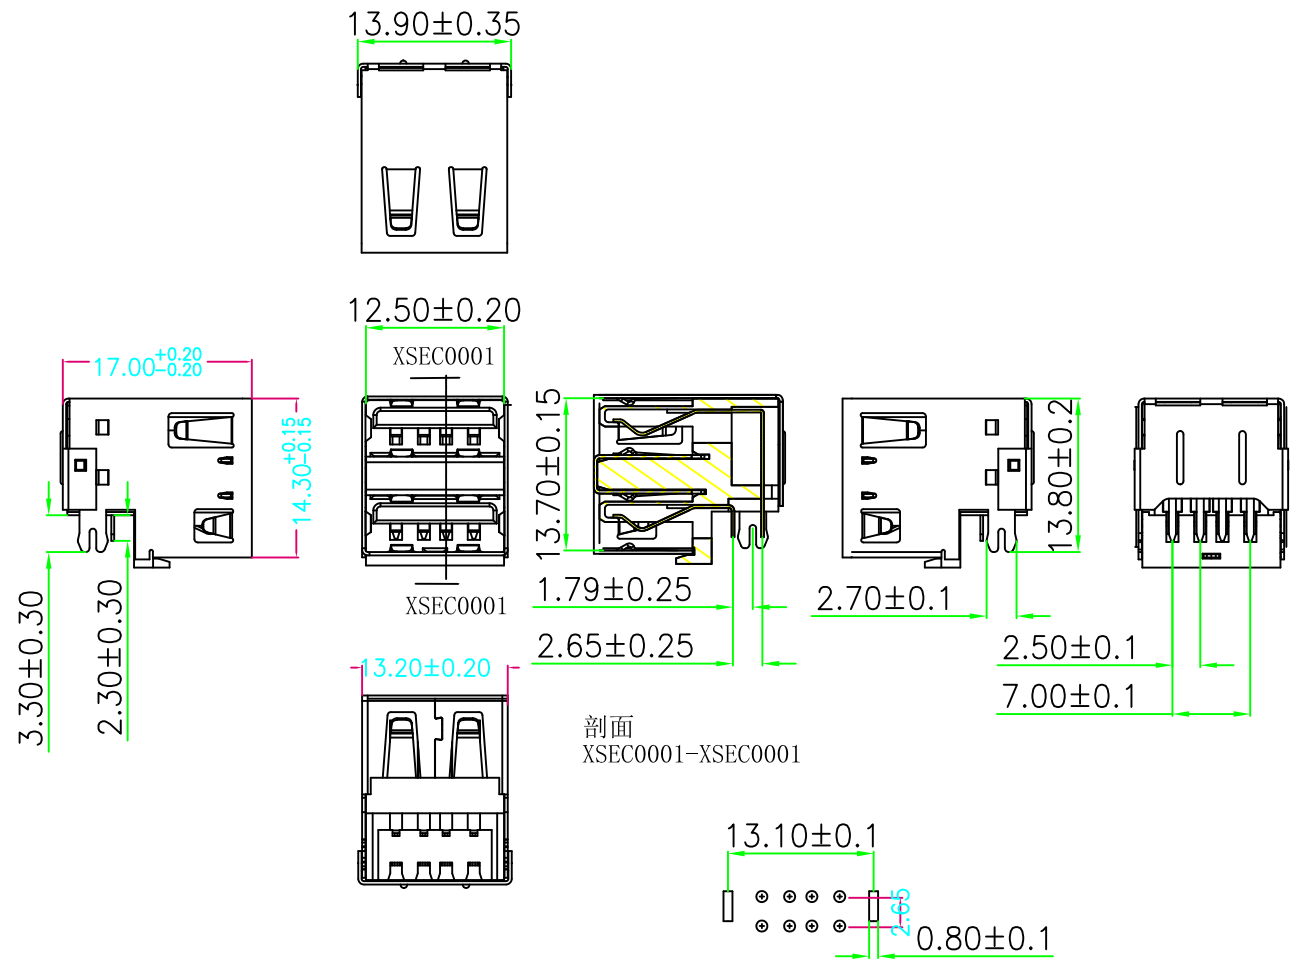


7	8	9	10
MAPX	MODIFICATION		DATE



剖面 XSEC0001-XSEC0001

- 特性 Specifications
- 电气 Electrical:
- 接触阻抗 Contact Resistance: 30 milliohms MAX
 - 耐电压 Dielectric Withstanding Voltage: 500 V AC AT Sea Level
 - 绝缘阻抗 Insulation Resistance: 1000MEGA ohms MIN
- 机构 Mechanical:
- 结合力 Mating Force: 4.0KG NAX 最大4kg
 - 拔出力 Unmating Force: 0.5 KG NIN 最少0.5kg
- 材料 Material:
- 塑胶 Housing: High Temperature Thermoplastic
 - 端子 Contact: Copper Alloy 铜合金
 - 外壳 Shell: Copper Alloy 铁/铜合金
- 电镀 Finish:
- 端子 Contact: Plated Gold In Mating Area, Tin On Solder Tails
接触点镀金, 脚镀锡
 - 外壳 Shell: Nickel Plating 镀镍

<p>产品图 PRODUCT CHART DWG</p>							
<p>公差一览表 TOLERANCE UNLESS OTHERWISE</p>				单位 UNITS	MM	制图 DRAWING	制图料号 PRODUCT PART NO.
X.	±0.35	X.	±5.°	比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NAME
.X	±0.30	.X	±2.°	日期 DATE	2012.04.1	核准 APPD	AF/90度17.0双层沉板鱼叉脚无边铁壳黑胶24H
.XX	±0.25	.XX	±1.°	角法 VIEW			版本 VER
.XXX	±0.10	.XXX	±0.5.°				AD

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作