


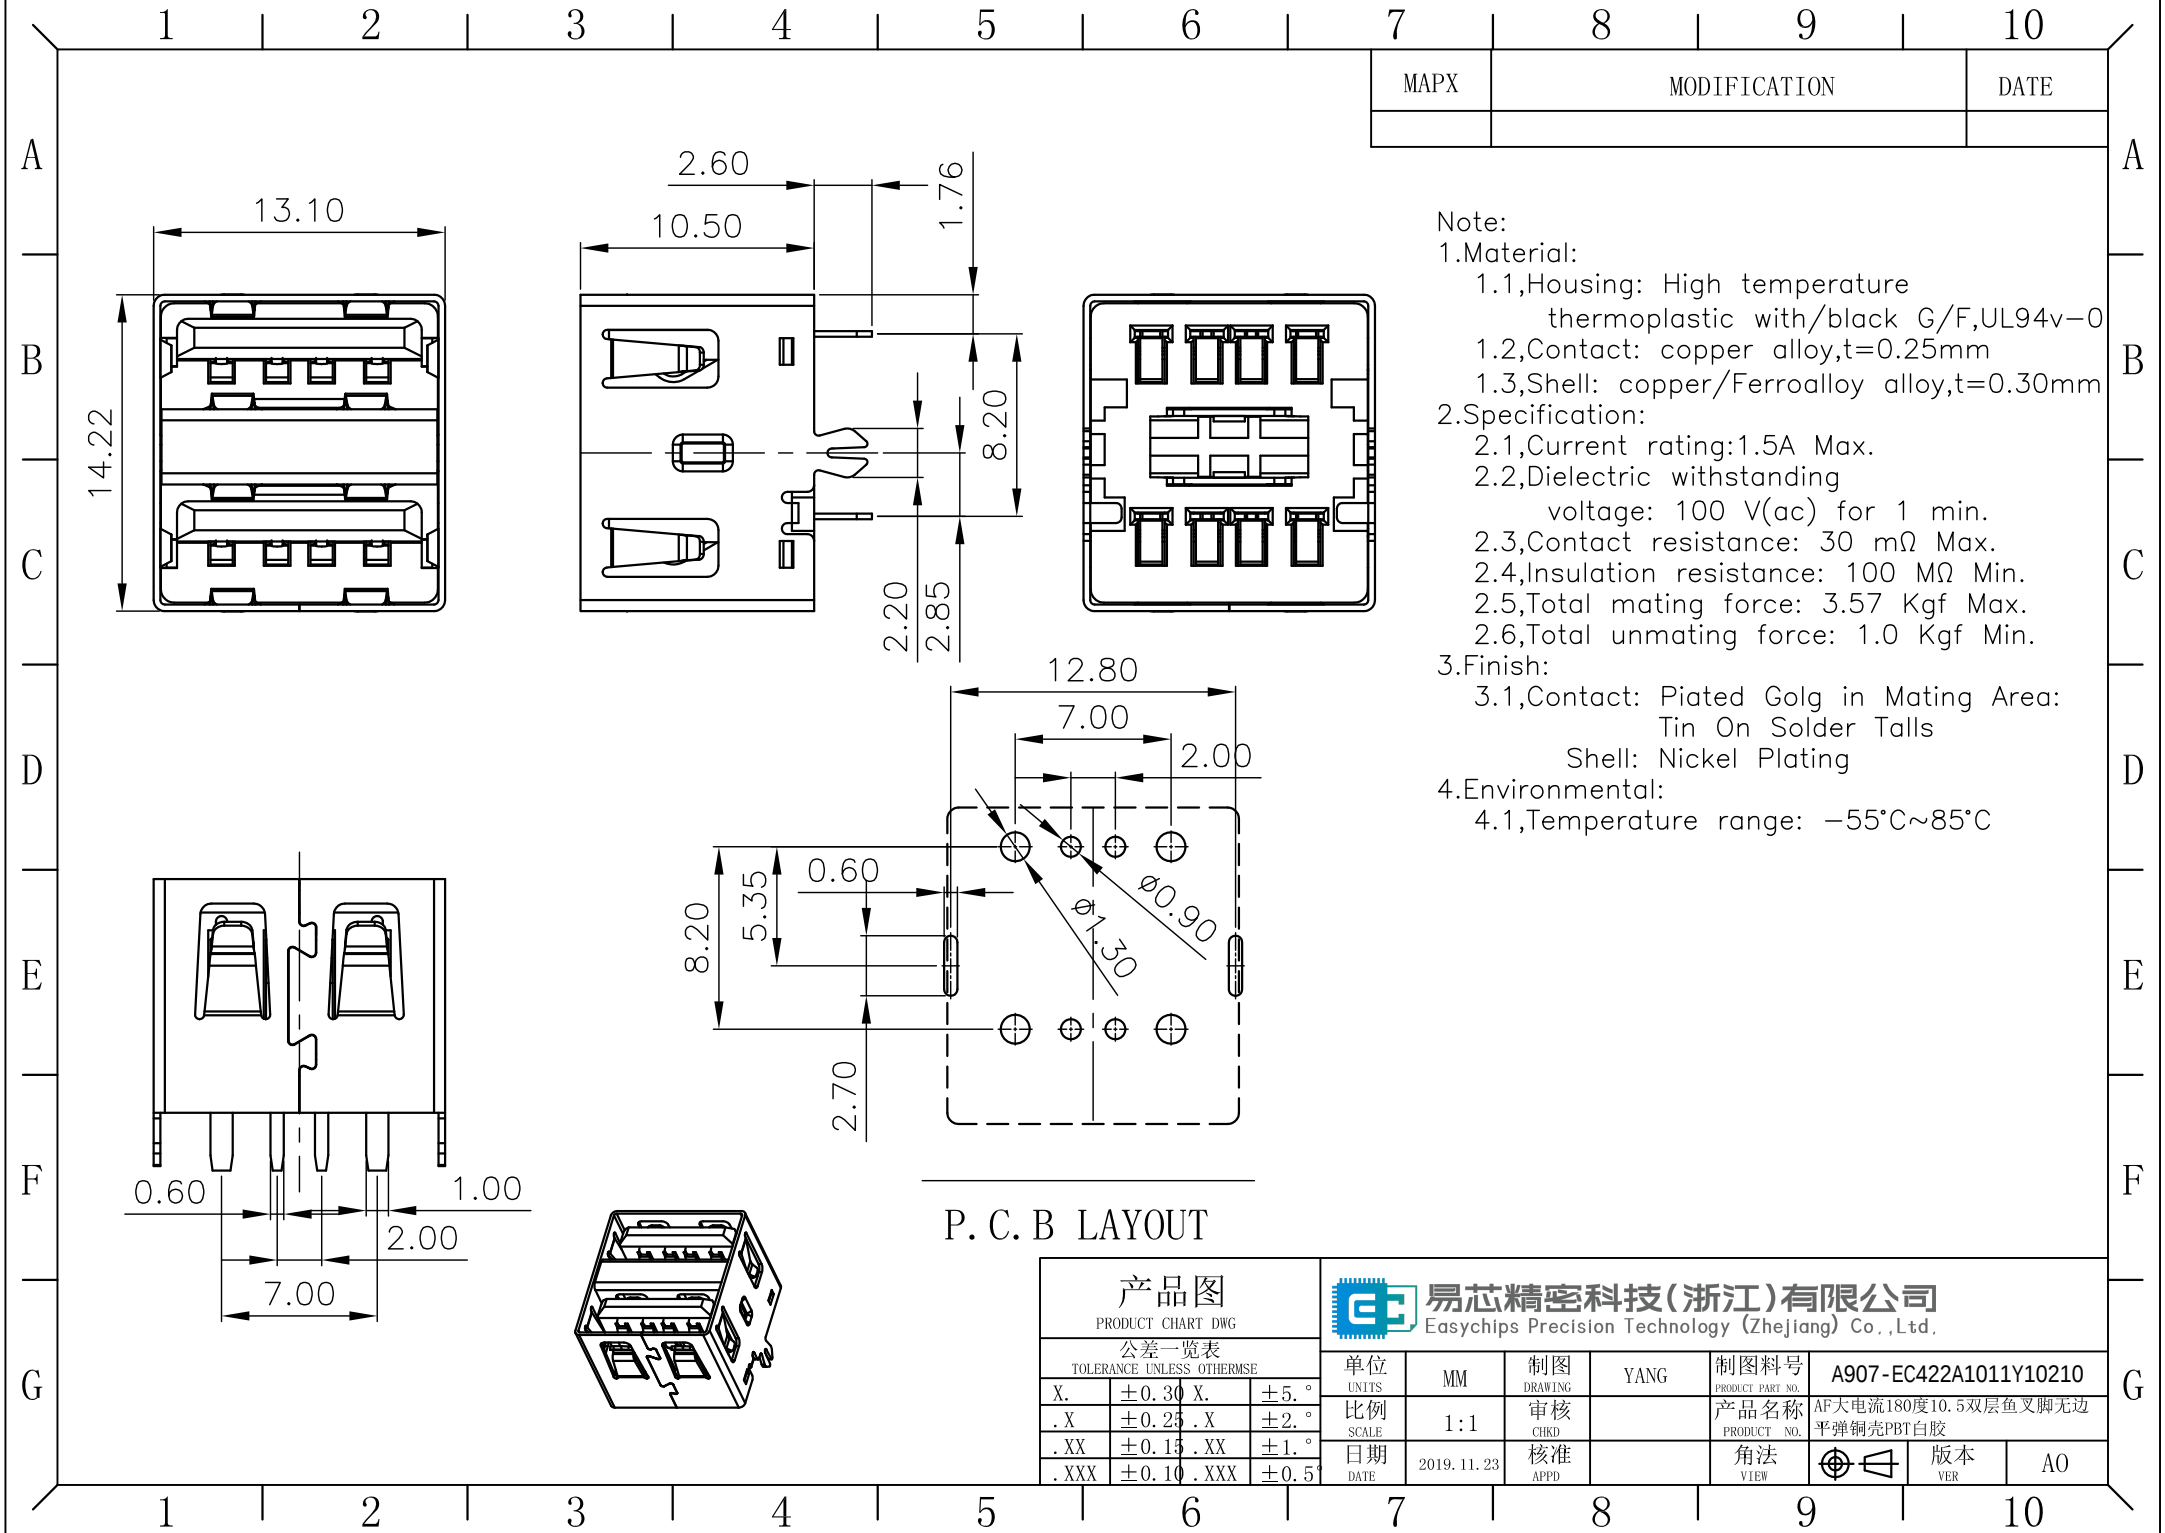

MAPX	MODIFICATION	DATE

- Note:
- 1.Material:
 - 1.1,Housing: High temperature thermoplastic with/black G/F,UL94v-0
 - 1.2,Contact: copper alloy,t=0.25mm
 - 1.3,Shell: copper/Ferroalloy alloy,t=0.30mm
 - 2.Specification:
 - 2.1,Current rating:1.5A Max.
 - 2.2,Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3,Contact resistance: 30 mΩ Max.
 - 2.4,Insulation resistance: 100 MΩ Min.
 - 2.5,Total mating force: 3.57 Kgf Max.
 - 2.6,Total unmating force: 1.0 Kgf Min.
 - 3.Finish:
 - 3.1,Contact: Plated Golg in Mating Area: Tin On Solder Talls
 - Shell: Nickel Plating
 - 4.Environmental:
 - 4.1,Temperature range: -55°C~85°C

P. C. B LAYOUT

产品图 PRODUCT CHART DWG		易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co.,Ltd.					
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	A907-EC422A1011Y10210
X.	±0.30	X.	±5.°	比例 SCALE	1:1	审核 CHKD	产品名称 AF大电流180度10.5双层鱼叉脚无边
.X	±0.25	.X	±2.°	日期 DATE	2019.11.23	核准 APPD	平弹铜壳PBT白胶
.XX	±0.15	.XX	±1.°			角法 VIEW	版本 VER
.XXX	±0.10	.XXX	±0.5°				AO