



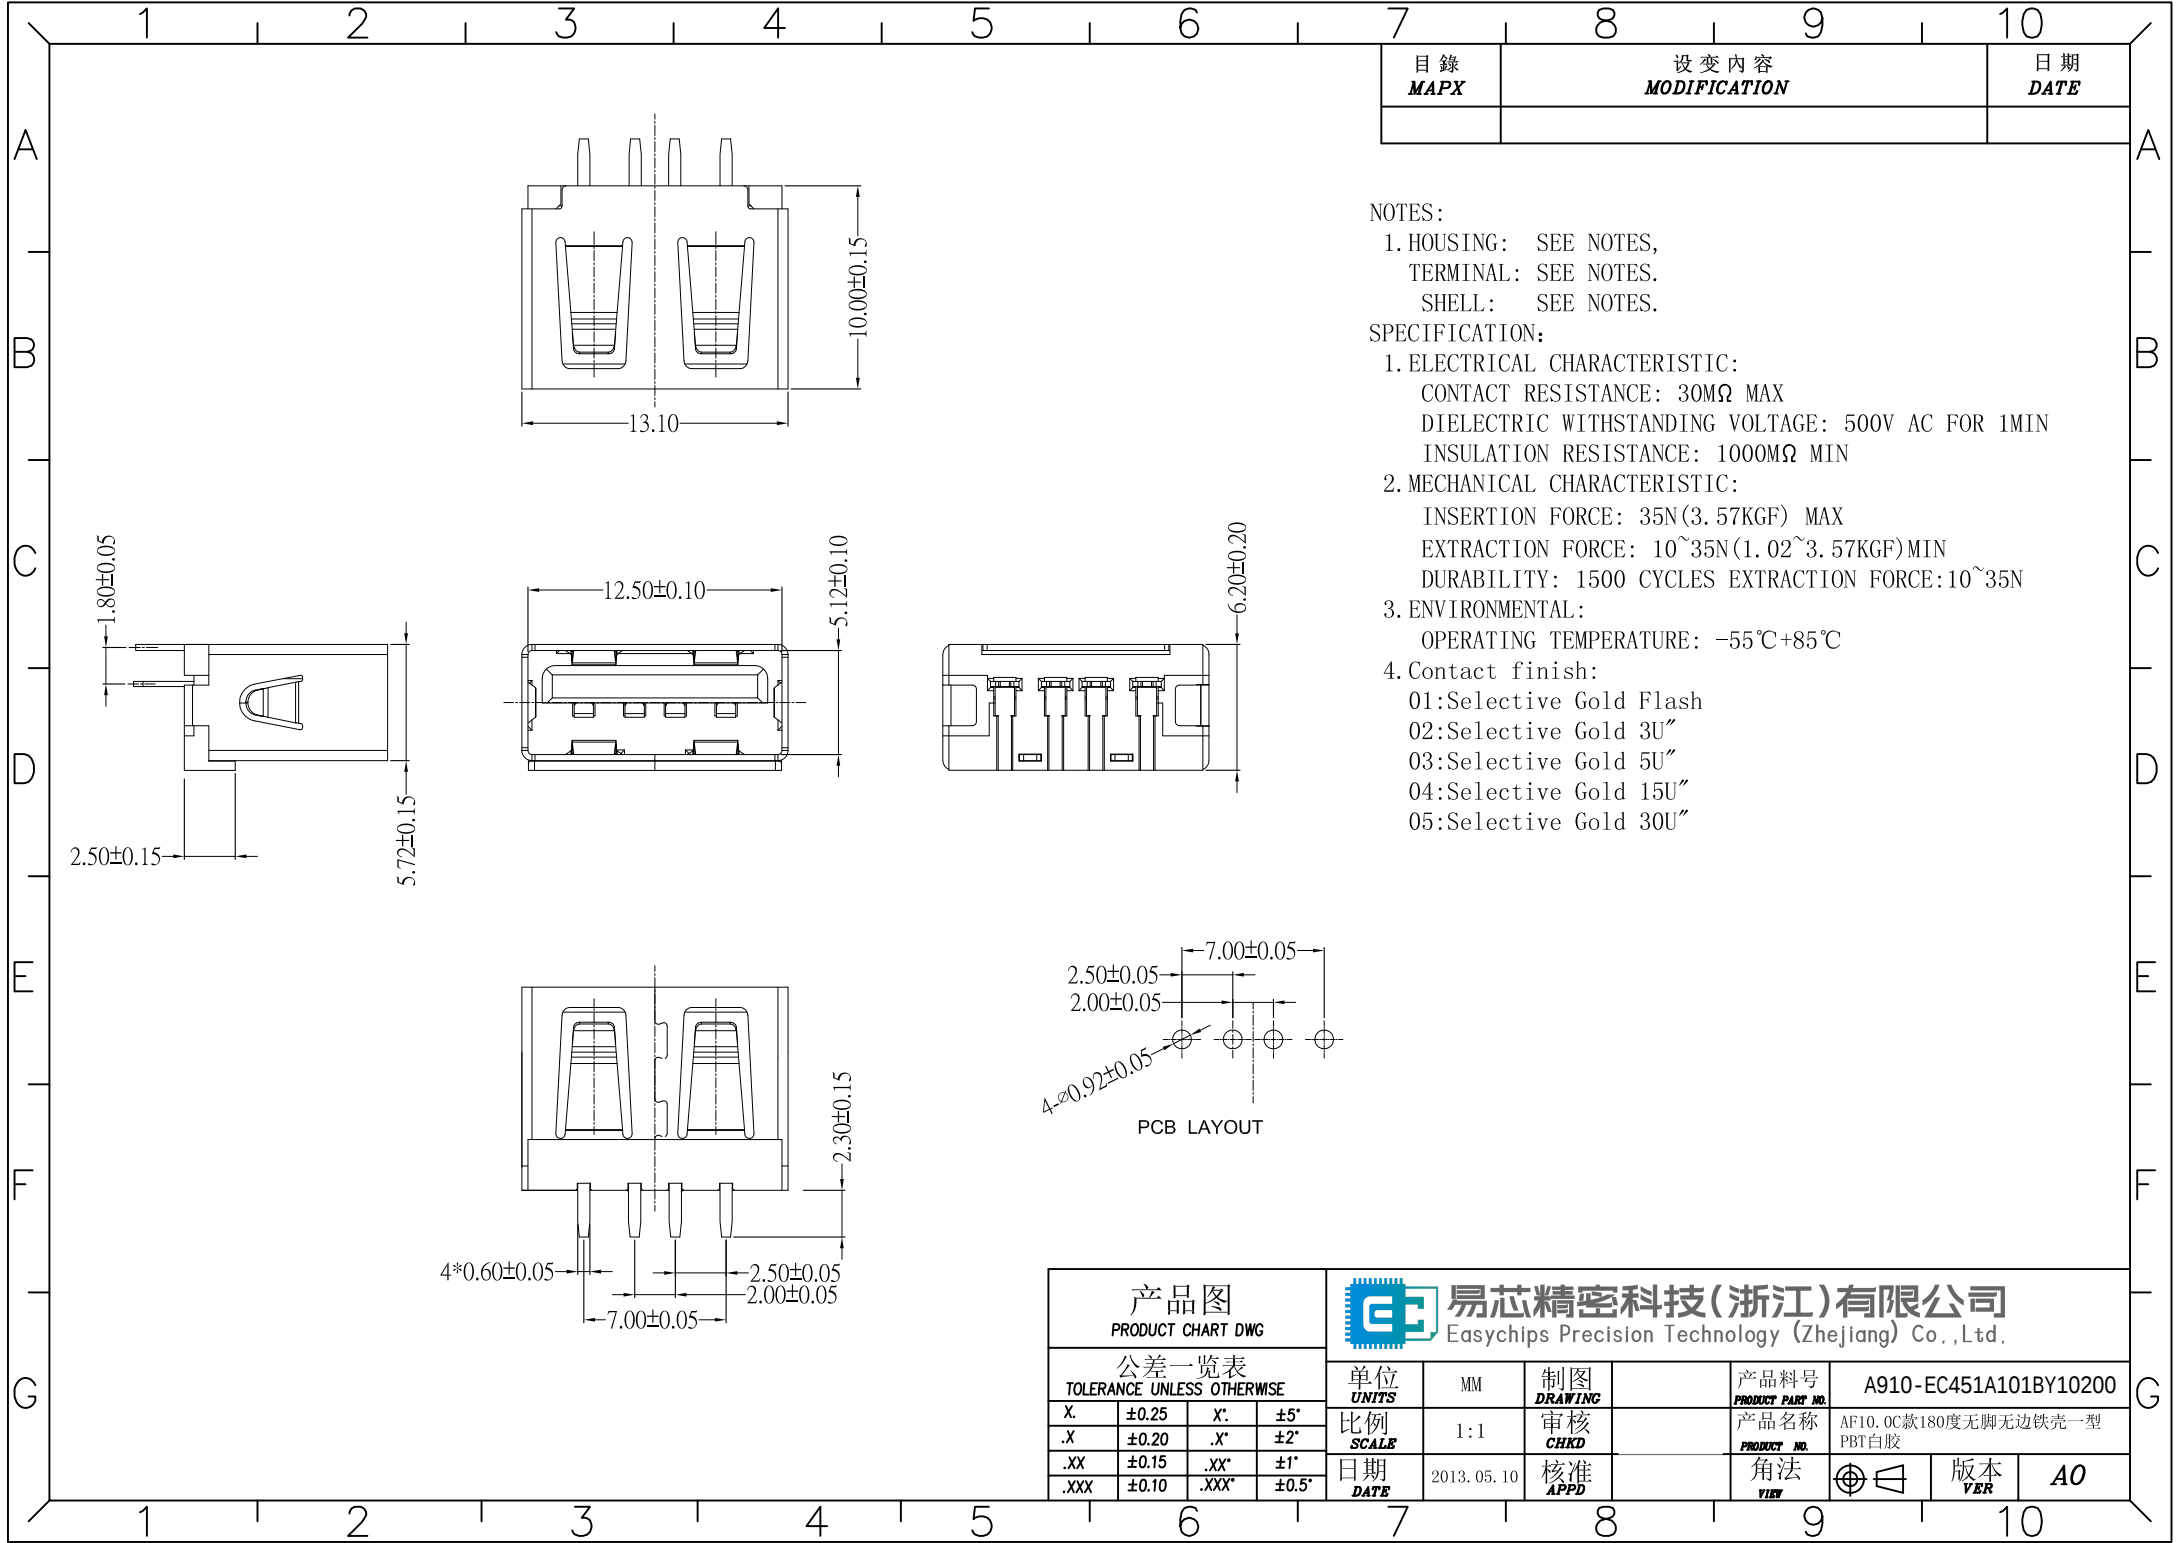

目錄 MAPX	設 變 內 容 MODIFICATION	日 期 DATE

- NOTES:
- 1. HOUSING: SEE NOTES,
 - TERMINAL: SEE NOTES.
 - SHELL: SEE NOTES.
- SPECIFICATION:
- 1. ELECTRICAL CHARACTERISTIC:
 - CONTACT RESISTANCE: 30MΩ MAX
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 - INSULATION RESISTANCE: 1000MΩ MIN
 - 2. MECHANICAL CHARACTERISTIC:
 - INSERTION FORCE: 35N(3.57KGF) MAX
 - EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
 - DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
 - 3. ENVIRONMENTAL:
 - OPERATING TEMPERATURE: -55℃+85℃
 - 4. Contact finish:
 - 01:Selective Gold Flash
 - 02:Selective Gold 3U"
 - 03:Selective Gold 5U"
 - 04:Selective Gold 15U"
 - 05:Selective Gold 30U"



产 品 图 PRODUCT CHART DWG		易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co.,Ltd.						
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	产品料号 PRODUCT PART NO.	A910-EC451A101BY10200
X.	±0.25	X'.	±5°	比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NO.	AF10.0C款180度无脚无边铁壳一型 PBT白胶
.X	±0.20	.X'.	±2°				角法 VIEW	
.XX	±0.15	.XX'.	±1°	日期 DATE	2013. 05. 10	核准 APPD	版本 VER	A0
.XXX	±0.10	.XXX'.	±0.5°					