

RoHS

Autodesk 教育版产品制作





MAPX

MODIFICATION

DRW

DATE

D款, 反向10.0四脚, DIP-*6.20 防水

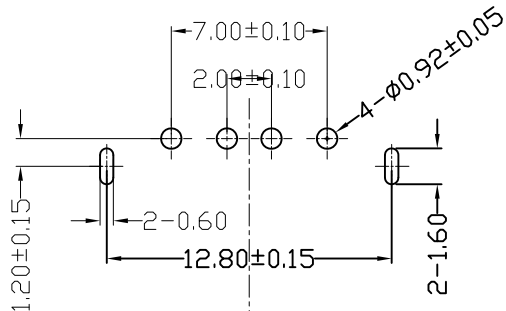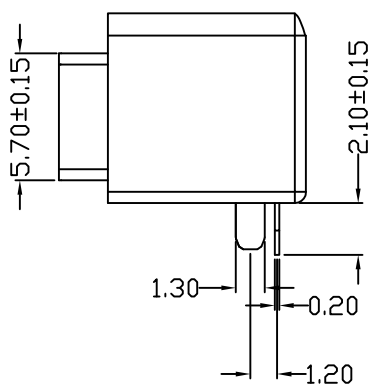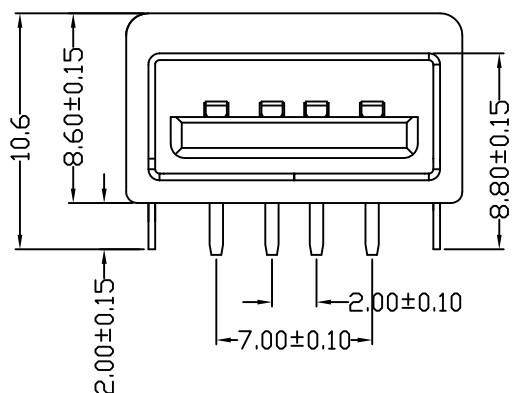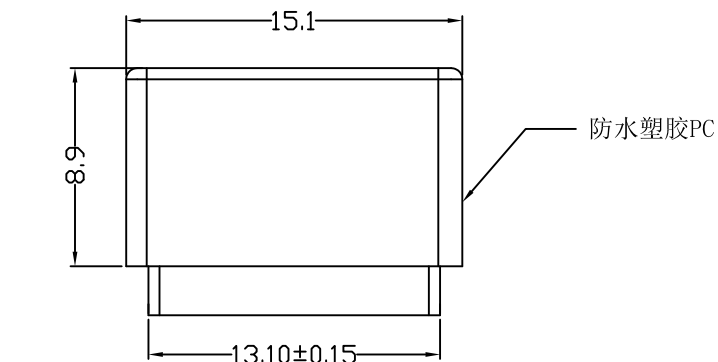

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

NOTES:
1.HOUSING: PBT white, UL94V-0.
TERMINAL: Copper alloy.
SHELL: Copper alloy.
SPECIFICATION:
1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30mΩMAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: (3.57KGF) MAX
EXTRACTION FORCE: (0.30KGF)MIN
DURABILITY: 1500 CYCLES MIN
3000 CYCLES EXTRACTION FORCE:3~35N
3.ENVIRONMENTAL:
OPERATING TEMPERATURE: -55°C+85°C
4.Contact finish:
01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE			
X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°



易芯精密科技(浙江)有限公司
Easychips Precision Technology (Zhejiang) Co., Ltd.

单位 UNITS	MM	制图 DRAWING	制图料号 PRODUCT PART NO.	A911-EC272B1016D10201
比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NAME	AF10.0D款后两直脚无边无弹铜壳反向PBT白胶6.20IP/防水+防水圈
日期 DATE	2016-09-09	核准 APPD	角法 VIEW	版本 VER
				AD