

E 款, 正向10.6四脚, SMT-*6.20

MAPX

MODIFICATION

DATE

NOTES:

- 1.HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.

SPECIFICATION:




- 1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30M Ω MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000M Ω MIN
2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N

3.ENVIRONMENTAL:

OPERATING TEMPERATURE: -55°C+85°C

4.Contact finish:

- 01:Selective Gold Flash
02:Selective Gold 3U"
03:Selective Gold 5U"
04:Selective Gold 15U"
05:Selective Gold 30U"

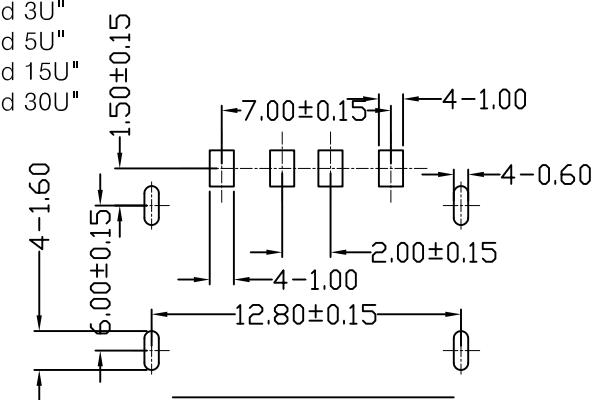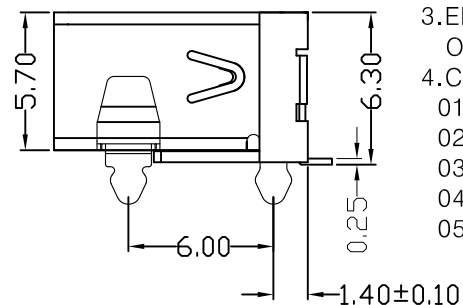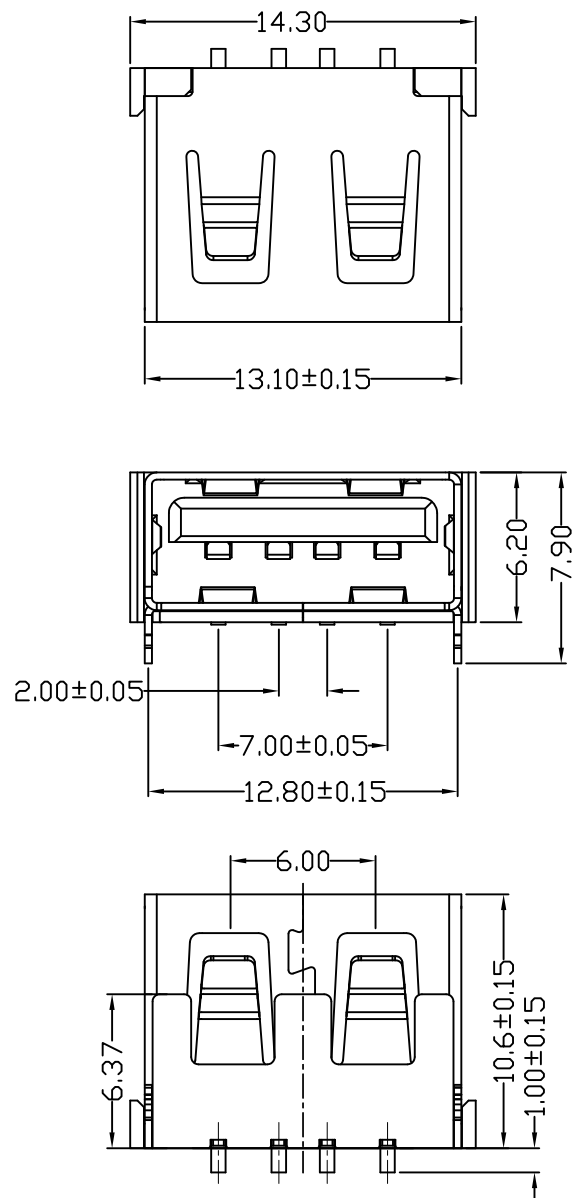

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	± 0.25	X.	$\pm 5^\circ$
.X	± 0.20	.X	$\pm 2^\circ$
.XX	± 0.15	.XX	$\pm 1^\circ$
.XXX	± 0.10	.XXX	$\pm 0.5^\circ$



易芯精密科技(浙江)有限公司

Easychips Precision Technology (Zhejiang) Co., Ltd.

单位 UNITS	MM	制图 DRAWING	Z-Y-B	制图料号 PRODUCT PART NO.	A913-EC361A2021S10200
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NAME	AF10.6E 款四脚无边方弹铁壳LCP黑胶6.2SMT
日期 DATE	2014.03.24	核准 APPD		角法 VIEW	版本 VER
					AD