


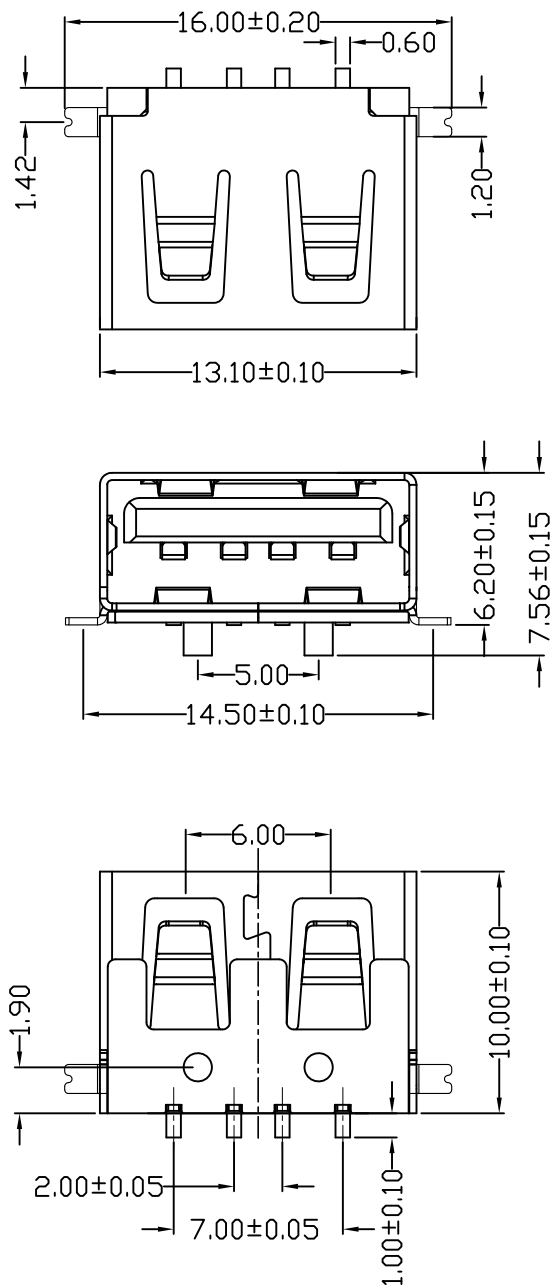

NOTES:

- 1.HOUSING: SEE NOTES, UL94V-0 .
- TERMINAL: SEE NOTES.
- SHELL: SEE NOTES.

SPECIFICATION:


- 1.ELECTRICAL CHARACTERISTIC:
 - CONTACT RESISTANCE: $30M\Omega$ MAX
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
 - INSULATION RESISTANCE: $1000M\Omega$ MIN
- 2.MECHANICAL CHARACTERISTIC:
 - INSERTION FORCE: 35N(3.57KGF) MAX
 - EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
 - DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
 - 5000 CYCLES MIN
 - 5000 CYCLES EXTRACTION FORCE:3~35N

3.ENVIRONMENTAL:

OPERATING TEMPERATURE: $-55^{\circ}\text{C}+85^{\circ}\text{C}$

4.Contact finish:

- 01:Selective Gold Flash
- 02:Selective Gold 3U"
- 03:Selective Gold 5U"
- 04:Selective Gold 15U"
- 05:Selective Gold 30U"

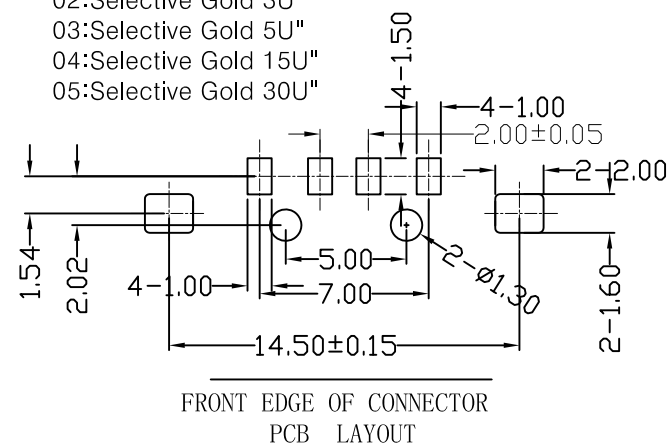

产品图				易芯精密科技(浙江)有限公司					
PRODUCT CHART DWG				Easychips Precision Technology (Zhejiang) Co., Ltd.					
公差一览表				单位	MM	制图	Z-Y-B	制图料号	A915-EC421A2026S10101
TOLERANCE UNLESS OTHERWISE				UNITS		DRAWING		PRODUCT PART NO.	
X.	± 0.25	X.	$\pm 5^{\circ}$	比例	1:1	审核		产品名称	AF10.0短体后两脚全贴无边方弹铁壳
.X	± 0.20	.X	$\pm 2^{\circ}$	SCALE		CHKD		PRODUCT NO.	LCP黑胶6.2有柱
.XX	± 0.15	.XX	$\pm 1^{\circ}$	日期	2013.04.24	核准		角法	
.XXX	± 0.10	.XXX	$\pm 0.5^{\circ}$	DATE		APPD		VIEW	
								版本	AD
								VER	