
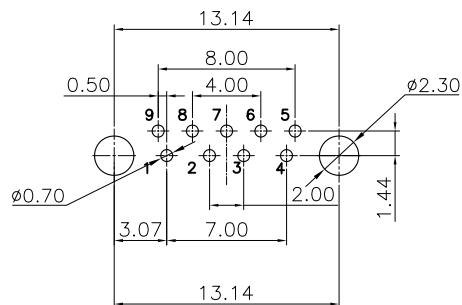


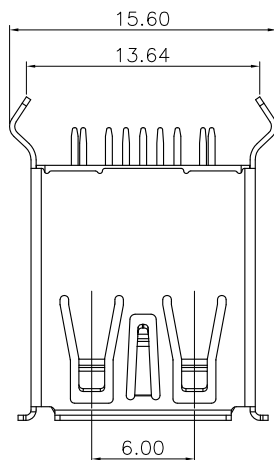

TOLERANCE: ± 0.05 ,
RECOMMENDED PCB LAYOUT
(TOP VIEW)





NOTES:

1.MATERIAL:

- 1.1 HOUSING: HIGH TEMPERATURE THERAL PLASTIC.
- 1.2 SPRING CONTACT: COPPER ALLOY.
- 1.3 FLAT CONTACT;COPPER ALLOY
- 1.4 SHELL :COPPER ALLOY.
- 1.5 COVER:HIGH TEMPERATURE THERAL PLASTIC.

2.FINISH:

- 2.1 CONTACT: (SEE P/N.),[50 μ] MIN. NICKEL UNDERPLATING OVER ALL.
- 2.2 SHELL: [50 μ] MIN.SOLDERABILITY NICKEL UNDERPLATING OVER ALL.

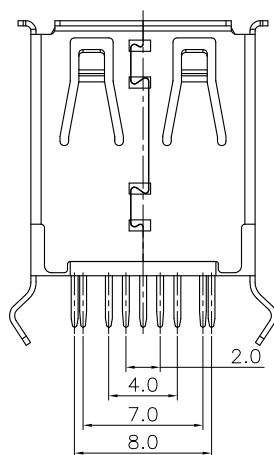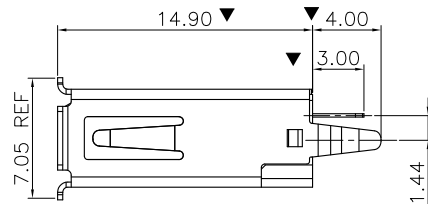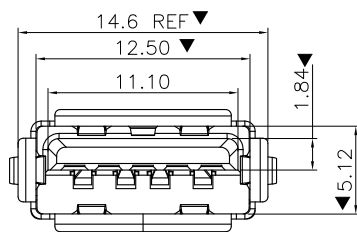

PIN NO.	PIN 1	PIN 2	PIN 3	PIN 4
SLGNAL NAME	V BUS	D-	D+	GND
REMARK	USB 2.0 CONTACT PINS			

PIN NO.	PIN 5	PIN 6	PIN 7	PIN 8	PIN 9
SLGNAL NAME	STDA_SSRX-	STDA_SSRX+	GND_DRAIN	STDA_SSTX-	STDA_SSTX+
REMARK	USB 3.0 CONTACT PINS				

产品图 PRODUCT CHART DWG		易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.			
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	制图料号 PRODUCT PART NO.
X.	± 0.25	X.	$\pm 5^\circ$	比例 SCALE	产品名称 PRODUCT NO.
.X	± 0.20	.X	$\pm 2^\circ$	日期 DATE	角法 VIEW
.XX	± 0.15	.XX	$\pm 1^\circ$	日期 DATE	版本 VER
.XXX	± 0.10	.XXX	$\pm 0.5^\circ$	日期 DATE	版本 VER

A916-EC152A2058Y20200

AF3.0 180度15.0弯脚有边铜壳LCP蓝胶

角法
VIEW

版本
VER

AO