


目錄 MAPX	设变内容 MODIFICATION	日期 DATE

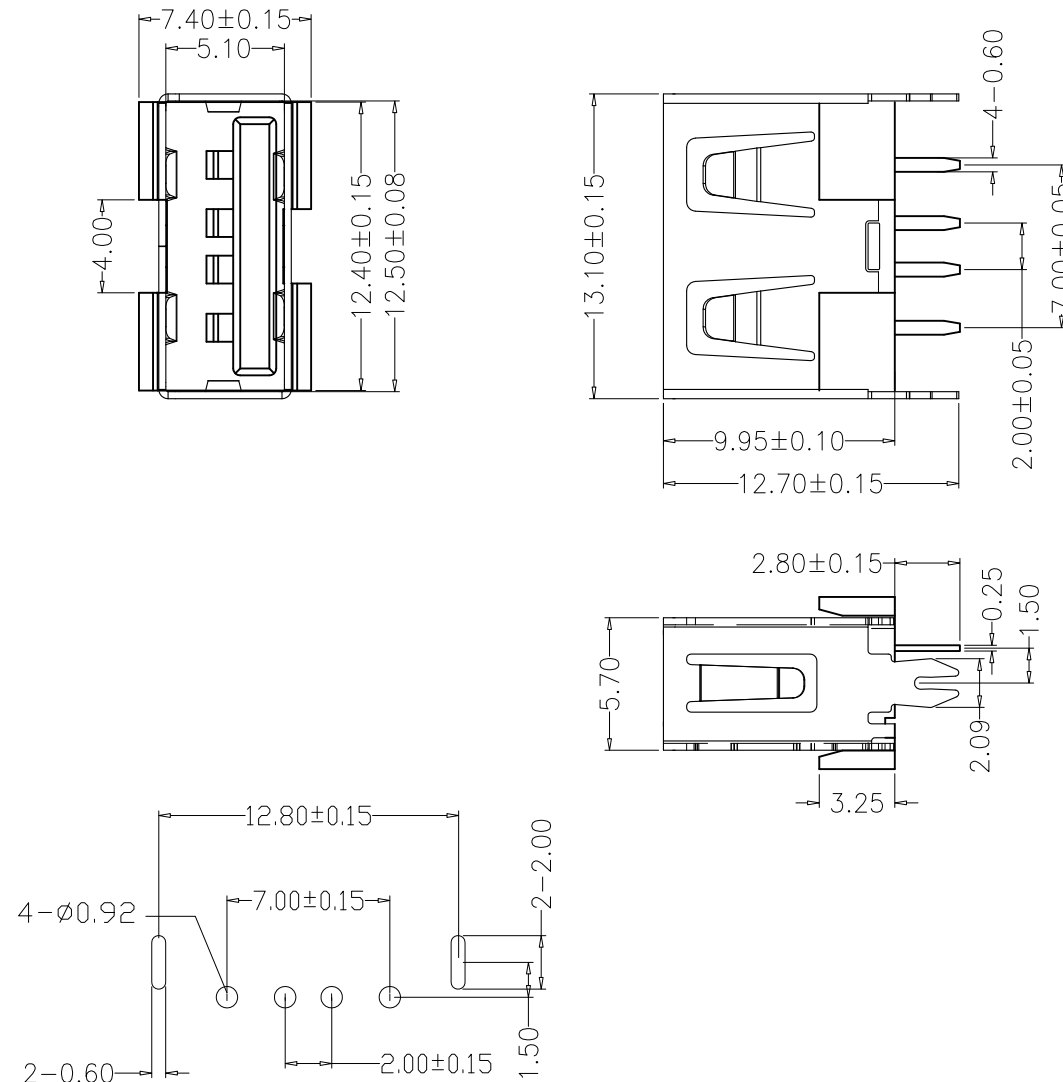

NOTES:

Housing: Thermoplastics,UL94V-0

Contact: Copper Alloy

Shell: Copper Alloy/Steel

Voltage Current Rating:1.5 AMP. 30V AC

Insulation Resistance:1000MΩ Min.

Contact Resistance: 30 MΩ Max.

Dielectric Withstanding Voltage:500W AC

Temperature Range:-35°C to +85°C

Insulator color: Black/White

Plastic material:PBT/LCP/Others

Shell finish:Nickel plated/Tin-Lead plated

Mechanical:

Mating Force:3.5KG MAX

Unmating Force:0.7 KG MIN.

Contact finish:

01:Selective Gold Flash

02:Selective Gold 3U"

03:Selective Gold 5U"

04:Selective Gold 15U"

05:Selective Gold 30U"

产品图 PRODUCT CHART DWG				易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.			
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	Z-Y-B
X	±0.25	X'	±5'	比例 SCALE	1:1	审核 CHKD	产品料号 PRODUCT PART NO.
.X	±0.20	.X'	±2'	日期 DATE	2013. 05. 10	核准 APPD	产品名称 PRODUCT NO.
.XX	±0.15	.XX'	±1'				角法 VIEW
.XXX	±0.10	.XXX'	±0.5'				版本 VER
							40

AF10. 0短体180度鱼叉脚无边铁壳PBT白胶