
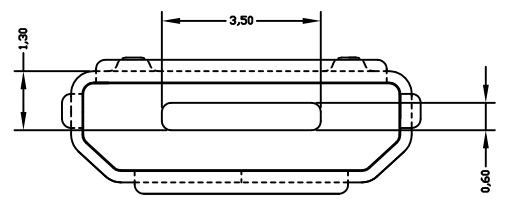


MAPX	MODIFICATION	DATE

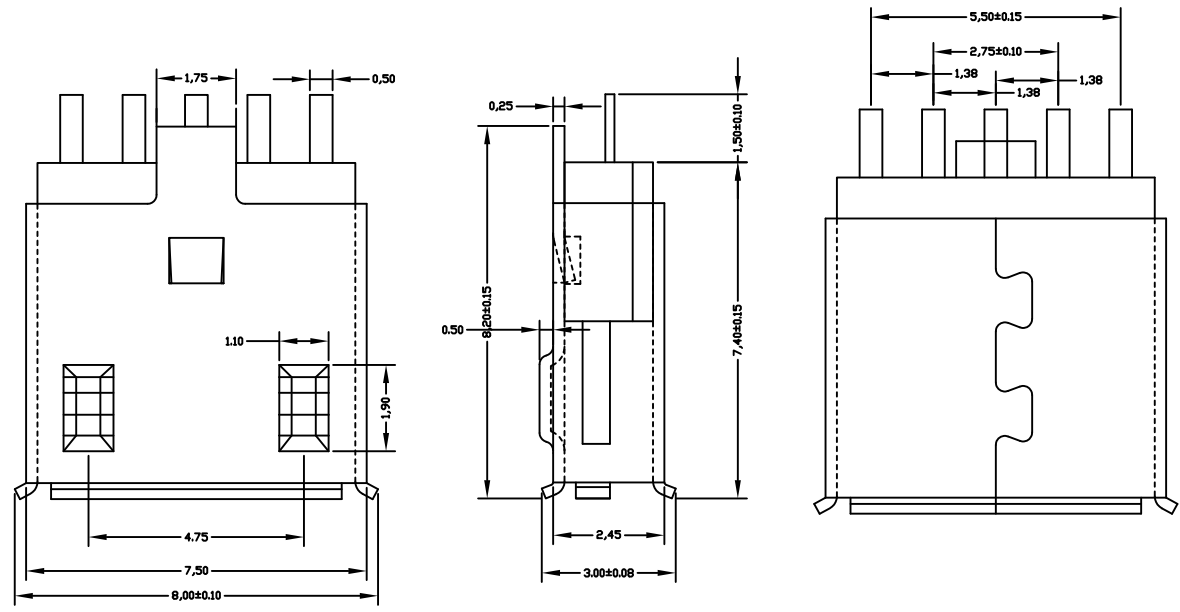

备注:

1. 产品规格:

- 1-1. 插入力: 35N MAX.
- 1-2. 拔出力: 10N MIN. INITIAL 8-20N AFTER 3000 CYCLES
- 1-3. 额定电流: 1.0A
- 1-4. 额定电压: 30V
- 1-5. 耐久性: 3000 CYCLES MIN.
- 1-6. 耐电压: 100V AC MIN.
- 1-7. 接触阻抗:  $30m\Omega$  MAX. INITIAL;  $40m\Omega$  MAX AFTER 3000 CYCLES
- 1-8. 绝缘电阻:  $100M\Omega$  MIN
- 1-9. 工作温度:  $-30^{\circ}$  TO  $+80^{\circ}$

2. 材质:

- 2.1 胶芯: LCP UL94V-0
- 2.2 端子: C2680R-H, 镍底, 镀金  $1\mu$ "
- 2.3 外壳: 304 不锈钢, 表面雾锡  $80\mu$ "

3. 所用材质须符合RoHS要求

<p>产品图 PRODUCT CHART DWG</p> <p>公差一览表 TOLERANCE UNLESS OTHERWISE</p> <table border="1"> <tr> <td>X.</td> <td><math>\pm 0.35</math></td> <td>X.</td> <td><math>\pm 5^{\circ}</math></td> </tr> <tr> <td>.X</td> <td><math>\pm 0.30</math></td> <td>.XX</td> <td><math>\pm 2^{\circ}</math></td> </tr> <tr> <td>.XX</td> <td><math>\pm 0.20</math></td> <td>.XXX</td> <td><math>\pm 1^{\circ}</math></td> </tr> <tr> <td>.XXX</td> <td><math>\pm 0.10</math></td> <td>.XXX</td> <td><math>\pm 0.5^{\circ}</math></td> </tr> </table>		X.	$\pm 0.35$	X.	$\pm 5^{\circ}$	.X	$\pm 0.30$	.XX	$\pm 2^{\circ}$	.XX	$\pm 0.20$	.XXX	$\pm 1^{\circ}$	.XXX	$\pm 0.10$	.XXX	$\pm 0.5^{\circ}$	<p>易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.</p>	
X.	$\pm 0.35$	X.	$\pm 5^{\circ}$																
.X	$\pm 0.30$	.XX	$\pm 2^{\circ}$																
.XX	$\pm 0.20$	.XXX	$\pm 1^{\circ}$																
.XXX	$\pm 0.10$	.XXX	$\pm 0.5^{\circ}$																
单位 UNITS	MM	制图 DRAWING	制图料号 PRODUCT PART NO.	B920-EC154A2021B10100															
比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NAME	MICRO 5P-F0.6有边无孔夹板LCP黑胶															
日期 DATE	2016-04-09	核准 APPD	角法 VIEW	版本 VER															
			AD																