



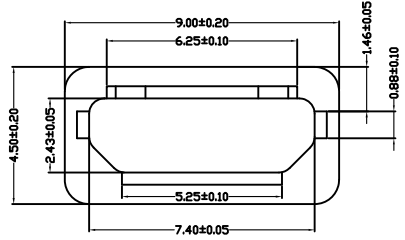


目錄 MAPX	設變內容 MODIFICATION	日期 DATE

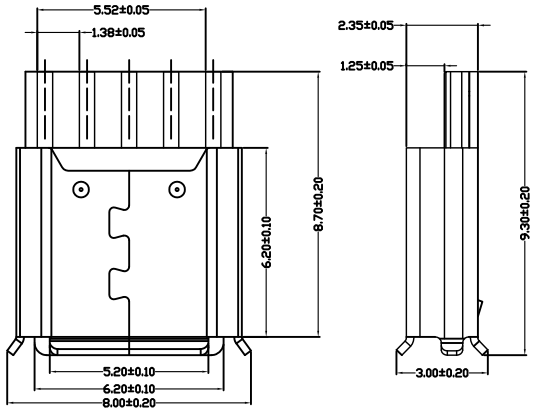

护套备注:
 1. 材质: PBT, UL-94V-0
 2. 没有标示的R角为0.10MM
 3. 毛边最大为: 0.03MM

- 备注:
- 产品规格:
 - 1-1. 插入力: 35N MAX.
 - 1-2. 拔出力: 10N MIN. INITIAL 8-20N AFTER 3000 CYCLES
 - 1-3. 额定电流: 1.0A
 - 1-4. 额定电压: 30V
 - 1-5. 耐久性: 3000 CYCLES MIN.
 - 1-6. 耐电压: 100V AC MIN.
 - 1-7. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX AFTER 3000 CYCLES
 - 1-8. 绝缘电阻: 100MΩ MIN
 - 1-9. 工作温度: -30° TO +80°
 - 材质:
 - 2.1 胶芯: LCP UL94V-0
 - 2.2 端子: C2680R-H, 镍底, 镀金1μ"
 - 2.3 外壳: C2680R-H, 表面镀镍100μ
 - 所用材质须符合RoHS要求
 - 重点尺寸标识"▲"符号

产品图 PRODUCT CHART DWG				 Easychips Precision Technology (Zhejiang) Co., Ltd.					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	产品料号 PRODUCT PART NO.	B920-EC154A2021W10101	
X.	±0.25	X'.	±5°	比例 SCALE	1:1	审核 CHKD	产品名称 PRODUCT NO.	MICRO 5P-F B型焊线式有边不锈钢LCP	
.X	±0.20	.X'.	±2°					黑胶+护套	
.XX	±0.15	.XX'.	±1°	日期 DATE	2021-04-15	核准 APPD	角法 VIEW		版本 VER
.XXX	±0.10	.XXX'.	±0.5°						A0