
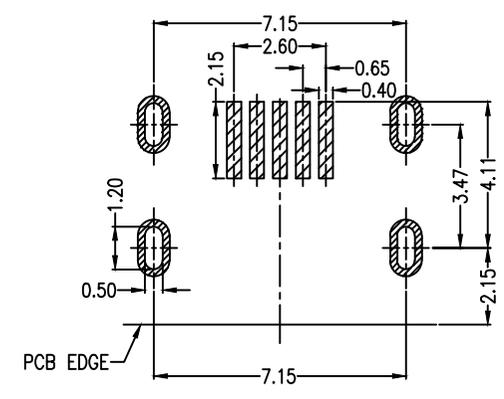
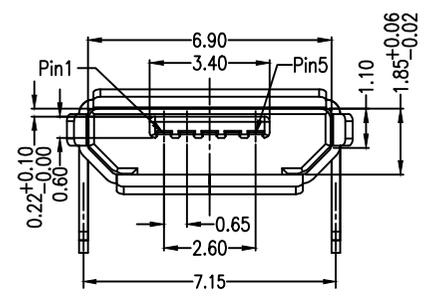

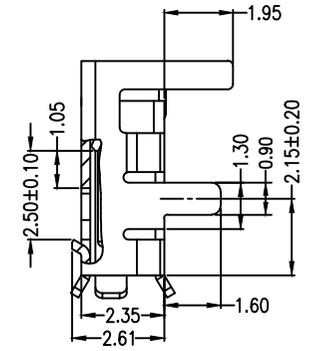
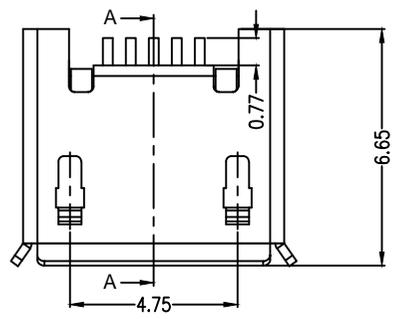



| | | |
|------|--------------|------|
| MAPX | MODIFICATION | DATE |
| | | |

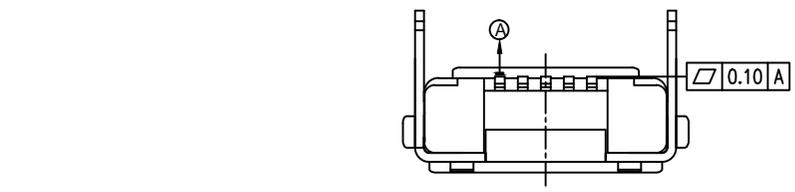

RECOMMENDED PCB LAYOUT
PCB图仅供参考

- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f,UL94v-0
 - Contact: copper alloy,t=0.20mm
 - Shell: copper alloy,t=0.25mm
 - Specification:
 - Current rating:1.5PIN 1.8A Max/2,3,4PIN 1A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.
 - Temperature range: -30°C~80°C

| | | | | | |
|-------------------------------------|-------|--|-------|---------------|-------------------------------|
| 产品图 PRODUCT CHART DWG | | 易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd. | | | |
| 公差一览表 TOLERANCE UNLESS OTHERWISE | | 单位 UNITS | MM | 制图 DRAWING | 制图料号 PRODUCT PART NO. |
| X. | ±0.35 | X. | ±5.° | | B920-ECA52A2021S10100 |
| .X | ±0.30 | .X | ±2.° | | 产品名称 MMICRO 5S B型有边7.2四脚插板 |
| .XX | ±0.25 | .XX | ±1.° | | 无柱前1.6后1.95端子加长0.75 |
| .XXX | ±0.15 | .XXX | ±0.5° | | 角法 VIEW |
| | | | | | 版本 VER |
| | | | | | 核准 APPD |
| | | | | | 日期 DATE |
| | | | | | |
| | | | | | |