
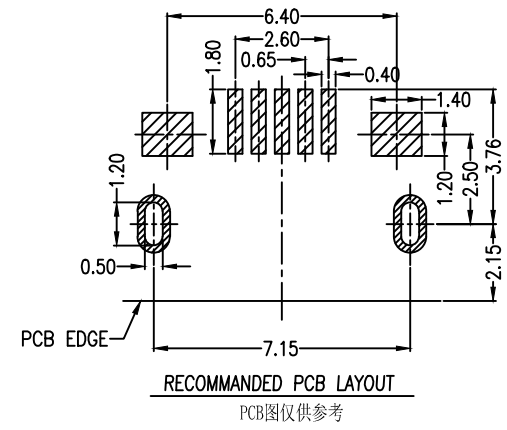
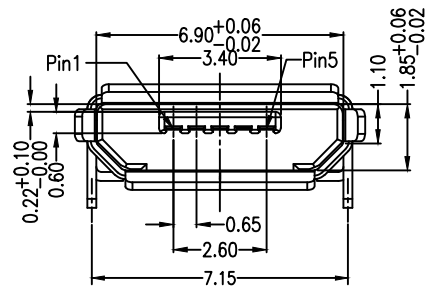

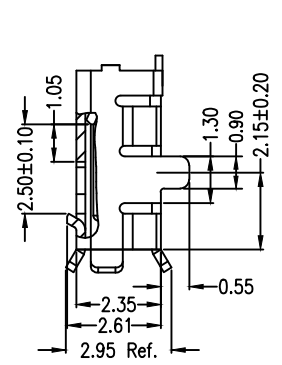
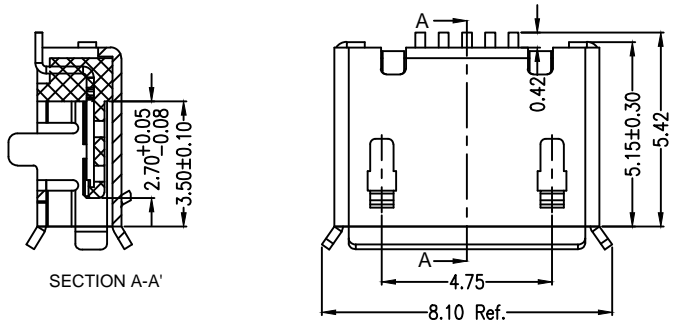


| | | |
|------|--------------|------|
| MAPX | MODIFICATION | DATE |
| | | |

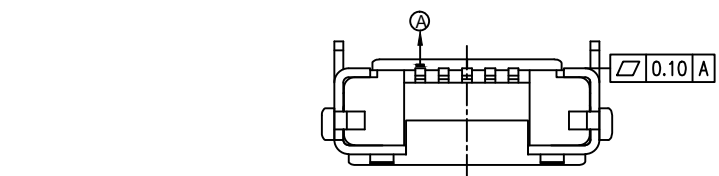

- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f.,UL94v-0
 - Contact: copper alloy,t=0.20mm
 - Shell: copper alloy,t=0.25mm
 - Specification:
 - Current rating:1.5PIN 1.8A Max/2,3,4PIN 1A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.
 - Temperature range: -30°C~80°C

| | | | | | | |
|--|------------|---|------------|---------------|--------------------------|--|
| 产品图 PRODUCT CHART DWG | | 易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co.,Ltd. | | | | |
| 公差一览表 TOLERANCE UNLESS OTHERWISE | | 单位 UNITS | MM | 制图 DRAWING | 制料料号 PRODUCT PART NO. | |
| X. | ±0.30 | X. | ±5.° | 审核 CHKD | B920-ECA52A2021S10106 | |
| .X | ±0.25 | .X | ±2.° | | 产品名称 PRODUCT NO. | MICRO/5P-F 两脚DIP7.2有边无 柱加焊脚端子0.4SMT |
| .XX | ±0.15 | .XX | ±1.° | | 角法 VIEW | |
| .XXX | ±0.10 | .XXX | ±0.5° | | 核准 APPD | 版本 VER |
| 日期 DATE | 2019.11.23 | | 日期 DATE | 日期 DATE | 日期 DATE | |