



MAPX	MODIFICATION	DATE



- Note:
- Material:
 - Housing: High temperature thermoplastic
 - Contact: copper alloy, t=0.20mm
 - Shell: SUS304, t=0.30mm
 - cover: High temperature thermoplastic
 - out Shell: SUS304 T=0.25
 - Ring: SILICON
 - Epoxy: Epoxy
 - Specification:
 - Current rating: 1,5PIN 2.0A Max/2,3,4PIN 1A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.
 - Temperature range: -30°C~80°C
 - Waterproof: IPX 7.

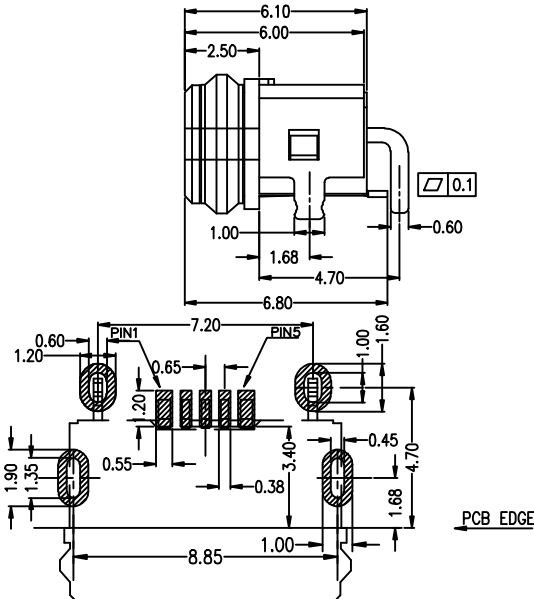

产品图 PRODUCT CHART DWG 公差一览表 TOLERANCE UNLESS OTHERWISE		易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.		制图料号 PRODUCT PART NO. B920-ECA64A2051S101A2	
单位 UNITS X. ±0.30 X. ±5.° .X ±0.25 .X ±2.° .XX ±0.15 .XX ±1.° .XXX ±0.10 .XXX ±0.5°	比例 SCALE 1:1	日期 DATE 2019.11.23	制图 DRAWING 审核 CHECK 核准 APPD	产品名称 PRODUCT NO. MICRO 6PIN 防水1A 1圈屏蔽端子SMT插座	角法 VIEW
			版本 VER A0		