
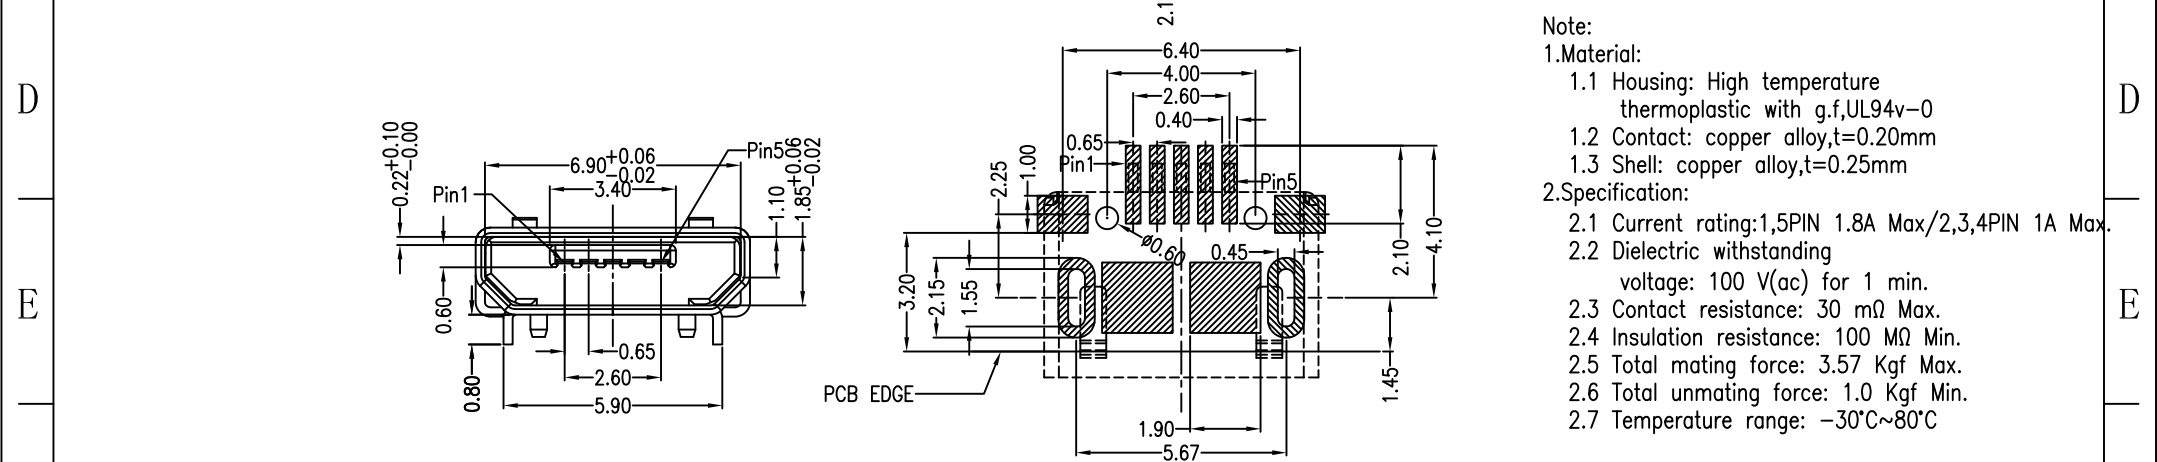


MAPX	MODIFICATION	DATE
------	--------------	------

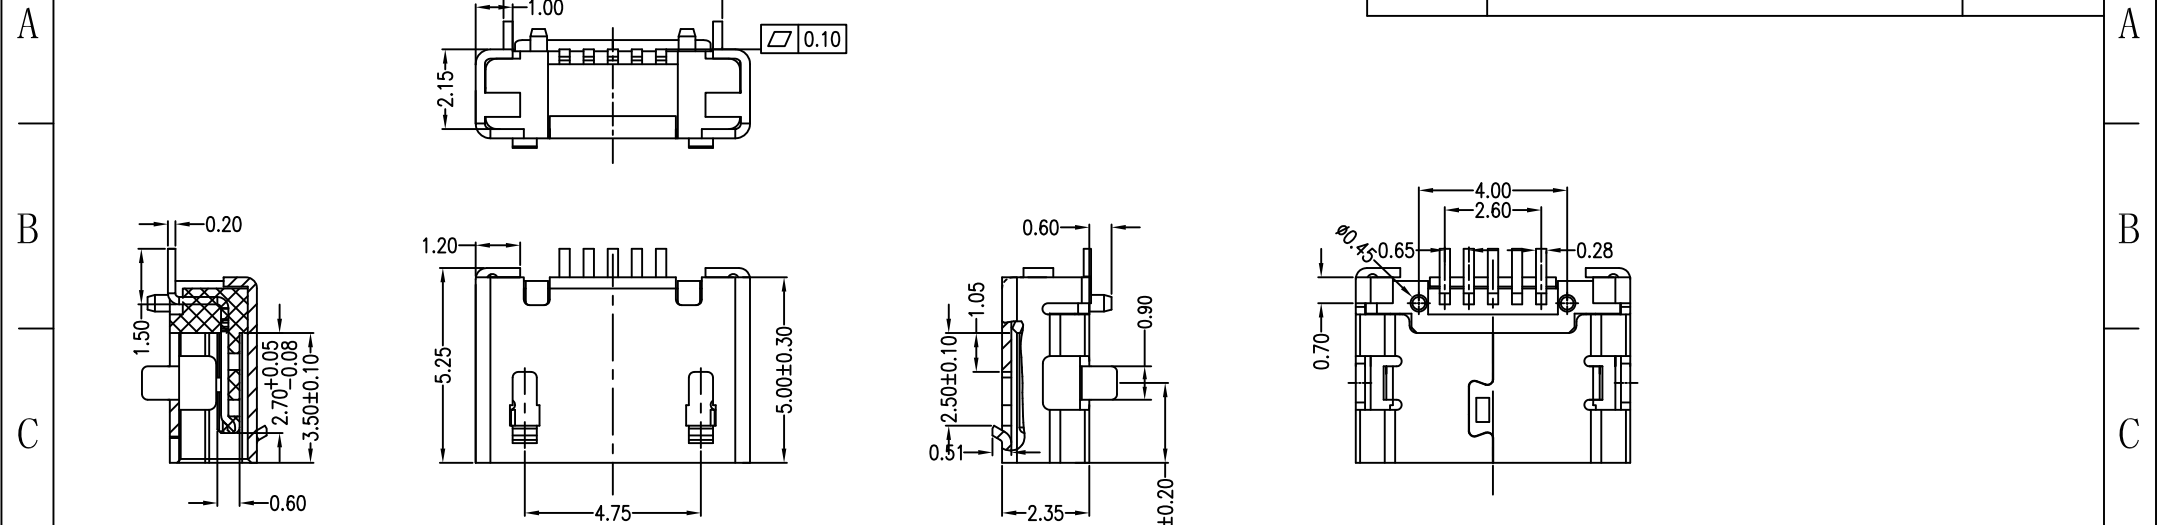

- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f,UL94v-0
 - Contact: copper alloy,t=0.20mm
 - Shell: copper alloy,t=0.25mm
 - Specification:
 - Current rating:1.5PIN 1.8A Max/2,3,4PIN 1A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 30 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.
 - Temperature range: -30°C~80°C

RECOMMENDED PCB LAYOUT PCB图仅供参考

<p>产品图 PRODUCT CHART DWG</p> <p>公差一览表 TOLERANCE UNLESS OTHERWISE</p>				<p>易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co.,Ltd.</p>			
单位 UNITS	MM	制图 DRAWING		制图料号 PRODUCT PART NO.	B920-ECC62A2021S10103		
.X	±0.30	.X	±5.°	产品名称 PRODUCT NAME	MICRO 5S B型两脚插板5.9无边有柱有后盖 加焊脚SMT长端子		
.XX	±0.25	.XX	±2.°	日期 DATE	2021-04-15	核淮 APPD	
.XXX	±0.15	.XXX	±1.°	角法 VIEW		版本 VER	
.XXX	±0.10	.XXX	±0.5°			AO	