
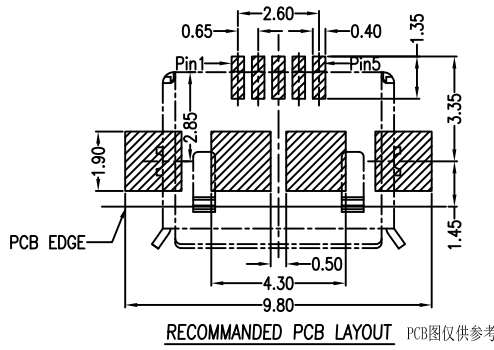


目錄 MAPX	设变内容 MODIFICATION	日期 DATE

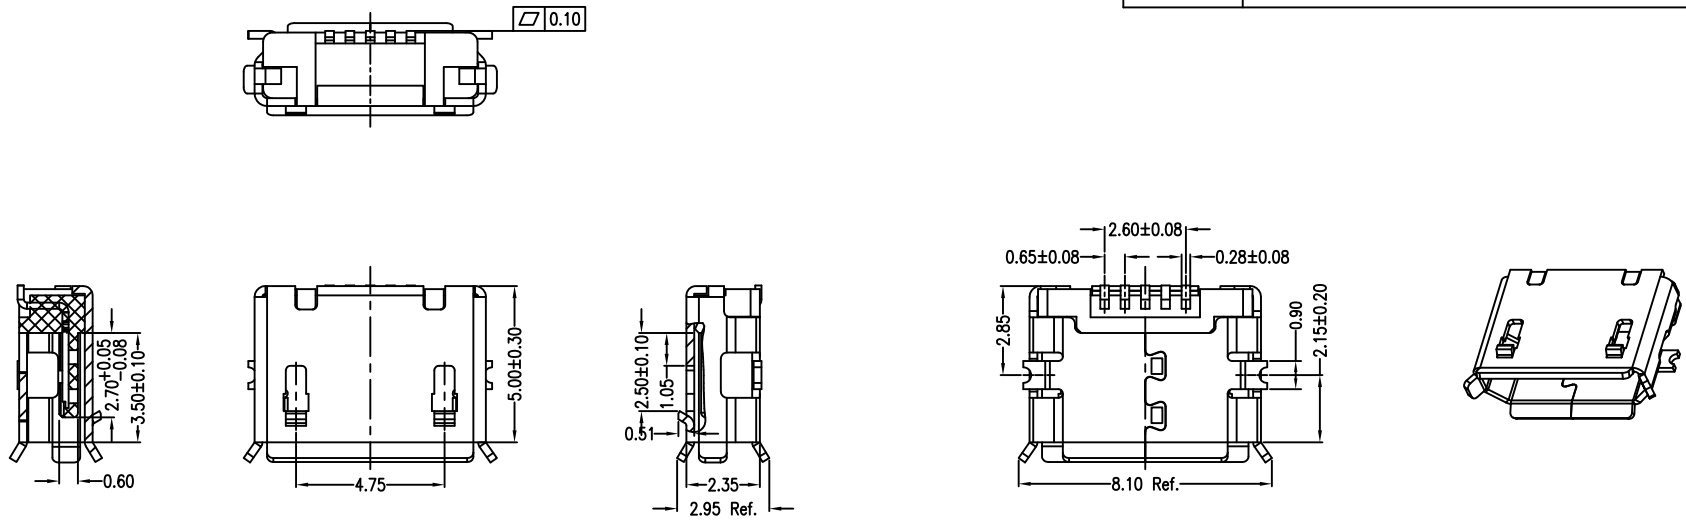

Note:

1.Material:

1.1 Housing: High temperature thermoplastic with g.f,UL94v-0

1.2 Contact: copper alloy,t=0.20mm

1.3 Shell: copper alloy,t=0.25mm

2.Specification:

2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.

2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 100 MΩ Min.

2.5 Total mating force: 3.57 Kgf Max.

2.6 Total unmating force: 1.0 Kgf Min

2.7 Temperature range: -30°C~80°C

产品图 PRODUCT CHART DWG		易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.			
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	产品料号 PRODUCT PART NO.
X.	±0.30	X'	±5'	审核 CHKD	B920-ECD52A2021S10102
.X	±0.25	.X'	±2'		产品名称 PRODUCT NO.
.XX	±0.15	.XX'	±1'	核准 APPD	角法 VIEW
.XXX	±0.10	.XXX'	±0.5'		日期 DATE
		比例 SCALE	1:1	版本 VER	A0