

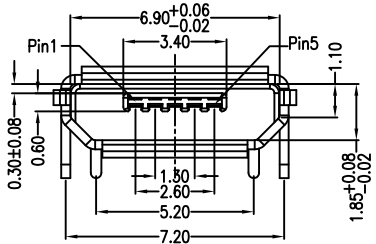




MAPX	MODIFICATION	DATE

A  
B  
C  
D  
E  
F  
G


A  
B  
C  
D  
E  
F  
G

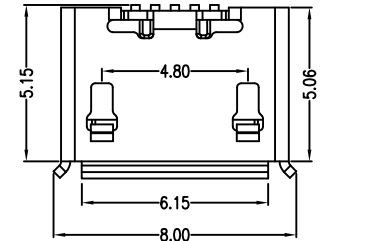


- Note:
- Material:
    - Housing: High temperature thermoplastic with g.f,UL94v-0
    - Contact: copper alloy,t=0.15mm
    - Shell: copper alloy,t=0.30mm
  - Specification:
    - Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Ma
    - Dielectric withstanding voltage: 100 V(ac) for 1 min.
    - Contact resistance: 30 mΩ Max.
    - Insulation resistance: 100 MΩ Min.
    - Total mating force: 3.57 Kgf Max.
    - Total unmating force: 1.0 Kgf Min.
    - Temperature range: -30°C~80°C

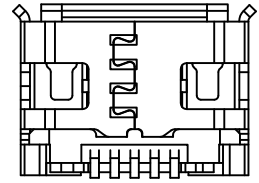


不锈钢双触点



铜壳单触点

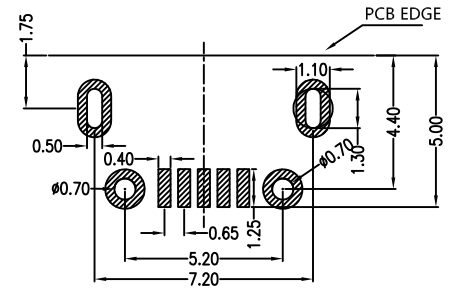

PCB图仅供参考



<b>产品图</b> PRODUCT CHART DWG							
公差一览表 TOLERANCE UNLESS OTHERWISE				易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.			
X	±0.30	X	±5.°	单位	MM	制图	制图料号
.X	±0.25	.X	±2.°	UNITS		DRAWING	PRODUCT PART NO.
.XX	±0.15	.XX	±1.°	比例	1:1	审核	产品名称
.XXX	±0.10	.XXX	±0.5°	SCALE		CHKD	PRODUCT NO.
				日期	2021-04-16	核准	角法
				DATE		APPD	VIEW
						版本 VER	
						B920-ECE52A2021S10105 MICRO 5P-F B型7.2 5.2四牛角型有卷边无柱 SMT短针黑胶卷带成品	
						A0	