RoHS		MAPX	MODIFICATION	DATE





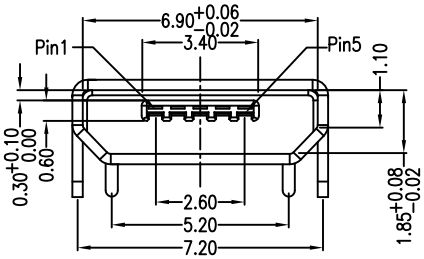









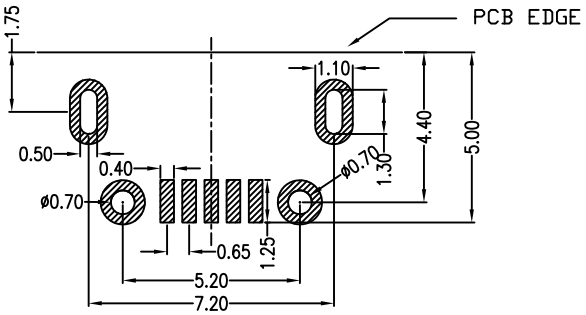

PCB图仅做参考

Note:

1.Material:

1.1 Housing: High temperature thermoplastic with g.f,UL94v−0

1.2 Contact: copper alloy,t=0.15mm

1.3 Shell: copper alloy,t=0.30mm

2.Specification:

2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.

2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.

2.3 Contact resistance: 30 mΩ Max.

2.4 Insulation resistance: 100 MΩ Min.

2.5 Total mating force: 3.57 Kgf Max.

2.6 Total unmating force: 1.0 Kgf Min.

2.7 Temperature range: −30°C~80°C

产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERMSE

X.	±0.30	X.	±5.°
.X	±0.25	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

易芯精密科技(浙江)有限公司
Easychips Precision Technology (Zhejiang) Co.,Ltd.

单位 UNITS	MM	制图 DRAWING		制图料号 PRODUCT PART NO.	B920-ECE62A2021S10104
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	MICRO 5P-F B型7.2 5.2四牛角型无卷边无柱SMT短针黑胶卷带成品
日期 DATE	2021-04-16	核准 APPD		角法 VIEW	版本 VER A0