
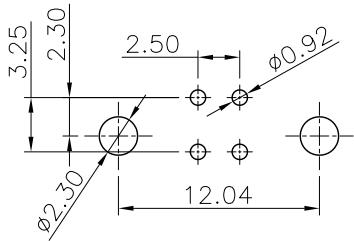


7	8	9	10
MAPX	MODIFICATION		DATE

Specifications:

- 1.Current Rating:1.0A at 30V AC.
- 2.Withstanding Voltage:
500V AC for one minute.
- 3.Insulation Resistance:1000MΩ Min.
- 4.Contact Resistance:30mΩ Max.
- 5.Mating Force:3.57kgf Max.
- 6.Unmating Force:1.02kgf Min.

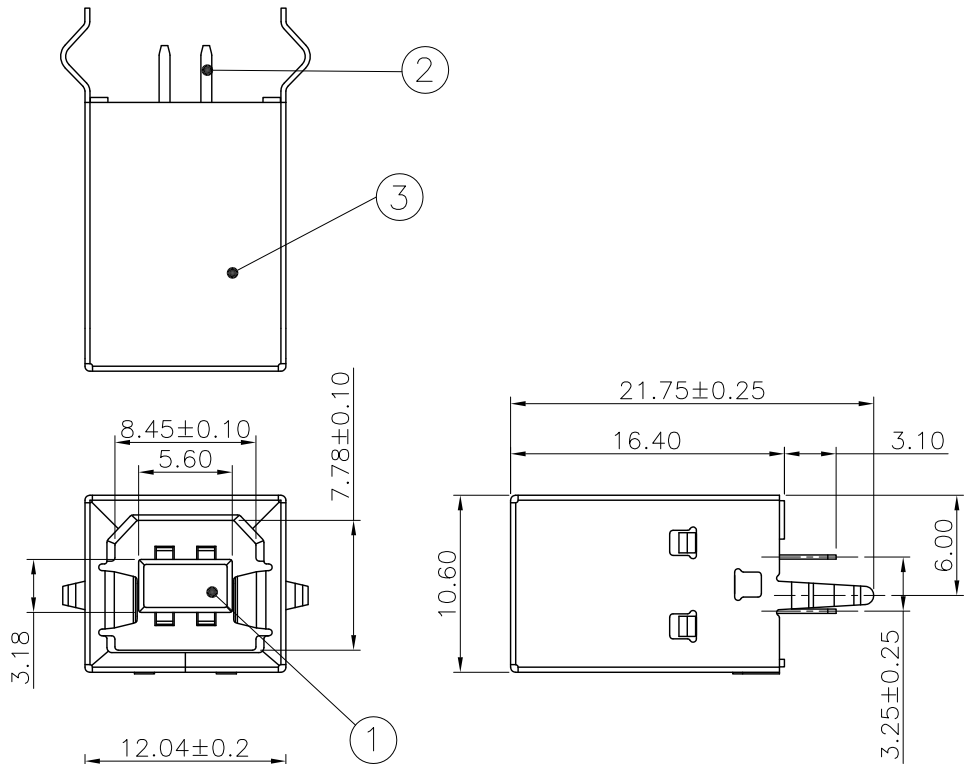

3	外壳	SPCC	——	NICKEL/GOLD PLATED
2	端子	C5191	——	GOLD/TIN PLATED
1	胶芯	PBT	WHITE/BLACK	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

产品图 PRODUCT CHART DWG 公差一览表 TOLERANCE UNLESS OTHERWISE		易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.	
单位 UNITS	MM	制图 DRAWING	Gavin
比例 SCALE	1:1	审核 CHKD	制图料号 PRODUCT PART NO.
日期 DATE	2016-09-09	核准 APPD	产品名称 PRODUCT NAME
X. ±0.35	X. ±5.°		B921-EC111A1010Y10200
.X ±0.30	.X ±2.°		BF 180度铁壳弯脚白胶
.XX ±0.20	.XX ±1.°		角法 VIEW
.XXX ±0.10	.XXX ±0.5°		版本 VER
			AD