
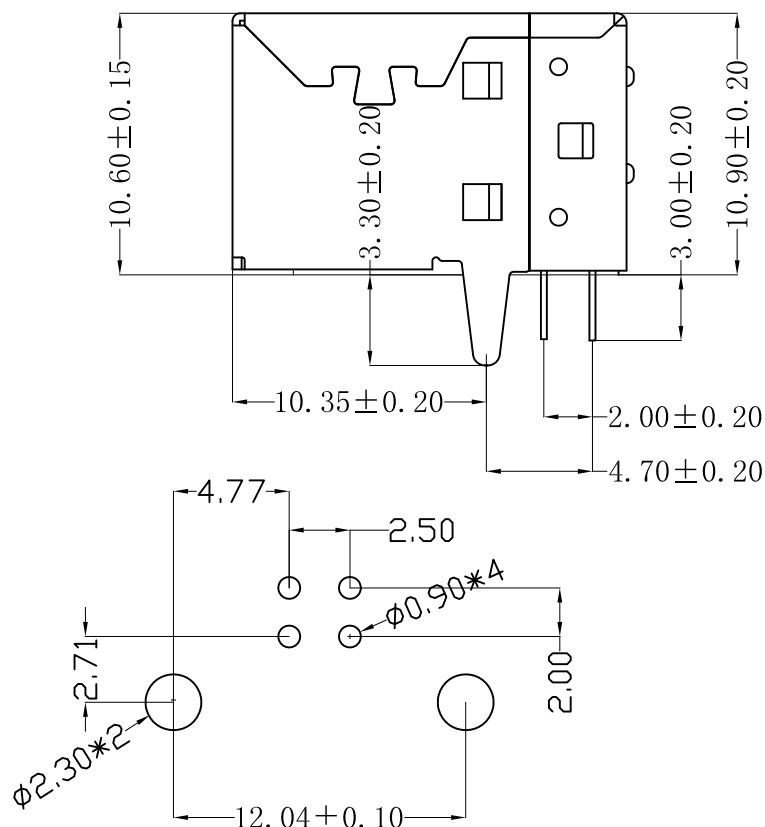
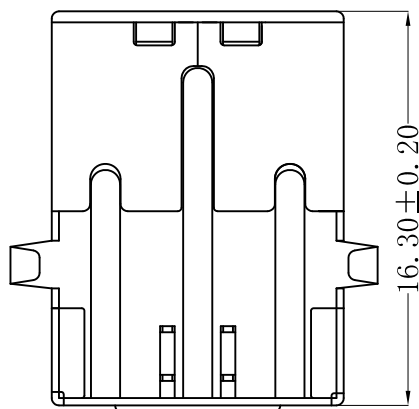


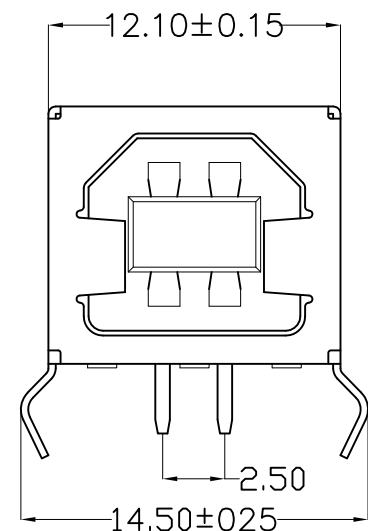

P. C. B. LAYOUT

7	8	9	10
MAPX	MODIFICATION		DATE

特性:Specifications:

电器:Electrical:

1. 接触阻抗: Contact Resistance
30 milliohms MAX
2. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
3. 绝缘抗阻: Insulation Resistance
1000MEGA ohms MIN

材料:Material:

1. 塑胶: Housing:High Temperature Thermoplastic
2. 端子: Contact:Copper Alloy 铜合金
3. 铁壳: Shell:Copper Alloy铜/铁合金

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area:
Tin On Solder Tails
接触点镀金. 脚镀锡
2. 铁壳: Shell:

Nickel Plating

镀镍

产品图 PRODUCT CHART DWG				 易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.						
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	GT	制图料号 PRODUCT PART NO.	B921-EC112A1010D10200	
X.	±0.25	X.	±5.°	比例 SCALE	1:1	审核 CHKD	GR	产品名称 PRODUCT NO.	BF 90度弯脚铜壳/白胶	
.X	±0.20	.X	±2.°	日期 DATE	2016.05.11	核准 APPD	ZY	角法 VIEW		版本 VER
.XX	±0.15	.XX	±1.°							A0
.XXX	±0.05	.XXX	±0.5°							