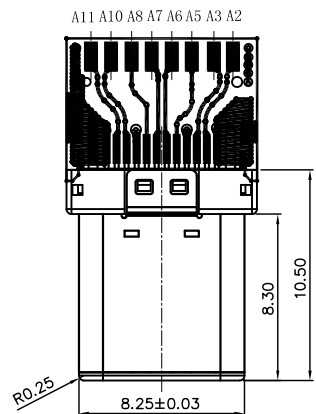


项目	零件名称	数量	材质	处理/备注
1	SHELL	1	STAINLESS	Ni: 50u"
2	Molding HOUSING	2	L.C.P	(Black)
3	GND SPRING	2	STAINLESS	Ni: 50u"
4	Insert molding 12PIN	2	L.C.P	(Black)
5	CONTACT	24	COPPER ALLOY	Contact area: gold flash, Solder tails: Tin100u", Ni: 50u"
6	PCB	1	--	--

; SPECIFICATION
MATERIAL

See drawing

STANDARD DATA

Operating temperature: -10°C ~ +60°C

Storage temperature: -20°C ~ +85°C

ELECTRICAL

Insulator resistance: 100Mohms Min.

Withstanding voltage: 100 VAC / minute

Contact resistance: initial 40mohms Max;
after 50mohms Max.

MECHANICAL

Mating force: 5~20N

Unmating force : 8~20N

Durability: 5000 cycles Min.

产品图 PRODUCT CHART DWG				易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	GT	产品料号 PRODUCT PART NO.	C918-EC118A2021A30331
X.	±0.25	X'.	±5°	比例 SCALE	1:1	审核 CHKD	GR	产品名称 PRODUCT NO.	3.1TYPE-C公头K端/C7025+ 焊板3.1+ 电容
.X	±0.20	.X'	±2°					角法 VIEW	⊕ ⊞
.XX	±0.15	.XX'	±1°	日期 DATE	2015. 07. 14	核准 APPD	ZY	版本 VER	A0
.XXX	±0.10	.XXX'	±0.5°						