
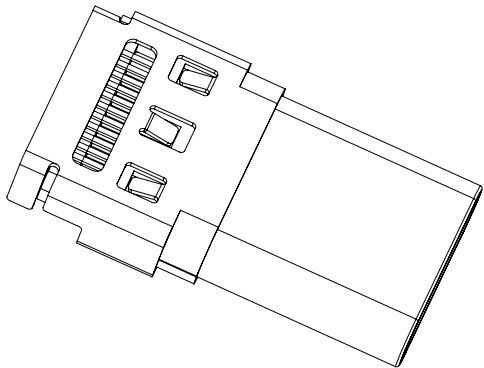






由Autodesk 教育版产品制作

由Autodesk 教育版产品制作

MAPX	MODIFICATION	DATE



- NOTES:
- MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA, 100u"
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS304-H, T=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.
SHILD: SUS304-H, T=0.12±0.03mm
 - MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES
 - ELECTRICAL:
CURRENT: 5A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
 - ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C

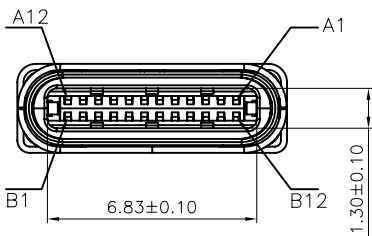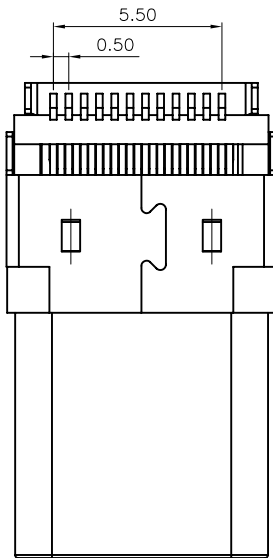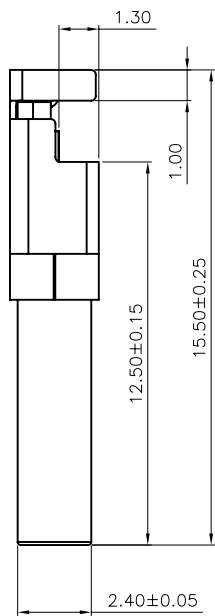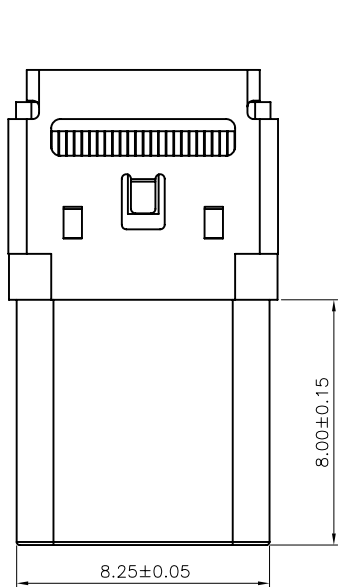

产品图 PRODUCT CHART DWG				易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.					
公差一览表 TOLERANCE UNLESS OTHERWISE				单位 UNITS	MM	制图 DRAWING	ZY	制图料号 PRODUCT PART NO.	C918-EC118A2021S40000
X.	±0.25	X.	±5.°	比例 SCALE	1:1	审核 CHKD	GT	产品名称 PRODUCT NO.	TYPE-C3.1公头12.5/15.5沉板
.XX	±0.15	.XX	±1.°	日期 DATE	2016.08.04	核准 APPD	GR	角法 VIEW	1.3两脚插板双排SMT/LCP黑胶24PIN
.XXX	±0.05	.XXX	±0.5°					版本 VER	A0

由Autodesk 教育版产品制作