
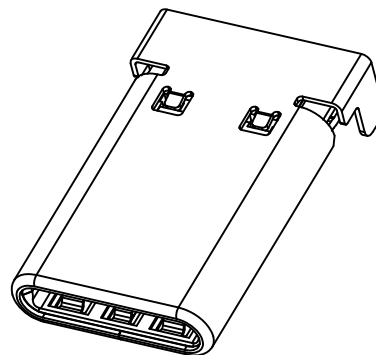


RoHS






目錄
MAPX

设变内容
MODIFICATION

日期
DATE

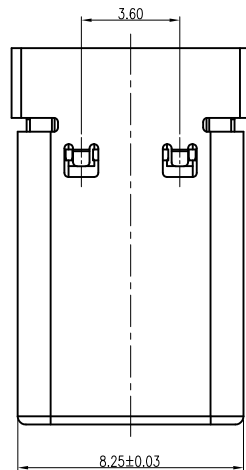


SPECIFICATION
MATERIAL
See drawing
STANDARD DATA
Rating current: 3.0 A
ELECTRICAL
Insulator resistance: 100Mohms Min.
Withstanding voltage: 100 VAC / minute
Contact resistance: 40mohms Max.
MECHANICAL
Mating force: 5~20N Max.
Unmating force : 6~20N Min.
Durability: 10,000 cycles Min.

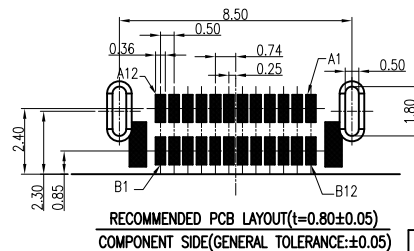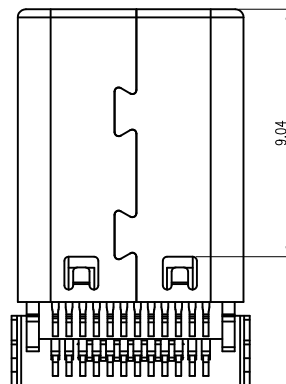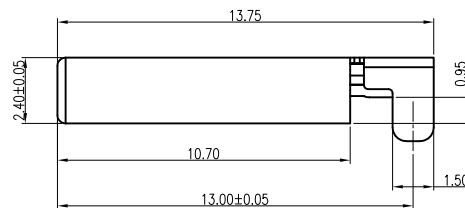

RECOMMENDED PCB LAYOUT($t=0.80\pm0.05$)
COMPONENT SIDE(GENERAL TOLERANCE: ±0.05)

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图
PRODUCT CHART DWG



易芯精密科技(浙江)有限公司
Easychips Precision Technology (Zhejiang) Co., Ltd.

公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.30	X'.	±5°
.X	±0.25	.X'	±2°
.XX	±0.20	.XX'	±1°
.XXX	±0.10	.XXX'	±0.5°

单位 UNITS	MM	制图 DRAWING	ZY	产品料号 PRODUCT PART NO.	C918-EC118A2021S40003
比例 SCALE	1:1	审核 CHKD	GR	产品名称 PRODUCT NO.	TYPE-C3, 1公头10, 7 13, 75脚合式沉板0.95 两脚插板双排SMT LCP黑胶24PIN
日期 DATE	2021-04-15	核准 APPD	GT	角法 VIEW	
				版本 VER	A0