

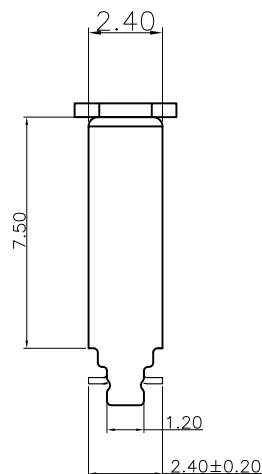


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

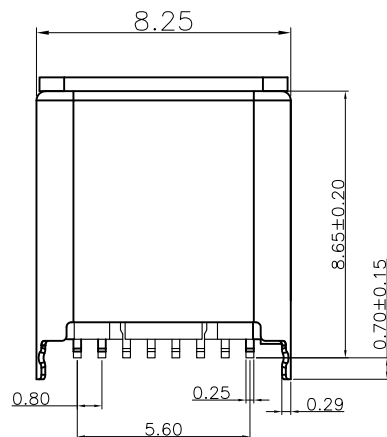

- 1.ELECTRICAL:
CURRENT:3A
CONTACT RESISTANCE:40 MILLIOHMS MAX
DIELECTRIC WITHSTANDING VOLTAGE: 200V AC
INSULATION RESISTANCE:100 MEGOHMS MIN
- 2.MECHANICAL:
MATING FORCE:5-20N
WITHDRAWAL FORCE:5-20N
DURBILITY:10000 CYCLES
- 3.ENVIRONMENTAL:
TEMPERTURE RANGE -40℃~105℃
SALT TESTING:48 HOURS



7				
6				
5				
4	PLASTIC	LCP	BLACK	UL 94V-0
3	Latch	SUS301	—	Ni Plated
2	TERMINAL	C5191-H	—	Gold Plated
1	SHELL	SUS201	—	Ni Plated
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

产品图 PRODUCT CHART DWG		易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.							
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	GT	制图料号 PRODUCT PART NO.	C918-EC118A2021Y40006		
X.	± 0.30	X.	$\pm 5.^\circ$	比例 SCALE	1:1	审核 CHKD	GR	产品名称 PRODUCT NO.	TYPE-C2.0公头立式8.65带固定脚L0.7LCP 黑胶双排SMT/16PIN+后塞
.X	± 0.25	.X	$\pm 2.^\circ$	日期 DATE	2019. 11. 23	核准 APPD	ZY	角法 VIEW	版本 VER
.XX	± 0.15	.XX	$\pm 1.^\circ$						AO
.XXX	± 0.10	.XXX	$\pm 0.5^\circ$						