



SECTION B-B

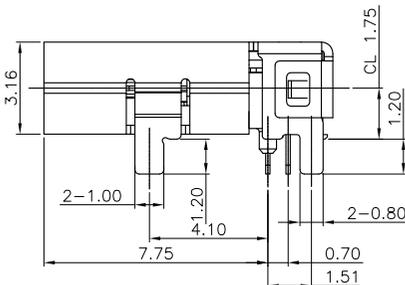

SECTION A-A

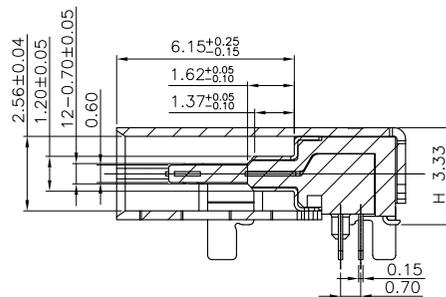

MAPX	MODIFICATION	DATE
------	--------------	------

- 备注:
- 1.1 材质:
 - 1.1 胶芯: LCP+30%G.F UL94V-0
 - 1.2 端子: COPPER ALLOY; 镍底, 镀金 $X\mu$ "
 - 1.3 外壳: SUS304; 表面镀镍 100μ "
 - 1.4 护板: SUS304;
 2. 主要特性:
 - 2.1 额定电流: 5.0A (5A MIN FOR VBUS; 0.25A MIN FOR OTHER.)
 - 2.2 接触阻抗: 40m Ω MAX
 - 2.3 绝缘阻抗: 100M Ω MIN 100V DC
 - 2.4 耐压测试: 100V AC
 - 2.5 沾锡性: 温度 $250\pm 5^{\circ}\text{C}$, 时间 $5\pm 0.5\text{s}$
 - 2.6 整体插入力: 0.50~2.00kgf MAX
整体拔出力: 0.80~2.00kgf MIN
 - 2.7 使用寿命: 10000次
 - 2.8 工作温度: $-55^{\circ}\text{C}\sim +85^{\circ}\text{C}$
- 产品料号:

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	± 0.30	X.	± 5.0
.X	± 0.25	.X	± 2.0
.XX	± 0.15	.XX	± 1.0
.XXX	± 0.10	.XXX	± 0.5



易芯精密科技(浙江)有限公司

Easychips Precision Technology (Zhejiang) Co., Ltd.

单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	C918-EC318K2023C40004
比例 SCALE	1:1	审核 CHKD	IL	产品名称 PRODUCT NO.	TYPE-C3.1板上型母座四脚插板有柱SMT+DIP 10.0L不带弹片前插后贴
日期 DATE	2019. 11. 23	核准 APPD	GT	角法 VIEW	版本 VER



版本
VER

AO