

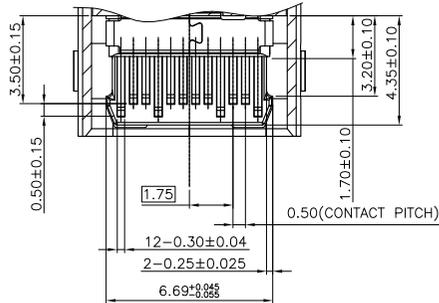



MAPX	MODIFICATION	DATE

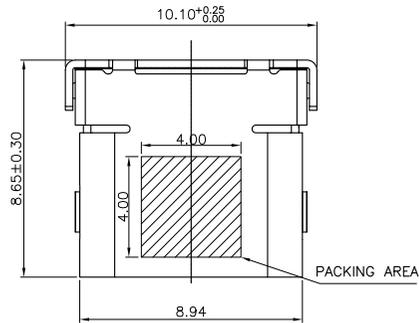



- NOTES:
- MATERIAL:
 - MOLDING: LCP UL94 V-0
 - CONTACT: COPPER ALLOY.
 - GOLD PLATED Min ON CONTACT AREA, 100u"
 - Min TIN (LEAD FREE) ON SOLDER AREA,
 - SHELL: SUS304-H, T=0.30±0.03mm
 - 50u" NICKEL PLATING OVER ALL.
 - SHILD: SUS304-H, T=0.12±0.03mm
 - MECHANICAL:
 - INSERTION: 5~20N.
 - EXTRACTION: 8~20N AFTER TEST.
 - DURABILITY: 10000 CYCLES
 - ELECTRICAL:
 - CURRENT: 5A FOR VBUS;
 - 1.25A FOR GND PIN.
 - 0.25A FOR OTHER.
 - VOLTAGE: 20 V MAX
 - WITHSTANDING VOLTAGE: 100V AC R.M.S.
 - CONTACT RESISTANCE: 40mΩ MAX.
 - INSULATION RESISTANCE: 100MΩ MIN.
 - ENVIRONMENTAL:
 - TEMPERATURE RANGE -25°C ~ +85°C

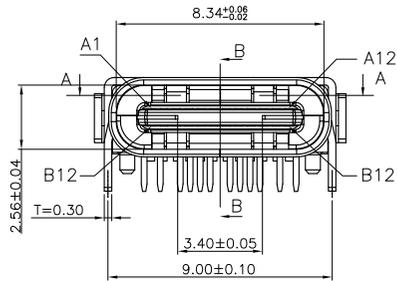

SECTION B-B



SECTION A-A

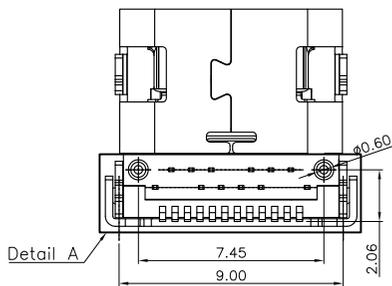

USCX-24FX-XXRX-06

- 1-G.P
- 2-RoHS
- 3-REACH
- 4-HF/无卤
- 1-卷带包装
- 2-PVC盒
- N-可焊接
- S-锡锡
- T-亮锡
- A-金
- B-半金锡 1u"
- D-半金锡 5u"
- F-半金锡 15u"
- H-半金锡 30u"
- K-黑色
- N-本色

Detail 产品图
PRODUCT CHART DWG

公差一览表
TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.05	.XXX	±0.5°

易芯精密科技(浙江)有限公司
Easychips Precision Technology (Zhejiang) Co., Ltd.

单位 UNITS	MM	制图 DRAWING	GT	制图料号 PRODUCT PART NO.	C918-EC318K2023C40005
比例 SCALE	1:1	审核 CHKD	GR	产品名称 PRODUCT NO.	TYPE-C3. 1板上型母座四脚插板有柱SMT+DIP 8.65不带弹片前插后贴
日期 DATE	2011.09.02	核准 APPD	ZY	角法 VIEW	版本 VER
					A0