



RoHS

MAPX

MODIFICATION

DRW

DATE

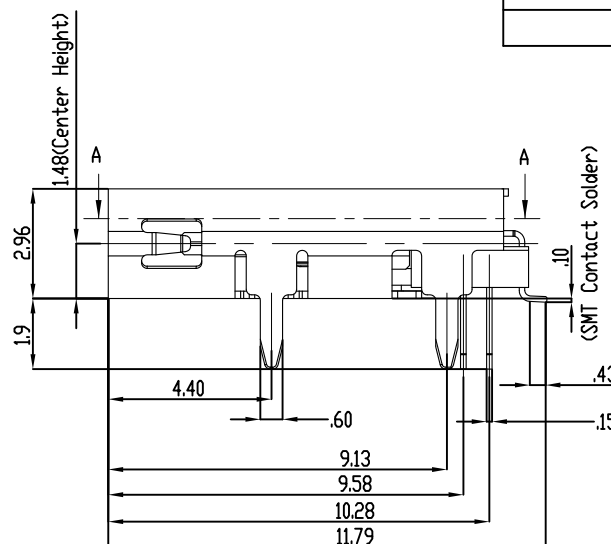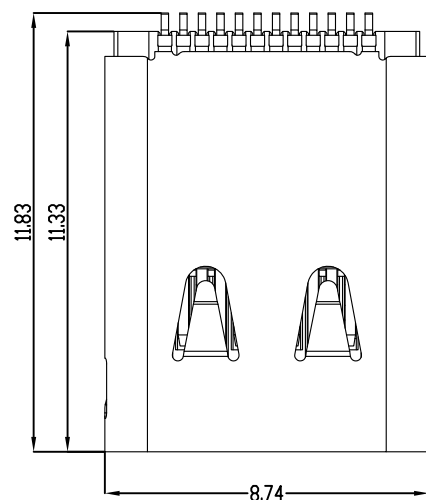

SPECIFICATION

MATERIAL

Insulator: Thermoplastic, Black

Contacts: BRASS

Shell: Stainless Steel

CONTACT PLATING

Underplate: 40u"~80u" Nickel

Contact area: 30u" Pd-Ni+2u" Selective gold,

Solder tails area: 100u"~200u" Tin (Lead Free)

ELECTRICAL

Operation voltage: 20 V

Current rating: 5 Amps max.



Insulation resistance: 100 Mohms min @ 100 VDC

Dielectric withstanding voltage: 100 VAC / minute

Temperature range: -40°C TO +105°C

Mating cycles: 10,000 insertions

Part no.

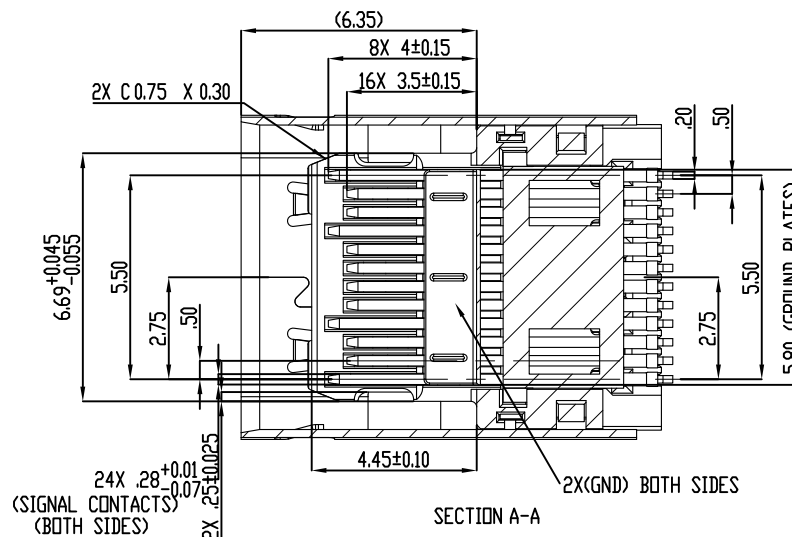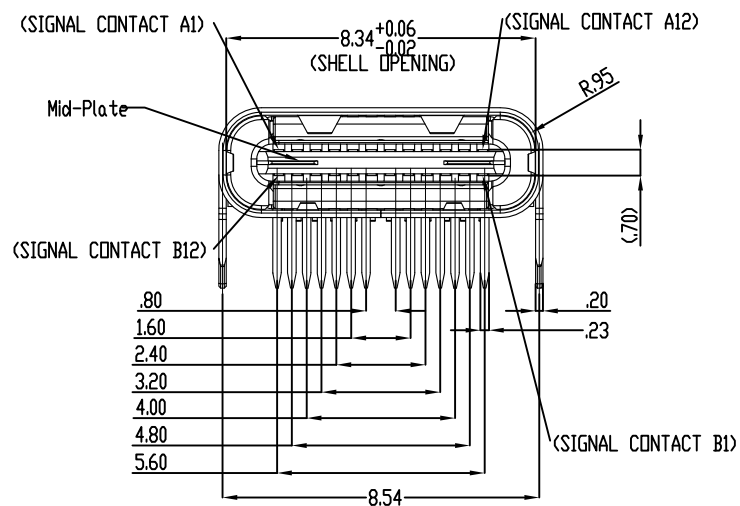

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.25	X.	±5.°
.X	±0.20	.X	±2.°
.XX	±0.05	.XX	±1.°
.XXX	±0.02	.XXX	±0.5°



易芯精密科技(浙江)有限公司

Easychips Precision Technology (Zhejiang) Co., Ltd.

单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	C918-EC318K2023C40008
比例 SCALE	1:1	审核 CHKD	GR	产品名称 PRODUCT NAME	USB Type C 24P F板上型DIP+SMT
日期 DATE	2020-05-22	核准 APPD	GT	角法 VIEW	版 VER
					AD