MAPX	MODIFICATION	DATE

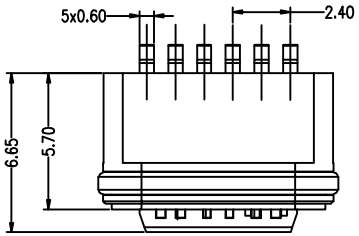













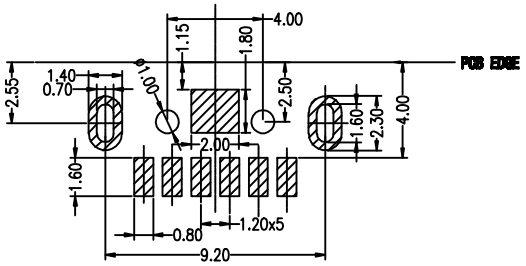

PCB LAYOUT 图仅供参考

Note:
1.Material:
1.1 Housing: PA9T
1.2 Contact:C5191,t=0.20mm
1.3 Shell: Kirsite
2.ELECTRICAL:
2-1:CURUENT RATAING:
VBUS AND GND CONTACTS RATED AT 1.25A
PARALLELED FOR A TOTAL OF 5A;
2-2:INITIAL CONTACT RESISTANCE :40 MEGOHMS
2-3:DIEELECTRIC WITHSTANDING VOLTAGE:
100V AC MIN;
3:MECHANICAL CHARACTERISTICS:
3-1:MATING FORCE:5~20N
3-2:UNMATING FORCE:8~20N(INITIAL),
6~20N(AFTER 10000 CYCLES)
3-3 :FREQUENCE: 200±50 CYCLES /HOUR,10000 CYCLES
3-4:OPERATING TEMPERATURE ;-40°~80°.
4: WATERPROOF: IP-X7.

产品图 PRODUCT CHART DWG			易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co.,Ltd.						
公差一览表 TOLERANCE UNLESS OTHERWISE			单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	C918-EC415K3028S40000	
X.	±0.30 X.	±5.°	比例 SCALE	1:1	审核 CHKD	GR	产品名称 PRODUCT NO.	TYPE-C3.1[illegible]	
.X	±0.25 .X	±2.°							
.XX	±0.15 .XX	±1.°	日期 DATE	2019.11.23	核准 APPD	GT	角法 VIEW		版本 VER	AO
.XXX	±0.10 .XXX	±0.5°							