


RoHS

MAPX

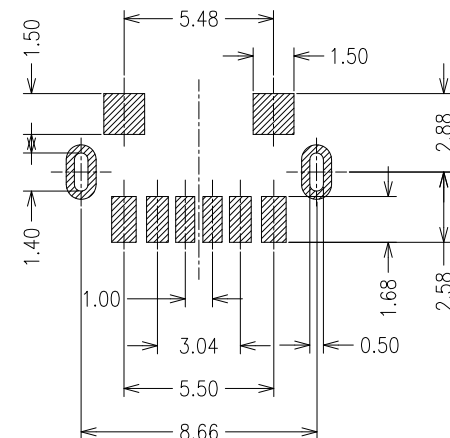
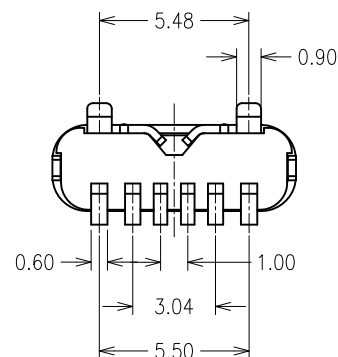

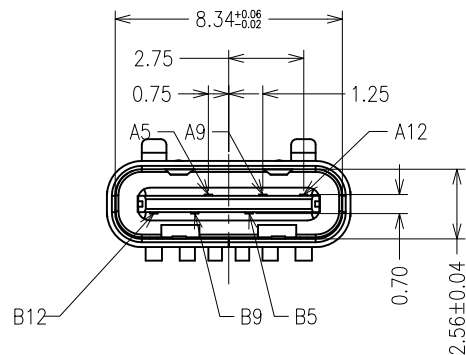


MODIFICATION

DRW

DATE



3.60

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

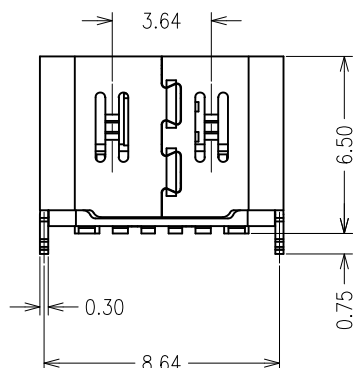
SPECIFICATION

1. ELECTRICAL CHARACTERISTICS:

- 1-1. VOLTAGE&CURRENT RATING:DC 30V MAX&3A
1-2. CONTACT RESISTANCE: 40mΩ MAX INITIAL.
1-3. INSULATION RESISTANCE:
1000MΩ MIN FOR VOLTAGE 100VDC.
1-4. DIELECTRIC WITHSTAND: 100V AC for 1 MINUTE
1-5. OPERATING TEMPERATURE: -25°C~+85°C

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERT FORCE: 5-20N Max
2-2. WITHDRAW FORCE: 5-20N Min
2-3. LIFE TEST :3,000 CYCLES




产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

A5	CC1	B12	GND	X.	±0.25	X.	±5.°
A9	VBUS	B9	VBUS	.X	±0.20	.X	±2.°
A12	GND	B5	CC2	.XX	±0.15	.XX	±1.°
PIN	SIGNAL NAME	PIN	SIGNAL NAME	.XXX	±0.10	.XXX	±0.5°

易芯精密科技(浙江)有限公司
Easychips Precision Technology (Zhejiang) Co., Ltd.

单位 UNITS	MM	制图 DRAWING	XZQ	制图料号 PRODUCT PART NO.	C918-EC418K2022Y40008
比例 SCALE	1:1	审核 CHKD	GR	产品名称 PRODUCT NO.	TYPE C3.1母座直立式两插两贴不锈钢 6.5/8.64端子SMT有弹 6PIN
日期 DATE	2016-09-09	核准 APPD	GT	角法 VIEW	版本 VER
					A0