
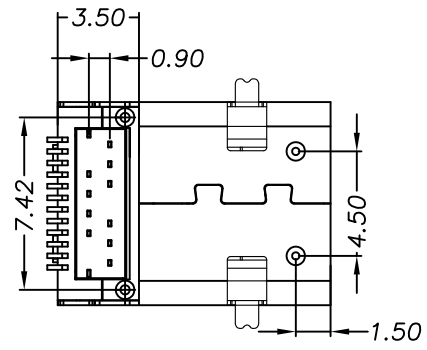
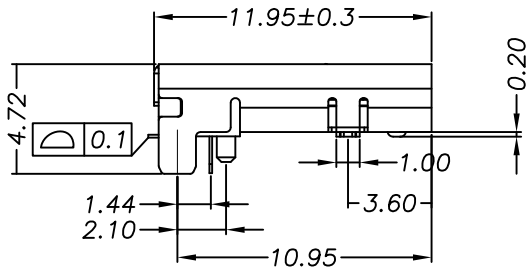
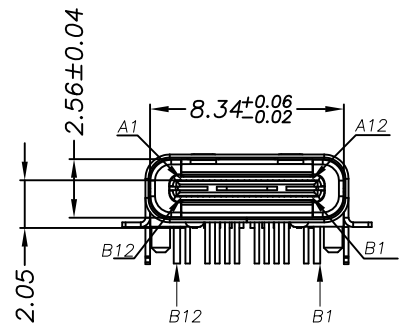
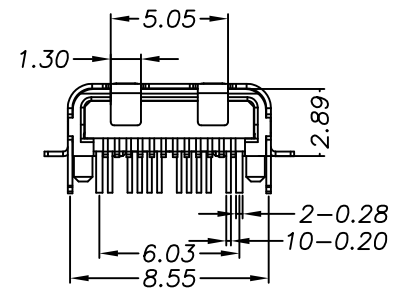
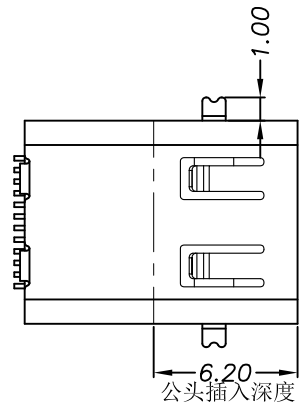



RoHS

Autodesk 教育版产品制作

目錄 MAPX	设变内容 MODIFICATION	日期 DATE
A0	NEW	09-10-20



- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. LNSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES

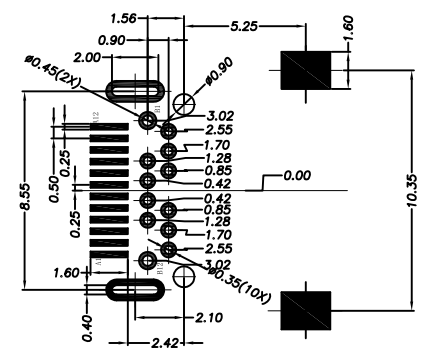

RECOMMENDED PCB LAYOUT(TOP VIEW)

A1	GND	B12	GND
A2	SSTXP1	B11	SSRXP1
A3	SSTXN1	B10	SSRXN1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXN2	B3	SSTXN2
A11	SSRXP2	B2	SSTXP2
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图 PRODUCT CHART DWG		易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.					
公差一览表 TOLERANCE UNLESS OTHERWISE		单位 UNITS	MM	制图 DRAWING	GR	产品料号 PRODUCT PART NO.	C918-EC418K2023C40004
X.	±0.30	X'.	±5°	比例 SCALE	审核 CHKD	产品名称 PRODUCT NO.	TYPE-C3.1母座11.95L/8.55四脚前贴后插LCP黑有柱端子DIP+SMT24P
.X	±0.25	.X'	±2°				
.XX	±0.30	.XX'	±1°	日期 DATE	核准 APPD	角法 VIEW	版本 VER
.XXX	±0.15	.XXX'	±0.5°				
			2009/10/20		ZY		A0

Autodesk 教育版产品制作