


MAPX	MODIFICATION	DATE

- 1.Contact Resistance:40mOHM Max.;
- 2.Dielectric Withstanding Voltage:100V AC For 1 Minute;
- 3.Insulation Resistance:100M OHM Min.;
- 4.Mating And Unmating Force:

Mating Force: 5~20N

Unmating Force: 8~20N;

6~20N AFTER TEST ;
- 5.Durability:10000 Cycles;

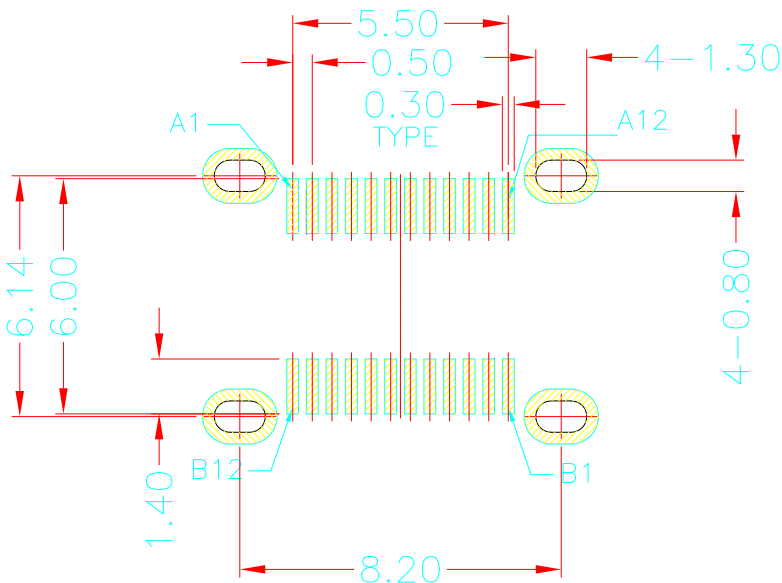

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05

Item	Title	Material	Dispose	Remark
1	Shell	Stainless Steel	Ni:30u” Min.	
2	GND Plate	Stainless Steel		
3	Mid Plate	Stainless Steel		
4	Top Contact	Copper Alloy	Mating Area: See P/N Solder Tails: Matt Tin	
5	Bottom Contact	Copper Alloy		
6	Insulator	High Temperature Plastic	UL 94V-0	Black

产品图

PRODUCT CHART DWG

公差一览表



TOLERANCE UNLESS OTHERMSE

X.	±0.30	X.	±5.°
.X	±0.25	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°


易芯精密科技(浙江)有限公司

Easychips Precision Technology (Zhejiang) Co.,Ltd.

单位	MM	制图	GR	制图料号	C918-EC418K202AF40000
UNITS		DRAWING		PRODUCT PART NO.	
比例	1:1	审核	GT	产品名称	TYPE-C3.1母座直立式15.0/10.45四脚插板端子双排SMT 24PIN
SCALE		CHKD		PRODUCT NO.	
日期	2019.11.23	核准	ZY	角法	
DATE		APPD		VIEW	
					版本
				VER	A0

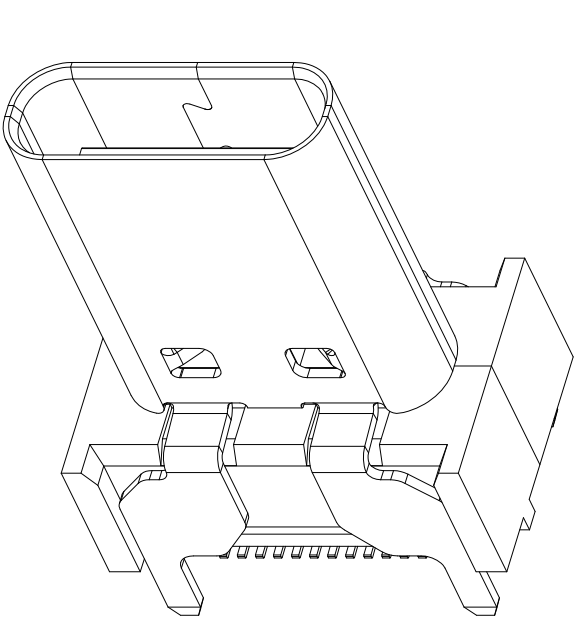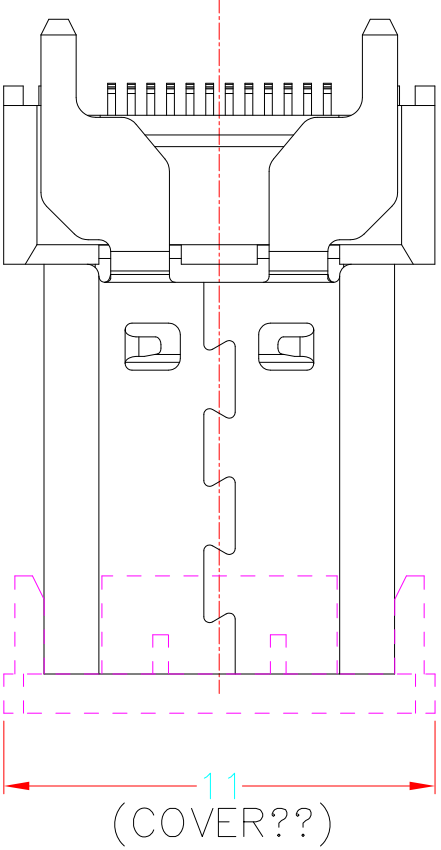

WITHOUT COVER

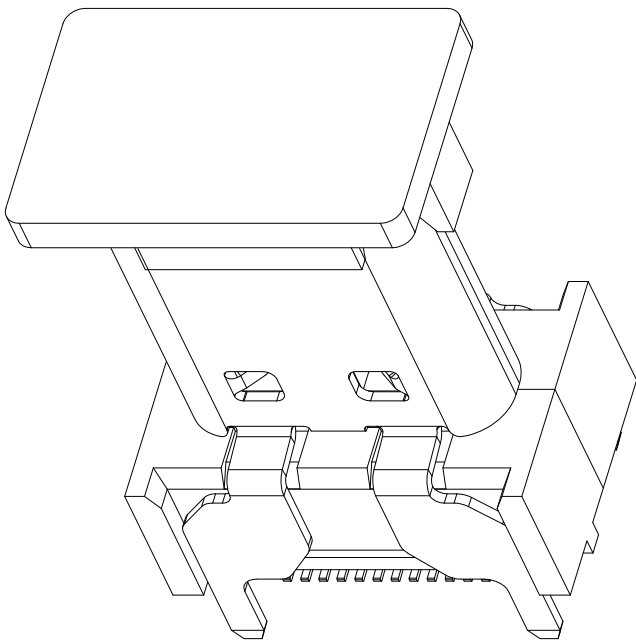

WITH COVER

