

RoHS

Autodesk 教育版产品制作

目錄
MAPX







设变内容
MODIFICATION

日期
DATE

A0

NEW

09-10-20

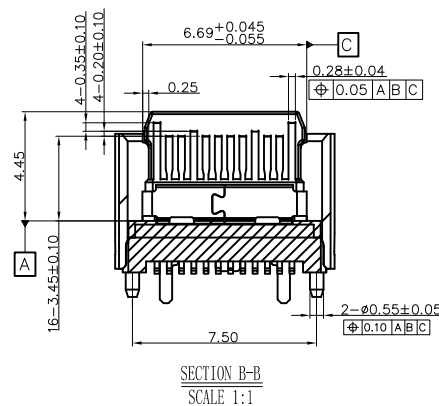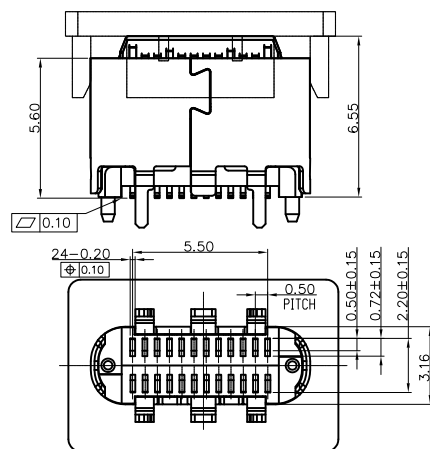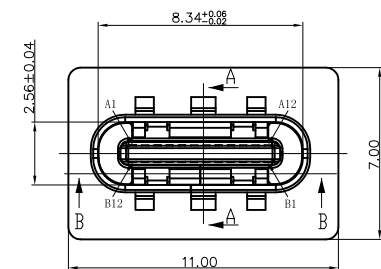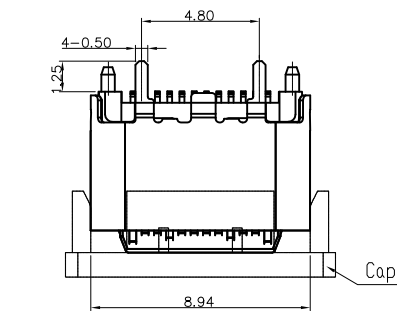

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0

CONTACT: COPPER ALLOY.

GOLD PLATING ALL OVER 50u" Min NICKEL

AND 100u"Min Tin ALL OVER 50u" Min NICKEL
ON SOLDER AREA

SHELL: SUS304-H,T=0.30±0.03mm

50u" NICKEL PLATING OVER ALL.

SHILD: SUS304-H,T=0.12±0.03mm

2.MECHANICAL:

INSERTION: 5~20N.

EXTRACTION: 8~20N AFTER TEST .

DURABILITY: 10000 CYCLES

3.ELECTRICAL:

CURRENT: 5A FOR VBUS;

1.25A FOR GND PIN.

0.25A FOR OTHER.

VOLTAGE: 20 V MAX

WITHSTANDING VOLTAGE: 100V AC R.M.S

CONTACT RESISTANCE: 40mΩ MAX.

INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE -55°C ~ +85°C

产品图

PRODUCT CHART DWG



易芯精密科技(浙江)有限公司
Easychips Precision Technology (Zhejiang) Co., Ltd.

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X'.	±5°
.X	±0.25	.X'	±2°
.XX	±0.30	.XX'	±1°
.XXX	±0.15	.XXX'	±0.5°

单位
UNITS

MM

制图
DRAWING

GT

产品料号
PRODUCT PART NO.

C918-EC418K202AY40000

比例
SCALE

1:1

审核
CHKD

GR

产品名称
PRODUCT NO.

TYPE-C3.1母座直立式四脚有柱双排贴片
5.6LCP黑胶24PIN

日期
DATE

2009/10/20

核准
APPD

ZY

角法
VIEW

角法
VIEW

版本
VER

A0

Autodesk 教育版产品制作

Autodesk 教育版产品制作