
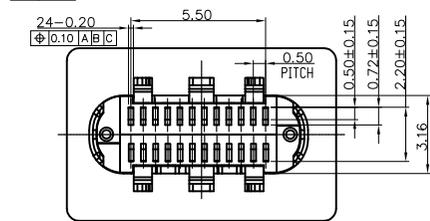
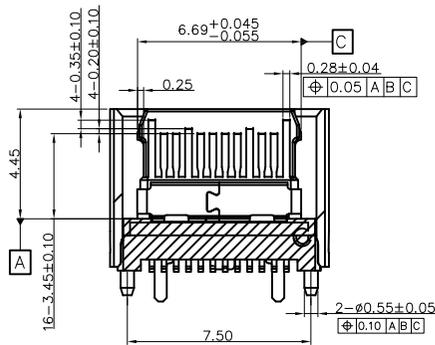
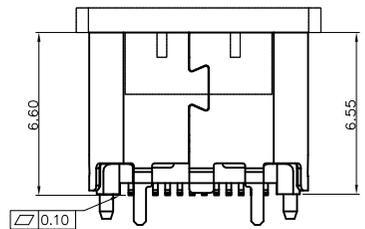

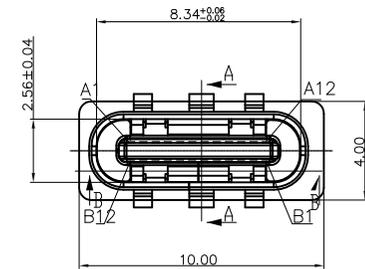



RoHS

| | | |
|------------|----------------------|------------|
| 目錄 MAPX | 设变内容 MODIFICATION | 日期 DATE |
| A0 | NEW | 09-10-20 |

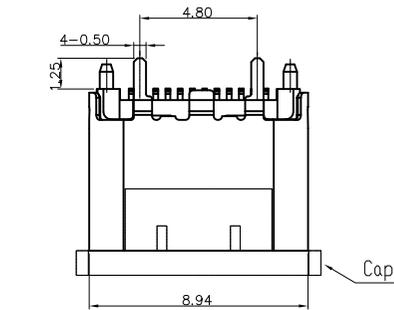

NOTES:

- MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATING ALL OVER 50u" Min NICKEL AND 100u" Min Tin ALL OVER 50u" Min NICKEL ON SOLDER AREA
SHELL: SUS304-H,T=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.
SHILD: SUS304-H,T=0.12±0.03mm
- MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST .
DURABILITY: 10000 CYCLES
- ELECTRICAL:
CURRENT: 5A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
- ENVIRONMENTAL
TEMPERATURE RANGE -55°C ~ +85°C

| | | | | | | | |
|-------------------------------------|-------|---|-------|---------------|------------|--------------------------|-------------------------------------|
| 产品图 PRODUCT CHART DWG | | 易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd. | | | | | |
| 公差一览表 TOLERANCE UNLESS OTHERWISE | | 单位 UNITS | MM | 制图 DRAWING | GR | 产品料号 PRODUCT PART NO. | C918-EC418K202AY40001 |
| X. | ±0.30 | X' | ±5' | 比例 SCALE | 审核 CHKD | 产品名称 PRODUCT NO. | TYPE-C3.1母座直立式四脚有柱双排贴片6.5LCP黑胶24PIN |
| .X | ±0.25 | .X' | ±2' | | | | |
| .XX | ±0.30 | .XX' | ±1' | 日期 DATE | 核准 APPD | 角法 VIEW | 版本 VER |
| .XXX | ±0.15 | .XXX' | ±0.5' | 2009/10/20 | ZY | ⊕ ⊖ | A0 |