



RoHS

MAPX


MODIFICATION

DRW





DATE

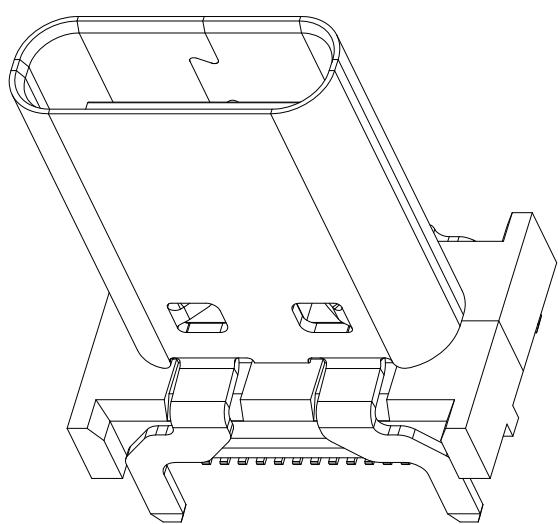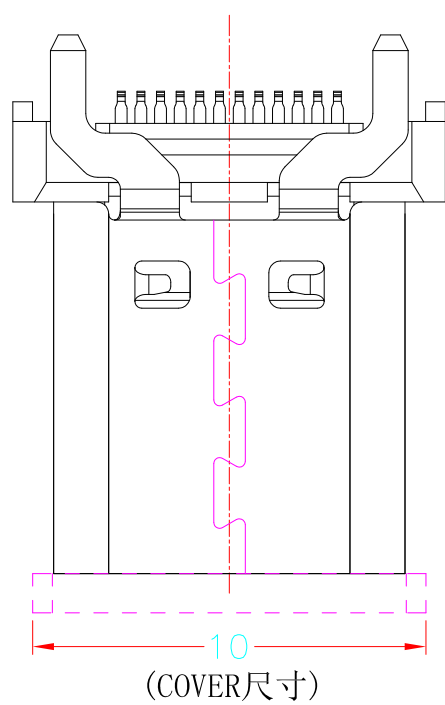

WITHOUT COVER

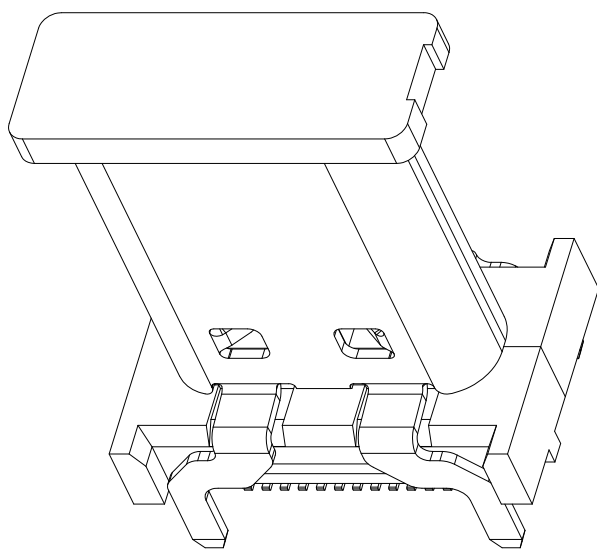


WITH COVER

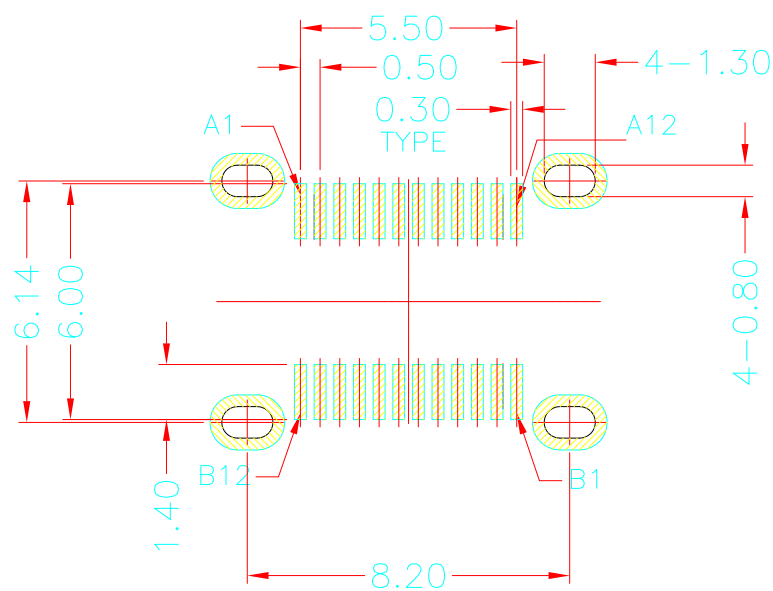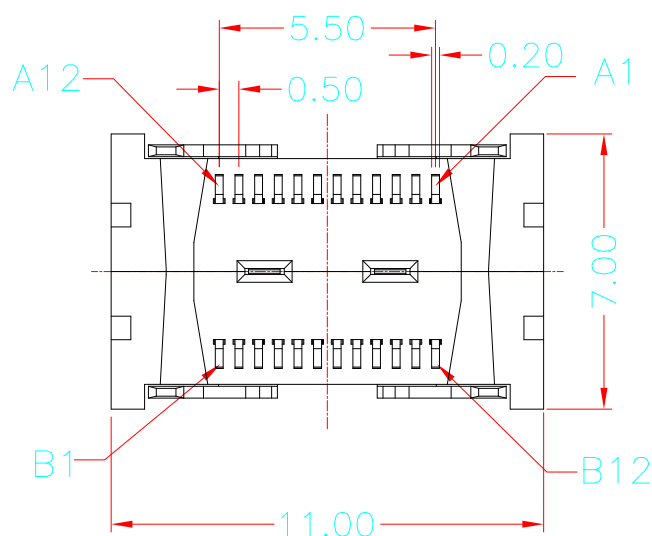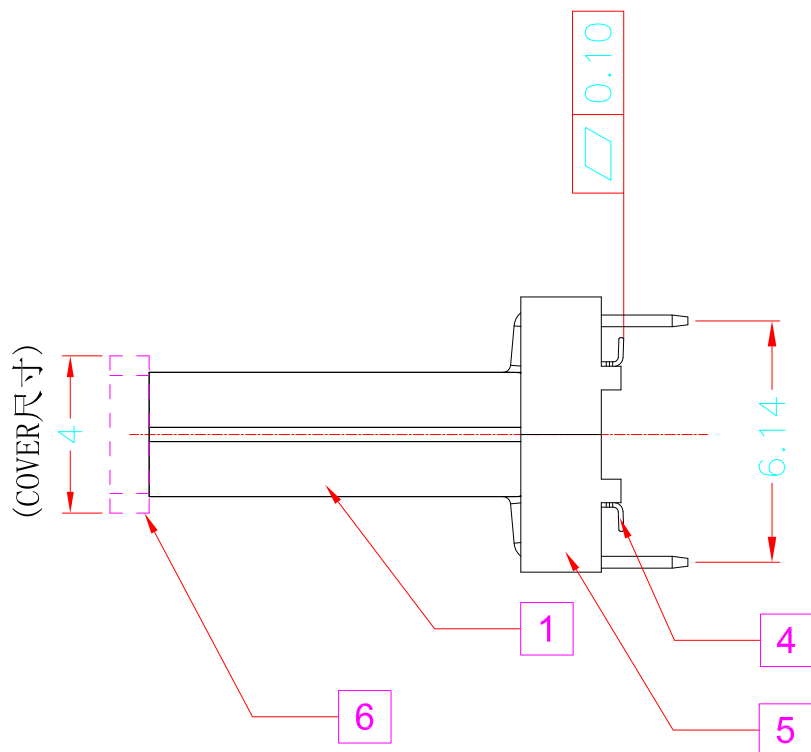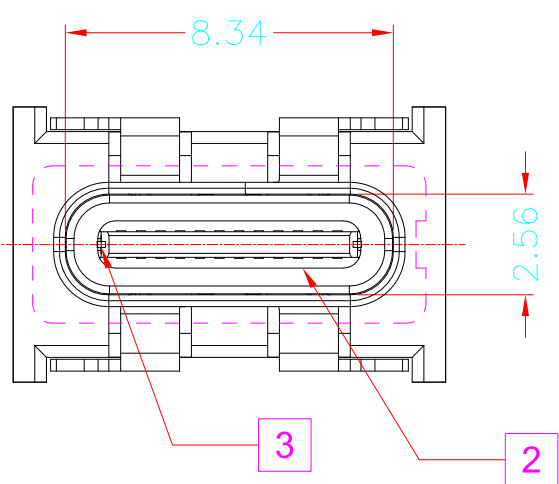

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05

KEEP OUT AREA

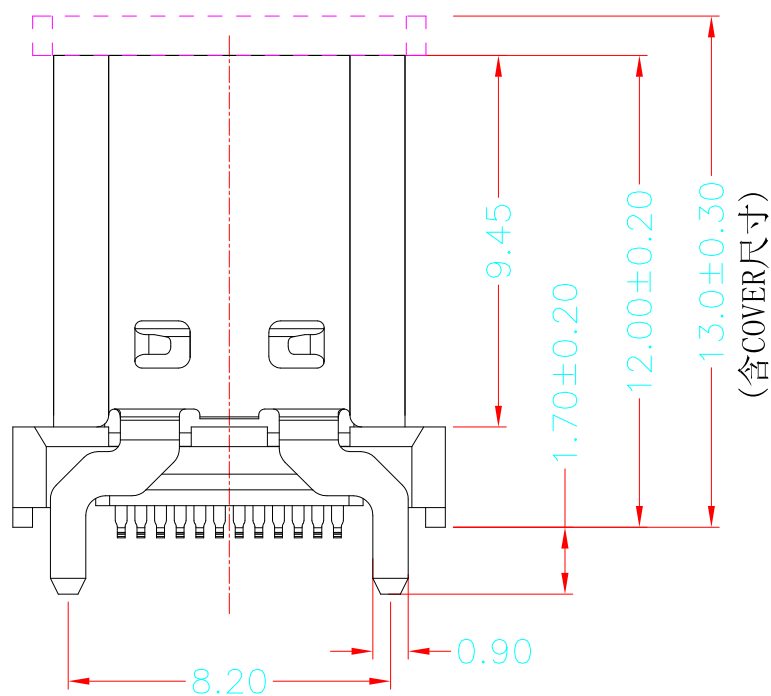

- 1.Contact Resistance:40mOHM Max.;
2.Dielectric Withstanding Voltage:100V AC For 1 Minute;
3.Insulation Resistance:100M OHM Min.;
4.Mating And Unmating Force:
Mating Force: 5~20N
Unmating Force: 8~20N;
6~20N AFTER TEST;
5.Durability:10000 Cycles;


产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	± 0.25	X.	$\pm 5.^\circ$
.X	± 0.15	.X	$\pm 2.^\circ$
.XX	± 0.10	.XX	$\pm 1.^\circ$
.XXX	± 0.05	.XXX	$\pm 0.5^\circ$



易芯精密科技(浙江)有限公司

Easychips Precision Technology (Zhejiang) Co.,Ltd.

单位 UNITS	MM	制图 DRAWING	YANG	制图料号 PRODUCT PART NO.	C918-EC418K202AY40004
比例 SCALE	1:1	审核 CHKD	GT	产品名称 PRODUCT NO.	TYPE-C3.1插座直立式四脚有柱双排贴片12.0LCP黑胶24PIN
日期 DATE	2020-05-22	核准 APPD	GR	角法 VIEW	版本 VER

G