





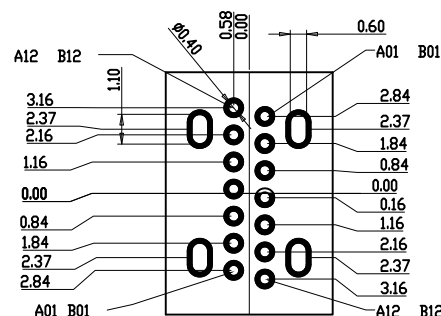


- 1-1. CONTACT RESISTANCE: 30mΩ MAX.
- 1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
- 1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
2. MECHANICAL CHARACTERISTICS:
 - 2-1. INSERTION FORCE :0.5-2.0kgf(REF.)
 - 2-2. WITHDRAWAL FORCE :0.8-2.0kgf(REF.)
3. LIFE TEST: 10,000 CYCLES.
4. TO CONFORM TO THE KRCONN HAZARDOUS SUBSTANCE FREE SPEC.

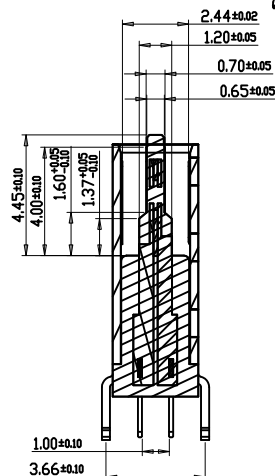

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$



截面 1-1



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DN2
A7	DN1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X'	±5°
.X	±0.25	.X*	±2°
.XX	±0.30	.XX*	±1°
.XXX	±0.15	.XXX*	±0.5°



易芯精密科技(浙江)有限公司
Easychips Precision Technology (Zhejiang) Co., Ltd.

单位 UNITS	MM	制图 DRAWING	YANG	产品料号 PRODUCT PART NO.	C918-EC468K2029E50002		
比例 SCALE	1:1	审核 CHKD	GR	产品名称 PRODUCT NO.	TYPE-C3.1母座四脚直立式夹板 间距1.0长度9.3LCP塑胶 14PIN		
日期 DATE	2009/10/20	核准 APP	ZY	角法 VIEW		版本 VER	A0