


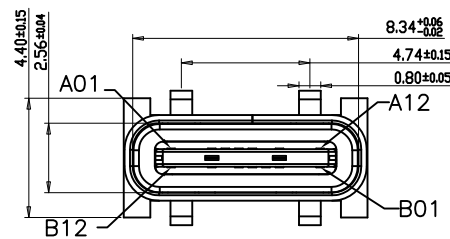
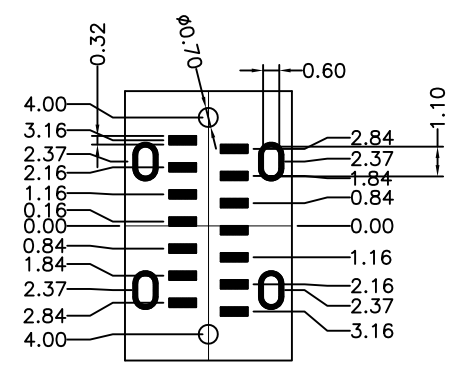




目錄 MAPX	設 變 內 容 MODIFICATION	日 期 DATE
A0	NEW	09-10-20

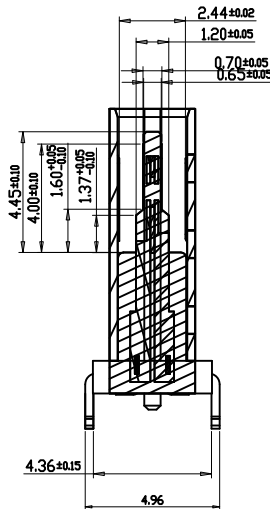

- SPECIFICATIONS:
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC
 - MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE :0.5-2.0KgF(REF.)
 - WITHDRAWAL FORCE :0.8-2.0KgF(REF.)
 - LIFE TEST: 10,000 CYCLES.
 - TO CONFORM TO THE KRCONN HAZARDOUS SUBSTANCE FREE SPEC.

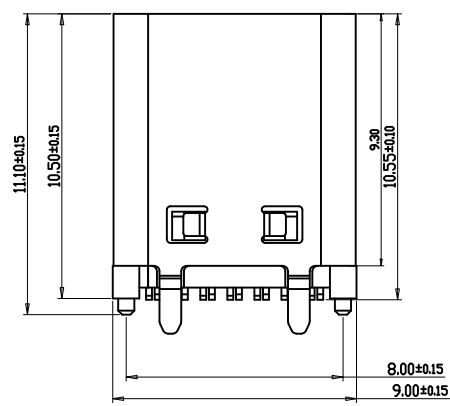

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

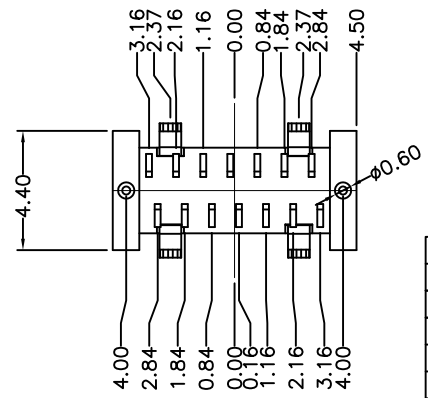

截面 1-1

6	SHELL	STAINLESS STEEL	Ni Plated	1PCS
5	SHIELDING PLATE	STAINLESS STEEL	---	1PCS
4	MD	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1		
A6	DP1	B7	DN2
A7	DN1	B6	DP2
		B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图 PRODUCT CHART DWG			
公差一览表 TOLERANCE UNLESS OTHERWISE			
X.	±0.30	X'.	±5°
.X	±0.25	.X'.	±2°
.XX	±0.30	.XX'.	±1°
.XXX	±0.15	.XXX'.	±0.5°

易芯精密科技(浙江)有限公司 Easychips Precision Technology (Zhejiang) Co., Ltd.			
单位 UNITS	MM	制图 DRAWING	YANG
比例 SCALE	1:1	审核 CHKD	GR
日期 DATE	2009/10/20	核准 APPD	GT
产品料号 PRODUCT PART NO.	C918-EC468K2029Y50000		
产品名称 PRODUCT NO.	TYPE C3.1母座直立式四脚有柱双排 贴片10.5LCP黑胶 14PIN		
角法 VIEW	⊙ ⊞	版本 VER	A0