



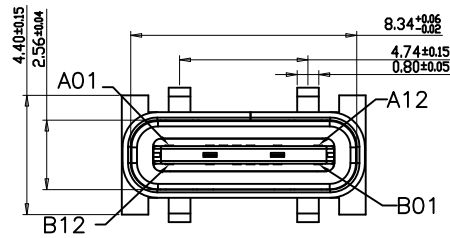

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

1-1. CONTACT RESISTANCE: 30mΩ MAX.

1-2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC FOR ONE MINUTE.

1-3. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500 VDC




2. MECHANICAL CHARACTERISTICS:

2-1. INSERTION FORCE :0.5-2.0KgF(REF.)


2-2. WITHDRAWAL FORCE :0.8-2.0KgF(REF.)

3. LIFE TEST: 10,000 CYCLES.


4. TO CONFORM TO THE KRCONN HAZARDOUS SUBSTANCE FREE SPEC.

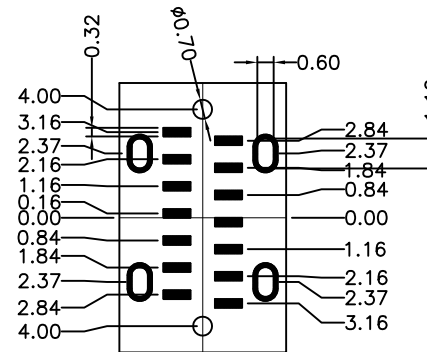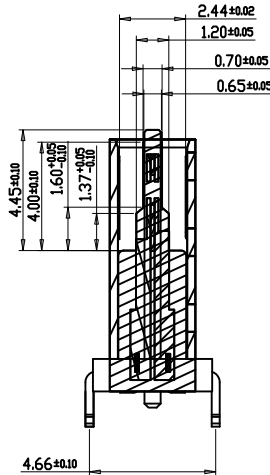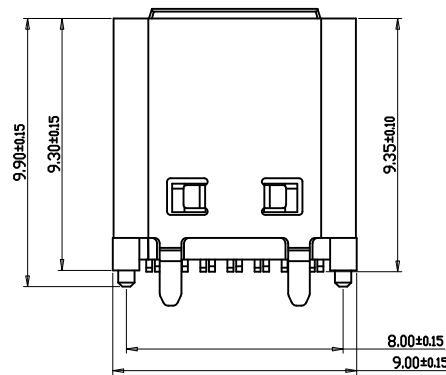

RECOMMENDED P.C.B. LAYOUT (T:1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm



截面 1-1

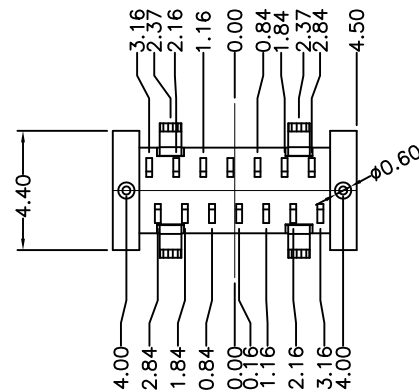

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B7	DN2
A6	DP1	B6	DP2
A7	DN1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X'.	±5°
.X	±0.25	.X'	±2°
.XX	±0.30	.XX'	±1°
.XXX	±0.15	.XXX'	±0.5°



易芯精密科技(浙江)有限公司

Easychips Precision Technology (Zhejiang) Co., Ltd.

单位 UNITS	MM	制图 DRAWING	YANG	产品料号 PRODUCT PART NO.	C918-EC468K2029Y50002
比例 SCALE	1:1	审核 CHKD	GR	产品名称 PRODUCT NO.	TYPE C3.1母座直立式四脚有柱 双排贴片9.3LCP黑胶 14PIN
日期 DATE	2009/10/20	核准 APPD	ZR	角法 VIEW	版本 VER